

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P697010

Luminaire Tested: **MRI-FEU4C-05-L927 F4X-M-X-H**

Issue Date: 08/03/2023



Test Information

Test Method: LM-79-08
Report Number: P697010
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207151)
Test Lab: INNOVATION CENTER-P3
Issue Date: 08/03/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: MRI-FEU4C-05-L927 F4X-M-X-H
Description: 4 INCH FAIL-SAFE MRI LED DOWNLIGHT WITH 2700K, 90 CRI LEDS, 4LBMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 473.0 lumens
Efficiency: N/A
Efficacy: 65.7 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P697010
CATALOG NUMBER: MRI-FEU4C-05-L927 F4X-M-X-H

Luminous Intensity Polar Plot

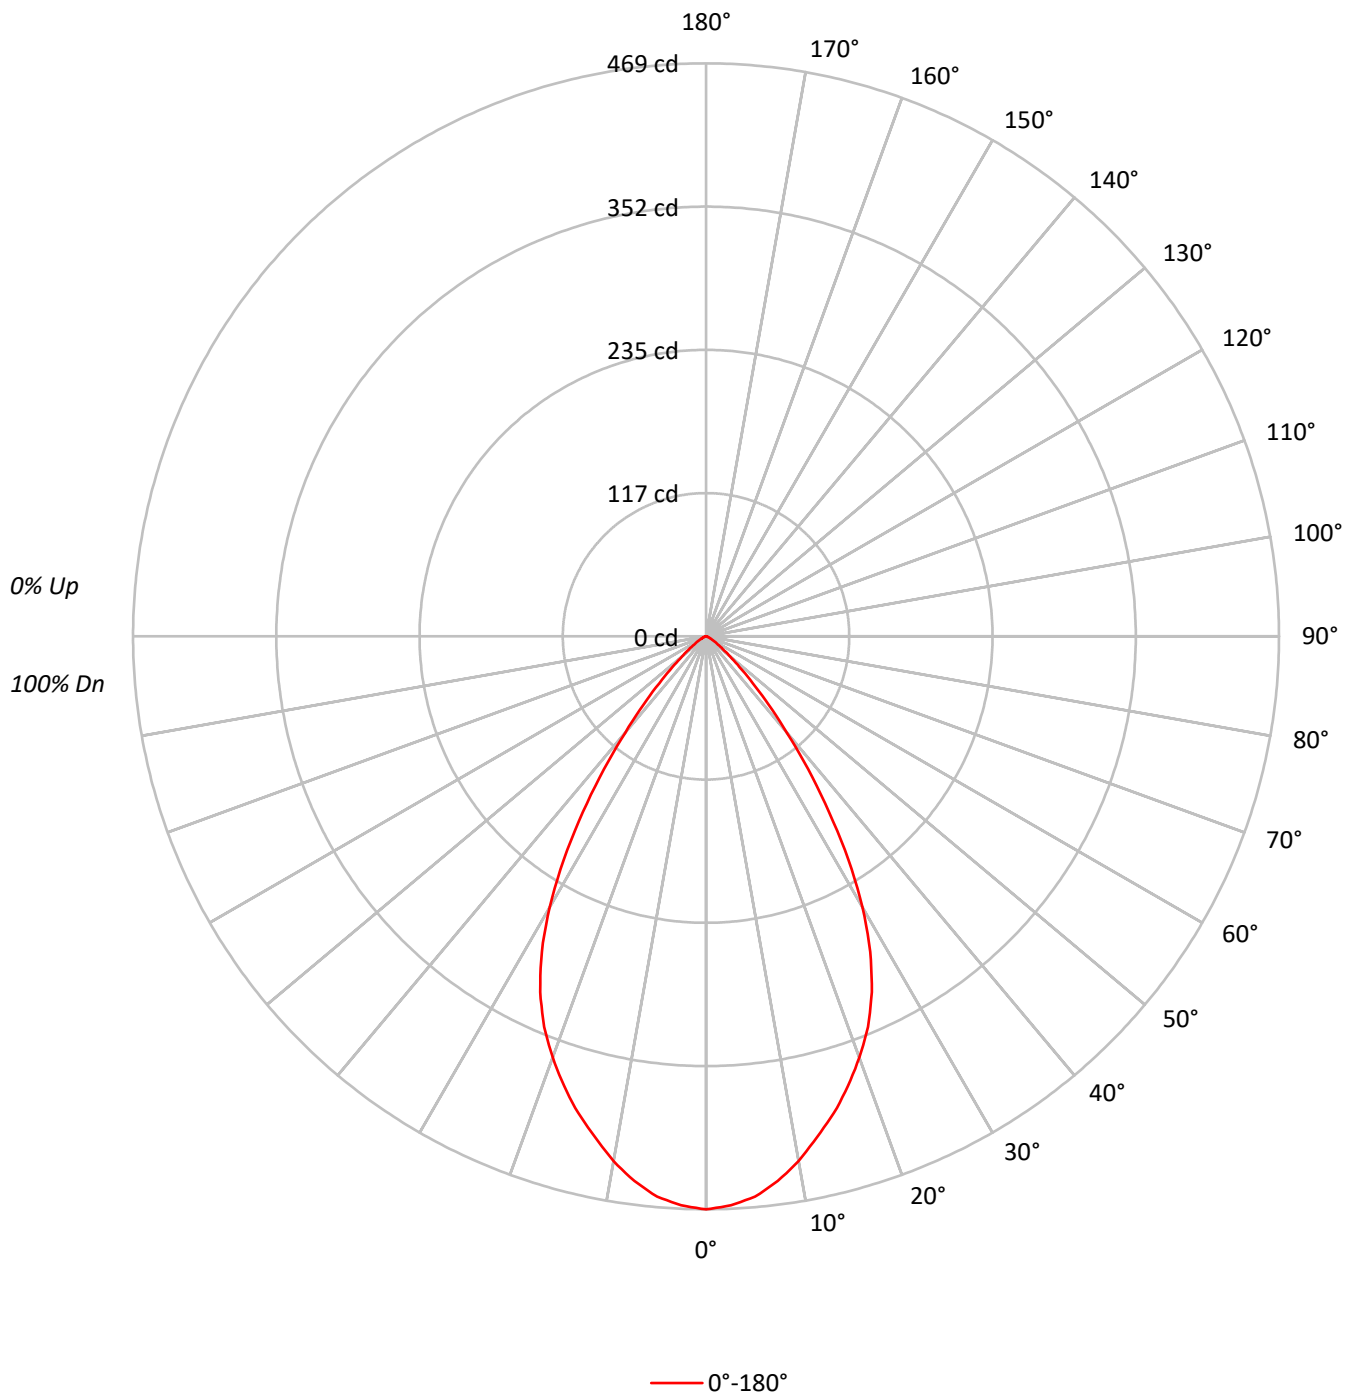



TEST NUMBER: P697010

CATALOG NUMBER: MRI-FEU4C-05-L927 F4X-M-X-H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	108	105		111	108	106	104		104	102	100		100	99	97		97	96	95
2	107	102	98	94		105	100	96	93		97	94	91		94	91	89		91	89	87
3	101	94	89	85		99	93	88	84		90	86	83		88	84	82		86	83	80
4	96	88	82	77		94	86	81	77		84	80	76		82	78	75		80	77	74
5	90	82	75	71		89	81	75	70		79	74	70		77	73	69		75	72	69
6	86	76	70	65		84	75	69	65		74	68	64		72	68	64		71	67	64
7	81	71	65	60		80	70	64	60		69	64	60		68	63	59		67	62	59
8	77	67	60	56		75	66	60	56		65	59	56		64	59	55		63	58	55
9	73	63	56	52		72	62	56	52		61	56	52		60	55	52		59	55	52
10	69	59	53	49		68	59	53	49		58	52	49		57	52	48		56	52	48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	57618
5°	56778
10°	54415
15°	51396
20°	47968
25°	43540
30°	36358
35°	26336
40°	16486
45°	9417
50°	4912
55°	2763
60°	1745
65°	1047
70°	754
75°	332
80°	495
85°	0



TEST NUMBER: P697010
 CATALOG NUMBER: MRI-FEU4C-05-L927 F4X-M-X-H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	43.2	9.1
10°-20°	113.2	23.9
20°-30°	145.5	30.8
30°-40°	109.5	23.1
40°-50°	44.0	9.3
50°-60°	12.5	2.6
60°-70°	4.0	0.8
70°-80°	1.1	0.2
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	301.9	63.8
0°-40°	411.3	87.0
0°-60°	467.8	98.9
0°-90°	473.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	473.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	469	
5°	460	43
15°	404	113
25°	321	145
35°	176	109
45°	54	44
55°	13	13
65°	4	4
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P697010

CATALOG NUMBER: MRI-FEU4C-05-L927 F4X-M-X-H

CANDELA DISTRIBUTION (FULL):

	0°
0°	469.0
2.5°	466.2
5°	460.4
7.5°	449.7
10°	436.2
12.5°	419.8
15°	404.1
17.5°	386.2
20°	366.9
22.5°	346.2
25°	321.2
27.5°	291.2
30°	256.3
32.5°	217.0
35°	175.6
37.5°	137.1
40°	102.8
42.5°	75.7
45°	54.2
47.5°	37.1
50°	25.7
52.5°	17.9
55°	12.9
57.5°	9.3
60°	7.1
62.5°	5.0
65°	3.6
67.5°	2.9
70°	2.1
72.5°	1.4
75°	0.7
77.5°	0.7
80°	0.7
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)