

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P697070

Luminaire Tested: **MRI-FEU4C-05-L930 F4X-W-X-H**

Issue Date: 08/03/2023



Test Information

Test Method: LM-79-08
Report Number: P697070
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)
Test Lab: INNOVATION CENTER-P3
Issue Date: 08/03/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: MRI-FEU4C-05-L930 F4X-W-X-H
Description: 4 INCH FAIL-SAFE MRI LED DOWNLIGHT WITH 3000K, 90 CRI LEDS, 4LBWH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 547.0 lumens
Efficiency: N/A
Efficacy: 76.0 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P697070
CATALOG NUMBER: MRI-FEU4C-05-L930 F4X-W-X-H

Luminous Intensity Polar Plot

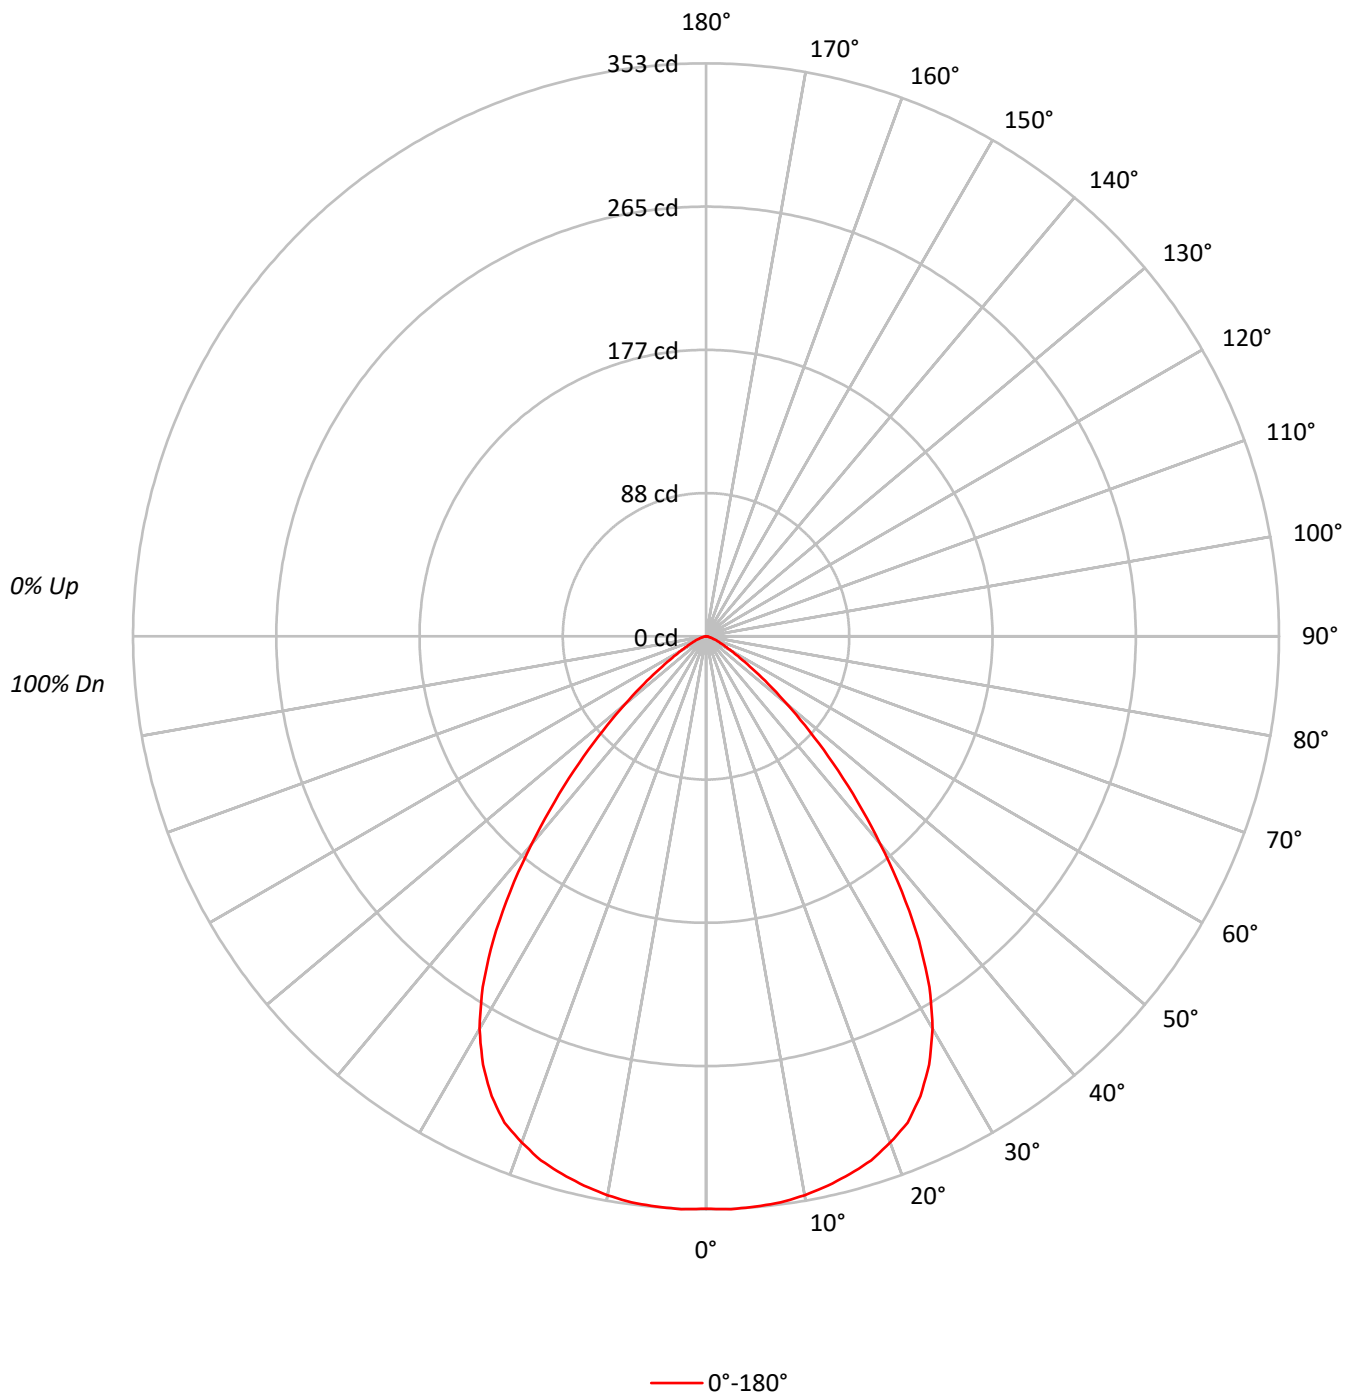



TEST NUMBER: P697070

CATALOG NUMBER: MRI-FEU4C-05-L930 F4X-W-X-H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91		
2	105	100	95	91	103	98	93	90	95	91	88	91	88	86	89	86	84	82		
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76	74		
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67		
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	62	61		
6	81	71	64	58	80	70	63	58	68	62	58	67	61	57	65	61	57	55		
7	76	65	58	53	75	65	58	53	63	57	53	62	56	52	61	56	52	50		
8	72	60	53	49	70	60	53	49	59	53	48	58	52	48	57	52	48	46		
9	67	56	49	45	66	56	49	45	55	49	44	54	48	44	53	48	44	43		
10	64	52	46	41	63	52	46	41	51	45	41	50	45	41	49	44	41	39		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	43318
5°	43484
10°	43612
15°	43613
20°	43379
25°	42361
30°	39593
35°	34285
40°	26782
45°	19216
50°	12481
55°	7475
60°	4374
65°	2820
70°	1868
75°	1424
80°	1061
85°	0



TEST NUMBER: P697070
 CATALOG NUMBER: MRI-FEU4C-05-L930 F4X-W-X-H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	33.6	6.1
10°-20°	96.7	17.7
20°-30°	142.8	26.1
30°-40°	140.9	25.8
40°-50°	86.2	15.8
50°-60°	33.1	6.0
60°-70°	10.3	1.9
70°-80°	3.0	0.6
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	273.1	49.9
0°-40°	414.0	75.7
0°-60°	533.3	97.5
0°-90°	547.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	547.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	353	
5°	353	34
15°	343	97
25°	312	143
35°	229	141
45°	111	86
55°	35	33
65°	10	10
75°	3	3
85°	0	0
90°	0	



TEST NUMBER: P697070

CATALOG NUMBER: MRI-FEU4C-05-L930 F4X-W-X-H

CANDELA DISTRIBUTION (FULL):

0°	
0°	352.6
2.5°	353.3
5°	352.6
7.5°	351.8
10°	349.6
12.5°	346.6
15°	342.9
17.5°	338.5
20°	331.8
22.5°	324.4
25°	312.5
27.5°	297.6
30°	279.1
32.5°	256.1
35°	228.6
37.5°	198.2
40°	167.0
42.5°	138.1
45°	110.6
47.5°	86.1
50°	65.3
52.5°	48.3
55°	34.9
57.5°	24.5
60°	17.8
62.5°	13.4
65°	9.7
67.5°	7.4
70°	5.2
72.5°	3.7
75°	3.0
77.5°	1.5
80°	1.5
82.5°	0.7
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)