

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P309194

Luminaire Tested: **24FCZ2-30-UNV-L82765-HRP-CA125-W2A-U-2700K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P309194
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-20)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-30-UNV-L82765-HRP-CA125-W2A-U-2700K
Description: 2'X4' TROFFER LED MODULE, HIGH EFFICIENCY RND PERF. LENS, 0.125" ACRYLIC SHEET
Light Source: (168) 2700K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1923.0 lumens
Efficiency: N/A
Efficacy: 82.2 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.3 / 1.4
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 23.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P309194

CATALOG NUMBER: 24FCZ2-30-UNV-L82765-HRP-CA125-W2A-U-2700K

Luminous Intensity Polar Plot

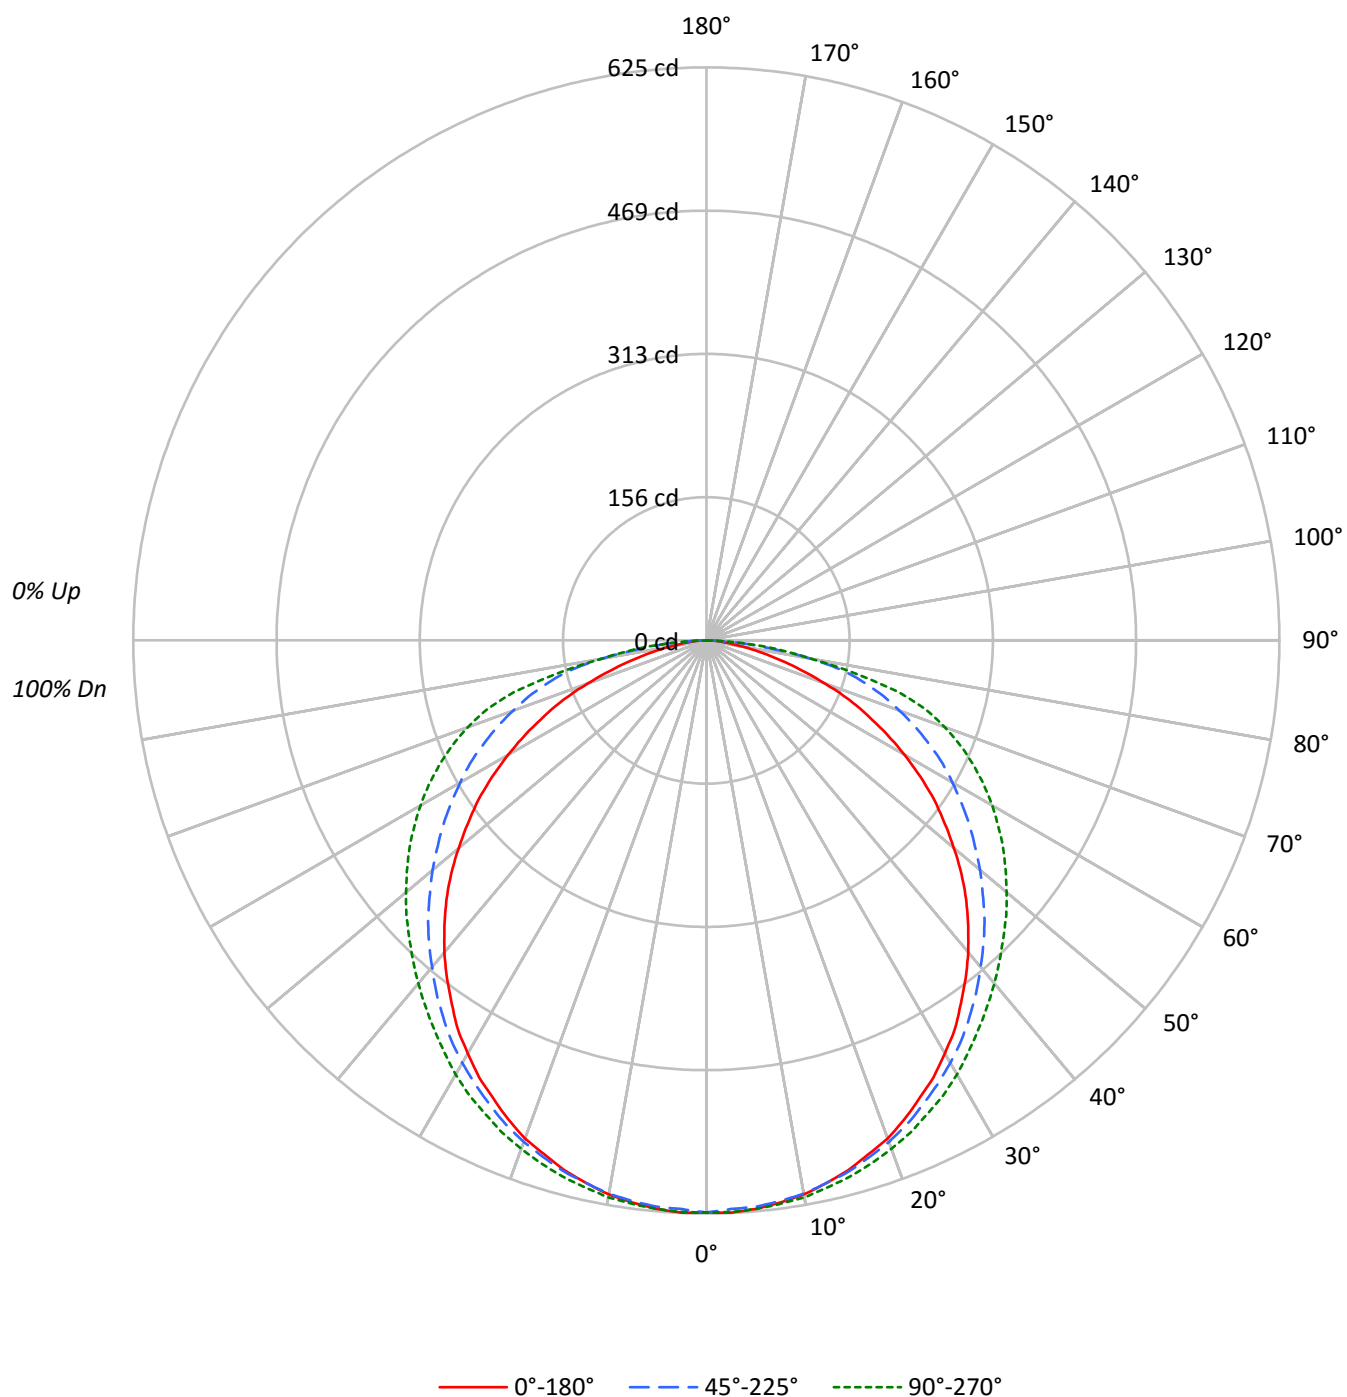



TEST NUMBER: P309194

CATALOG NUMBER: 24FCZ2-30-UNV-L82765-HRP-CA125-W2A-U-2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	108	103	98	94	105	101	96	93	96	93	90		92	90	87		82
2	98	89	82	76	95	87	80	75	83	78	73		80	75	71		67
3	89	78	69	62	86	76	68	62	73	66	61		70	64	59		56
4	81	68	59	52	79	67	59	52	65	57	51		62	56	50		48
5	74	61	52	45	72	60	51	45	58	50	44		56	49	44		41
6	69	55	46	39	67	54	45	39	52	44	38		50	43	38		36
7	63	50	41	34	62	49	40	34	47	39	34		46	39	34		31
8	59	45	36	30	57	44	36	30	43	36	30		42	35	30		28
9	55	41	33	27	54	41	33	27	40	32	27		39	32	27		25
10	52	38	30	25	50	38	30	25	37	30	25		36	29	24		23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	839	839	839
5°	840	837	840
10°	838	837	843
15°	833	835	843
20°	828	833	845
25°	818	829	846
30°	808	827	849
35°	795	822	850
40°	781	817	858
45°	763	816	872
50°	738	816	895
55°	712	821	927
60°	672	834	968
65°	620	854	1023
70°	542	884	1089
75°	439	929	1126
80°	325	910	910
85°	249	672	758



TEST NUMBER: P309194

CATALOG NUMBER: 24FCZ2-30-UNV-L82765-HRP-CA125-W2A-U-2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	59.1	3.1
10°-20°	169.7	8.8
20°-30°	258.4	13.4
30°-40°	313.7	16.3
40°-50°	331.5	17.2
50°-60°	312.8	16.3
60°-70°	260.1	13.5
70°-80°	171.1	8.9
80°-90°	46.6	2.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	487.2	25.3
0°-40°	801.0	41.7
0°-60°	1445.2	75.2
0°-90°	1923.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1923.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	624	624	624	624	624	
5°	622	622	620	622	622	59
15°	598	599	600	605	605	169
25°	551	554	559	568	570	254
35°	484	490	501	514	518	303
45°	401	409	429	450	458	309
55°	304	316	350	383	395	270
65°	195	217	268	308	321	193
75°	84	123	179	212	217	91
85°	16	35	44	48	49	20
90°	0	0	0	0	0	



TEST NUMBER: P309194

CATALOG NUMBER: 24FCZ2-30-UNV-L82765-HRP-CA125-W2A-U-2700K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	623.9	623.9	623.9	623.9	623.9
2.5°	624.7	623.9	620.7	623.9	623.9
5°	622.3	622.3	619.9	622.3	622.3
7.5°	618.3	618.3	616.7	619.9	619.9
10°	613.5	613.5	612.6	616.7	616.7
12.5°	606.2	607.0	606.2	611.0	611.0
15°	598.2	599.0	599.8	605.4	605.4
17.5°	587.7	589.3	590.9	597.4	598.2
20°	578.0	578.8	582.1	589.3	590.1
22.5°	565.1	567.6	571.6	578.8	581.3
25°	550.7	553.9	558.7	568.4	570.0
27.5°	537.0	539.4	545.8	556.3	559.5
30°	520.1	524.1	532.1	542.6	546.6
32.5°	504.0	508.0	517.7	528.9	532.1
35°	483.8	489.5	500.7	513.6	517.7
37.5°	464.5	470.2	483.8	498.3	503.2
40°	444.4	450.8	465.3	482.2	488.7
42.5°	422.7	431.5	447.6	466.1	473.4
45°	400.9	409.0	429.1	450.0	458.1
47.5°	377.6	387.2	409.0	433.9	443.6
50°	352.6	364.7	389.6	417.0	427.5
52.5°	327.7	341.3	369.5	400.1	411.4
55°	303.5	316.4	350.2	383.2	395.3
57.5°	276.9	293.0	330.1	365.5	377.6
60°	249.6	267.3	309.9	347.0	359.9
62.5°	222.2	242.3	290.6	327.7	341.3
65°	194.8	217.4	268.1	307.5	321.2
67.5°	168.3	193.2	247.2	286.6	300.3
70°	137.7	169.1	224.6	263.3	276.9
72.5°	109.5	145.7	202.9	239.1	251.2
75°	84.5	123.2	178.7	211.7	216.6
77.5°	62.0	100.6	153.8	165.0	165.8
80°	41.9	80.5	117.5	115.9	117.5
82.5°	27.4	60.4	74.1	82.9	83.7
85°	16.1	35.4	43.5	48.3	49.1
87.5°	8.1	12.1	15.3	16.1	17.7
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)