

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P309472

Luminaire Tested: **24FCZ2-45-UNV-L82765-HRP-CA125-W2A-U-6500K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P309472
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-20)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-45-UNV-L82765-HRP-CA125-W2A-U-6500K
Description: 2'X4' TROFFER LED MODULE, HIGH EFFICIENCY RND PERF. LENS, 0.125" ACRYLIC SHEET
Light Source: (168) 6500K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3274.0 lumens
Efficiency: N/A
Efficacy: 83.3 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.3 / 1.4
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 39.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P309472

CATALOG NUMBER: 24FCZ2-45-UNV-L82765-HRP-CA125-W2A-U-6500K

Luminous Intensity Polar Plot

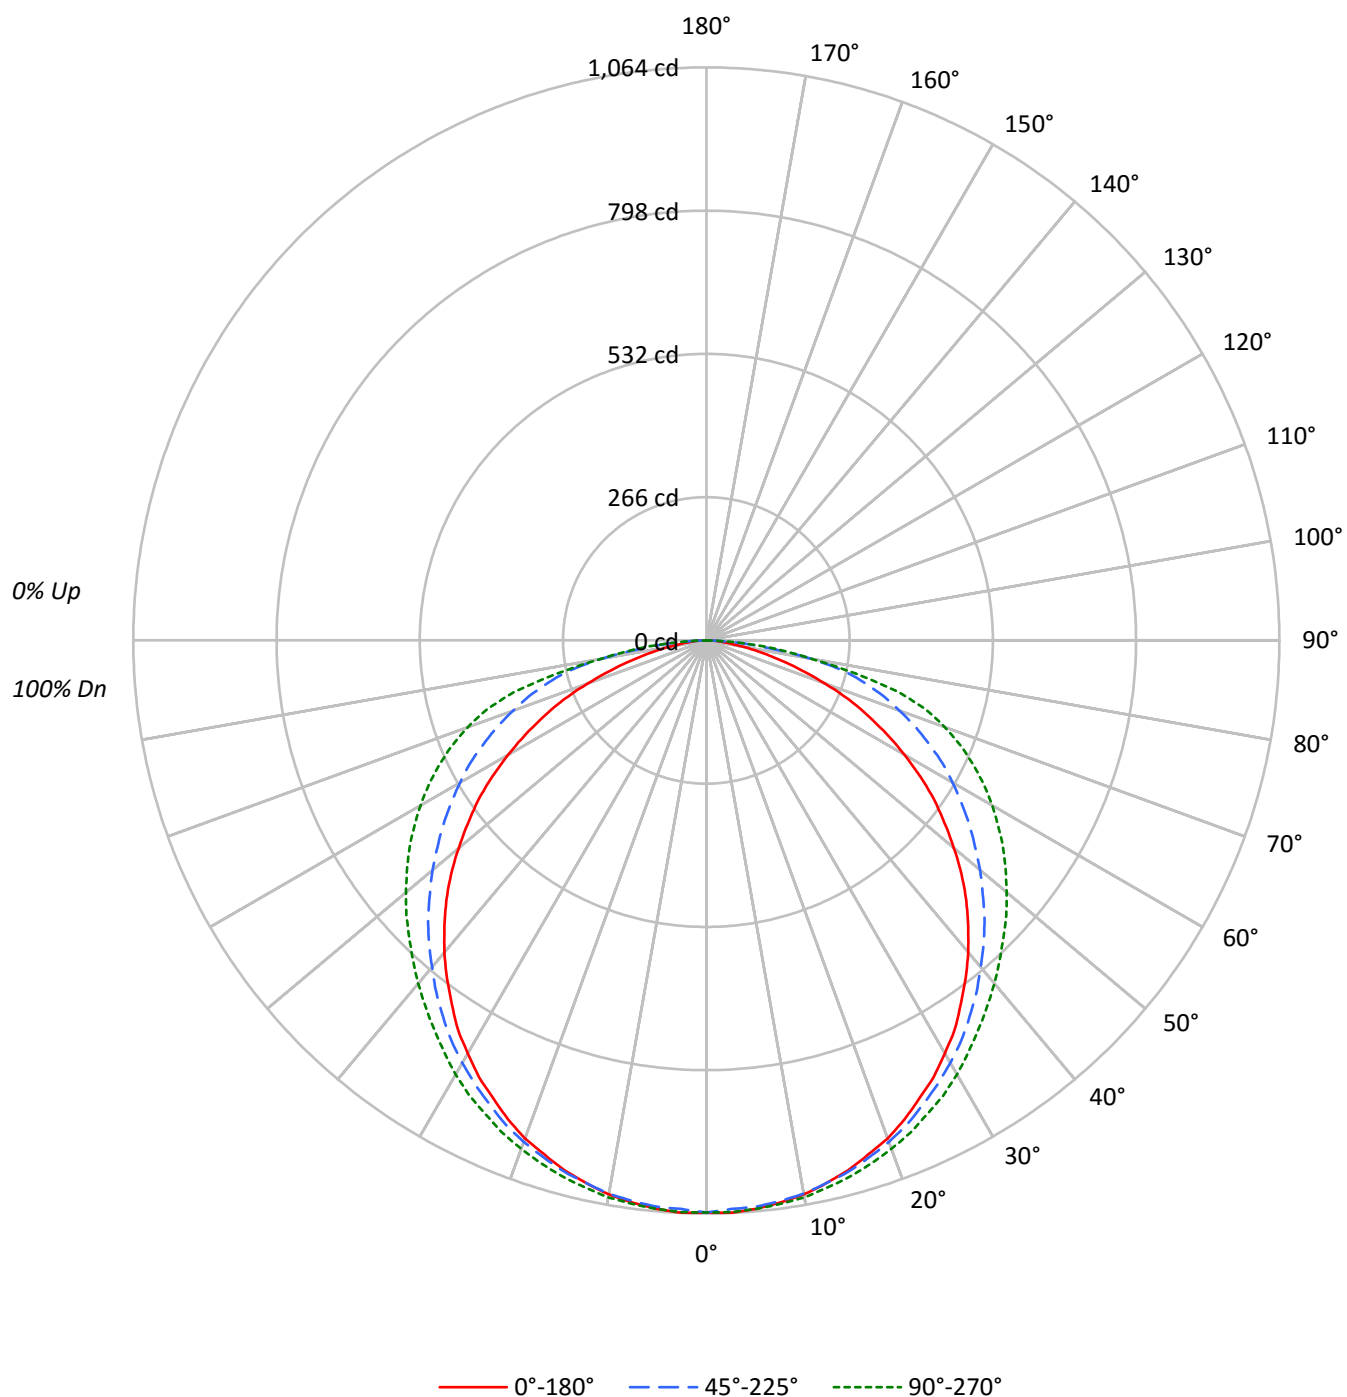



TEST NUMBER: P309472

CATALOG NUMBER: 24FCZ2-45-UNV-L82765-HRP-CA125-W2A-U-6500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	108	103	98	94	105	101	96	93	96	93	90		92	90	87		82
2	98	89	82	76	95	87	80	75	83	78	73		80	75	71		67
3	89	78	69	62	86	76	68	62	73	66	61		70	64	59		56
4	81	68	59	52	79	67	59	52	65	57	51		62	56	50		48
5	74	61	52	45	72	60	51	45	58	50	44		56	49	44		41
6	69	55	46	39	67	54	45	39	52	44	38		50	43	38		36
7	63	50	41	34	62	49	40	34	47	39	34		46	39	34		31
8	59	45	36	30	57	44	36	30	43	36	30		42	35	30		28
9	55	41	33	27	54	41	33	27	40	32	27		39	32	27		25
10	52	38	30	25	50	38	30	25	37	30	25		36	29	24		23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1429	1429	1429
5°	1431	1425	1431
10°	1427	1425	1434
15°	1419	1422	1436
20°	1409	1419	1439
25°	1392	1412	1441
30°	1376	1408	1446
35°	1353	1400	1448
40°	1329	1391	1461
45°	1299	1390	1484
50°	1257	1389	1523
55°	1212	1399	1579
60°	1143	1420	1649
65°	1056	1453	1741
70°	922	1504	1855
75°	748	1582	1917
80°	552	1550	1550
85°	423	1142	1291



TEST NUMBER: P309472

CATALOG NUMBER: 24FCZ2-45-UNV-L82765-HRP-CA125-W2A-U-6500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	100.6	3.1
10°-20°	289.0	8.8
20°-30°	439.9	13.4
30°-40°	534.2	16.3
40°-50°	564.3	17.2
50°-60°	532.5	16.3
60°-70°	442.8	13.5
70°-80°	291.3	8.9
80°-90°	79.4	2.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	829.5	25.3
0°-40°	1363.7	41.7
0°-60°	2460.5	75.2
0°-90°	3274.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3274.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1062	1062	1062	1062	1062	
5°	1060	1060	1055	1060	1060	101
15°	1018	1020	1021	1031	1031	287
25°	938	943	951	968	970	432
35°	824	833	852	874	881	516
45°	683	696	731	766	780	526
55°	517	539	596	652	673	460
65°	332	370	456	524	547	328
75°	144	210	304	360	369	155
85°	27	60	74	82	84	34
90°	0	0	0	0	0	



TEST NUMBER: P309472

CATALOG NUMBER: 24FCZ2-45-UNV-L82765-HRP-CA125-W2A-U-6500K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1062.3	1062.3	1062.3	1062.3	1062.3
2.5°	1063.6	1062.3	1056.8	1062.3	1062.3
5°	1059.5	1059.5	1055.4	1059.5	1059.5
7.5°	1052.7	1052.7	1049.9	1055.4	1055.4
10°	1044.4	1044.4	1043.1	1049.9	1049.9
12.5°	1032.1	1033.5	1032.1	1040.3	1040.3
15°	1018.4	1019.8	1021.1	1030.7	1030.7
17.5°	1000.6	1003.3	1006.1	1017.0	1018.4
20°	984.1	985.5	991.0	1003.3	1004.7
22.5°	962.2	966.3	973.2	985.5	989.6
25°	937.5	943.0	951.2	967.7	970.4
27.5°	914.2	918.3	929.3	947.1	952.6
30°	885.4	892.3	906.0	923.8	930.7
32.5°	858.0	864.9	881.3	900.5	906.0
35°	823.8	833.4	852.5	874.5	881.3
37.5°	790.9	800.5	823.8	848.4	856.7
40°	756.6	767.6	792.2	821.0	832.0
42.5°	719.6	734.7	762.1	793.6	805.9
45°	682.6	696.3	730.6	766.2	779.9
47.5°	642.8	659.3	696.3	738.8	755.2
50°	600.3	620.9	663.4	710.0	727.8
52.5°	557.9	581.2	629.1	681.2	700.4
55°	516.7	538.7	596.2	652.4	673.0
57.5°	471.5	498.9	562.0	622.3	642.8
60°	424.9	455.1	527.7	590.7	612.7
62.5°	378.3	412.6	494.8	557.9	581.2
65°	331.7	370.1	456.4	523.6	546.9
67.5°	286.5	329.0	420.8	488.0	511.3
70°	234.4	287.8	382.4	448.2	471.5
72.5°	186.4	248.1	345.4	407.1	427.6
75°	143.9	209.7	304.3	360.5	368.7
77.5°	105.5	171.3	261.8	281.0	282.4
80°	71.3	137.1	200.1	197.4	200.1
82.5°	46.6	102.8	126.1	141.2	142.5
85°	27.4	60.3	74.0	82.2	83.6
87.5°	13.7	20.6	26.0	27.4	30.2
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)