

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P309497

Luminaire Tested: **24FCZ2-45-UNV-L82765-HRP-CP250-W2A-U-5500K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P309497
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-20)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-45-UNV-L82765-HRP-CP250-W2A-U-5500K
Description: 2'X4' TROFFER LED MODULE, HIGH EFFICIENCY RND PERF. LENS, 0.250"
POLYCARB SHEET
Light Source: (168) 5500K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3034.0 lumens
Efficiency: N/A
Efficacy: 78.4 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.3 / 1.4
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 38.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P309497

CATALOG NUMBER: 24FCZ2-45-UNV-L82765-HRP-CP250-W2A-U-5500K

Luminous Intensity Polar Plot

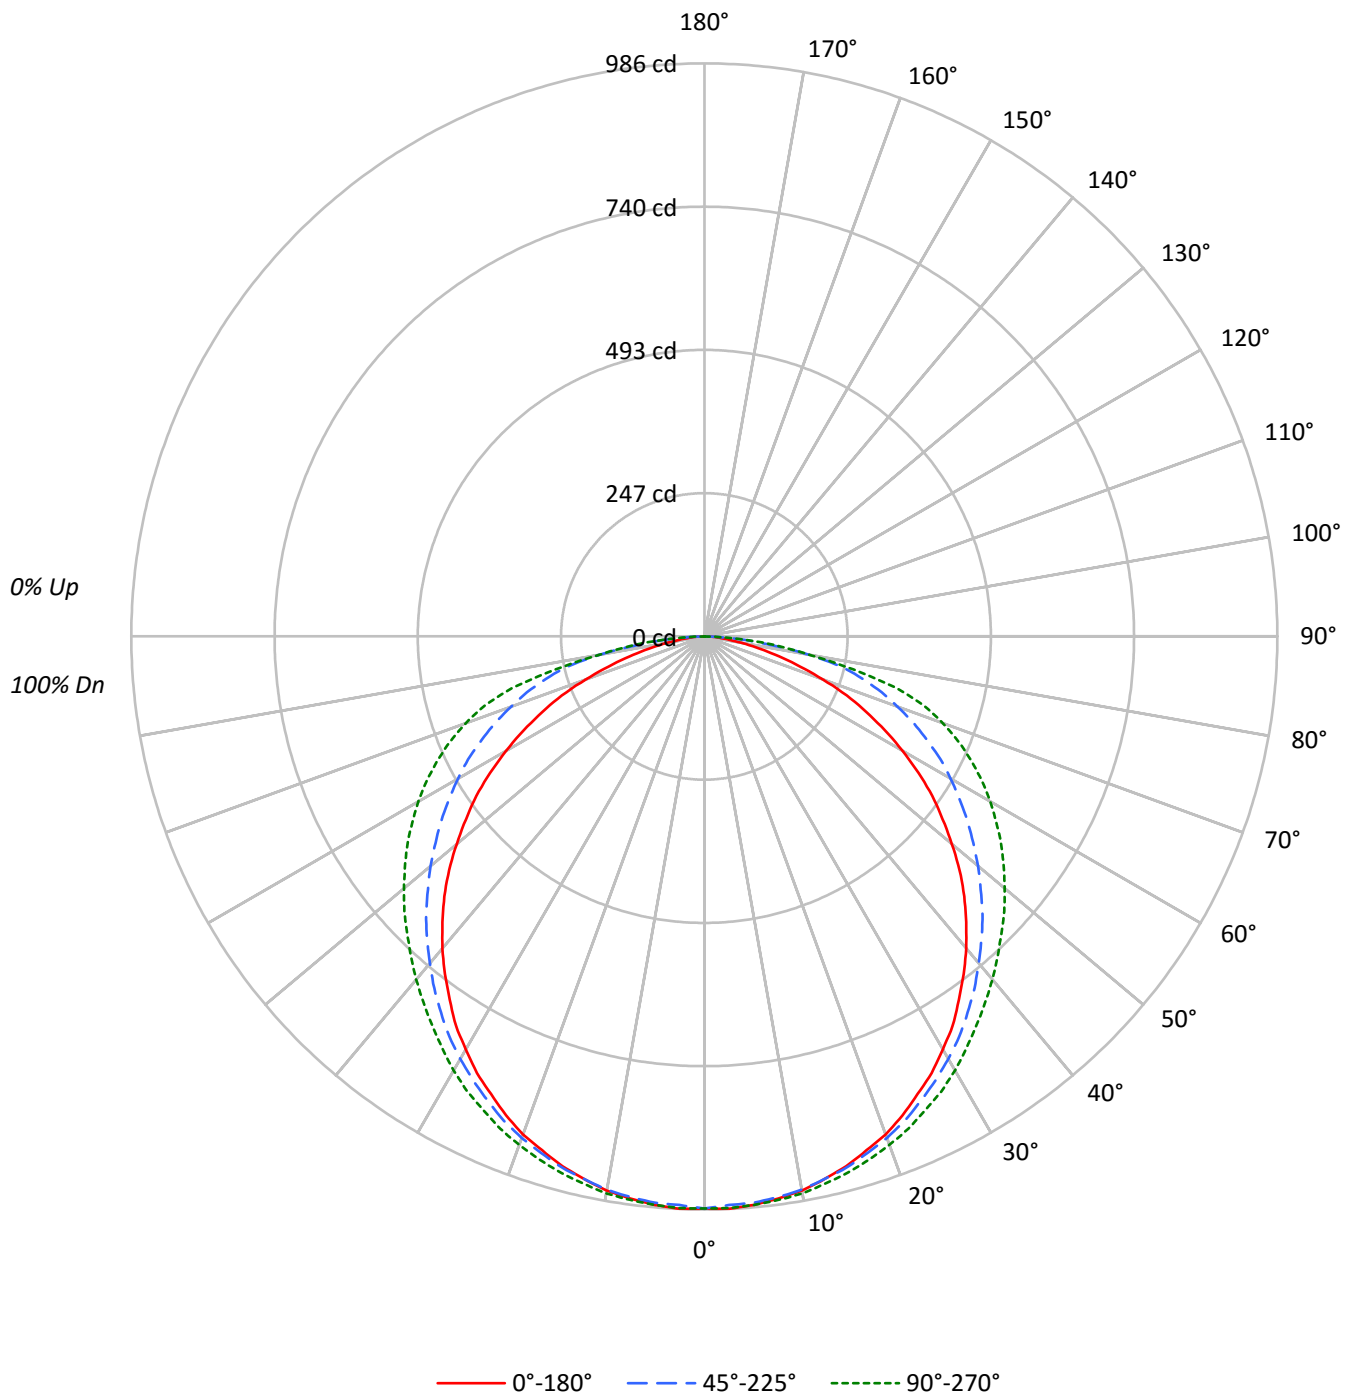



TEST NUMBER: P309497

CATALOG NUMBER: 24FCZ2-45-UNV-L82765-HRP-CP250-W2A-U-5500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	108	103	98	94	105	101	96	93	96	93	90		92	90	87		82
2	98	89	82	76	95	87	80	75	83	78	73		80	75	71		67
3	89	78	69	62	86	76	68	62	73	66	61		70	64	59		56
4	81	68	59	52	79	67	59	52	65	57	51		62	56	50		48
5	74	61	52	45	72	60	51	45	58	50	44		56	49	44		41
6	69	55	46	39	67	54	45	39	52	44	38		50	43	38		36
7	63	50	41	34	62	49	40	34	47	39	34		46	39	34		31
8	59	45	36	30	57	44	36	30	43	36	30		42	35	30		28
9	55	41	33	27	54	41	33	27	40	32	27		39	32	27		25
10	52	38	30	25	50	38	30	25	37	30	25		36	29	24		23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1324	1324	1324
5°	1326	1321	1326
10°	1322	1321	1329
15°	1315	1318	1331
20°	1306	1315	1333
25°	1290	1309	1335
30°	1275	1304	1340
35°	1254	1298	1341
40°	1231	1290	1354
45°	1204	1288	1375
50°	1164	1287	1412
55°	1123	1296	1463
60°	1060	1316	1528
65°	979	1347	1613
70°	854	1394	1719
75°	693	1466	1776
80°	511	1437	1437
85°	392	1059	1196



TEST NUMBER: P309497

CATALOG NUMBER: 24FCZ2-45-UNV-L82765-HRP-CP250-W2A-U-5500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	93.3	3.1
10°-20°	267.8	8.8
20°-30°	407.7	13.4
30°-40°	495.0	16.3
40°-50°	523.0	17.2
50°-60°	493.5	16.3
60°-70°	410.3	13.5
70°-80°	269.9	8.9
80°-90°	73.6	2.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	768.7	25.3
0°-40°	1263.7	41.7
0°-60°	2280.2	75.2
0°-90°	3034.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3034.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	984	984	984	984	984	
5°	982	982	978	982	982	93
15°	944	945	946	955	955	266
25°	869	874	882	897	899	401
35°	763	772	790	810	817	478
45°	632	645	677	710	723	487
55°	479	499	552	605	624	427
65°	307	343	423	485	507	304
75°	133	194	282	334	342	144
85°	25	56	69	76	78	31
90°	0	0	0	0	0	



TEST NUMBER: P309497

CATALOG NUMBER: 24FCZ2-45-UNV-L82765-HRP-CP250-W2A-U-5500K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	984.4	984.4	984.4	984.4	984.4
2.5°	985.7	984.4	979.3	984.4	984.4
5°	981.8	981.8	978.0	981.8	981.8
7.5°	975.5	975.5	973.0	978.0	978.0
10°	967.9	967.9	966.6	973.0	973.0
12.5°	956.4	957.7	956.4	964.1	964.1
15°	943.7	945.0	946.3	955.2	955.2
17.5°	927.2	929.8	932.3	942.5	943.7
20°	912.0	913.3	918.3	929.8	931.0
22.5°	891.7	895.5	901.8	913.3	917.1
25°	868.8	873.9	881.5	896.7	899.3
27.5°	847.2	851.0	861.2	877.7	882.8
30°	820.5	826.9	839.6	856.1	862.4
32.5°	795.1	801.5	816.7	834.5	839.6
35°	763.4	772.3	790.0	810.4	816.7
37.5°	732.9	741.8	763.4	786.2	793.9
40°	701.1	711.3	734.2	760.8	771.0
42.5°	666.8	680.8	706.2	735.4	746.9
45°	632.5	645.2	677.0	710.0	722.7
47.5°	595.7	611.0	645.2	684.6	699.9
50°	556.3	575.4	614.8	657.9	674.5
52.5°	517.0	538.6	583.0	631.3	649.1
55°	478.9	499.2	552.5	604.6	623.7
57.5°	436.9	462.3	520.8	576.7	595.7
60°	393.8	421.7	489.0	547.4	567.8
62.5°	350.6	382.3	458.5	517.0	538.6
65°	307.4	342.9	423.0	485.2	506.8
67.5°	265.5	304.8	389.9	452.2	473.8
70°	217.2	266.7	354.4	415.3	436.9
72.5°	172.7	229.9	320.1	377.2	396.3
75°	133.4	194.3	282.0	334.1	341.7
77.5°	97.8	158.8	242.6	260.4	261.7
80°	66.0	127.0	185.4	182.9	185.4
82.5°	43.2	95.3	116.9	130.8	132.1
85°	25.4	55.9	68.6	76.2	77.5
87.5°	12.7	19.1	24.1	25.4	27.9
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)