

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P309625

Luminaire Tested: **24FCZ2-55HE-UNV-L82765-HRP-CP187-W2A-U-6500K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P309625
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-20)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-55HE-UNV-L82765-HRP-CP187-W2A-U-6500K
Description: 2'X4' TROFFER LED MODULE, HIGH EFFICIENCY RND PERF. LENS, 0.187"
POLYCARB SHEET
Light Source: (336) 6500K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3765.0 lumens
Efficiency: N/A
Efficacy: 83.7 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.3 / 1.4
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 45
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P309625

CATALOG NUMBER: 24FCZ2-55HE-UNV-L82765-HRP-CP187-W2A-U-6500K

Luminous Intensity Polar Plot

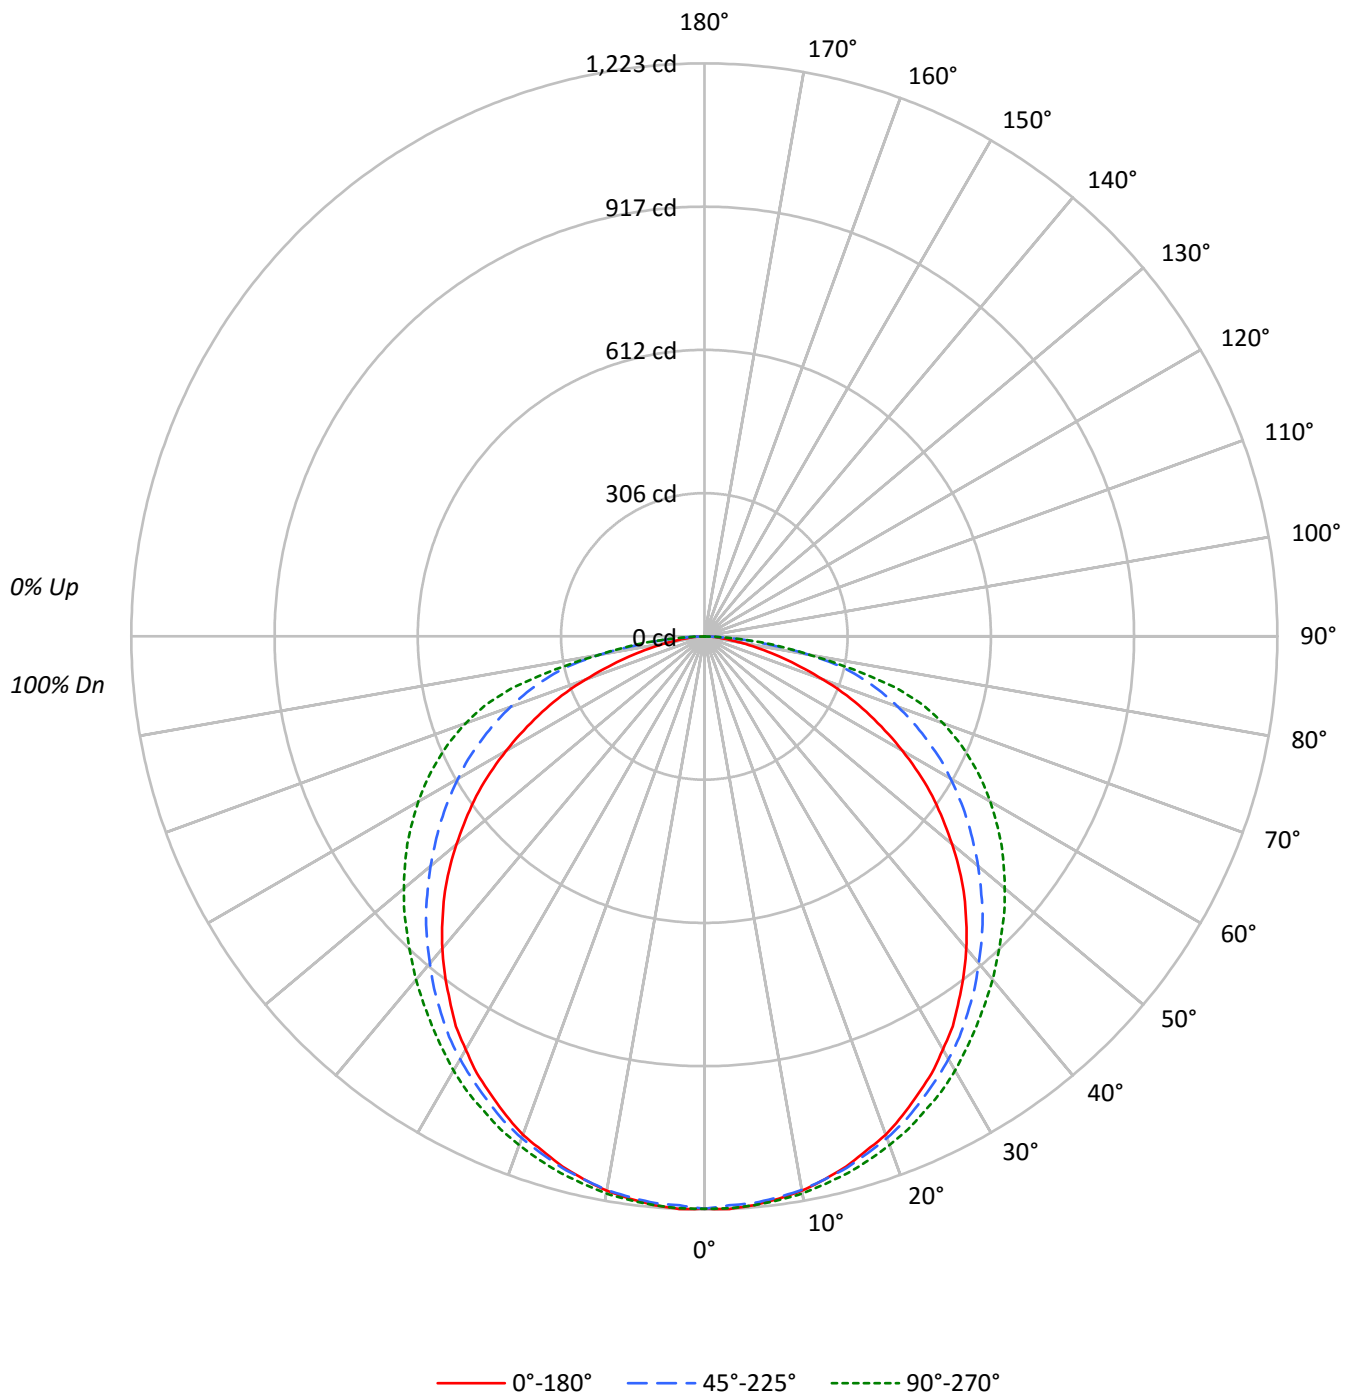



TEST NUMBER: P309625

CATALOG NUMBER: 24FCZ2-55HE-UNV-L82765-HRP-CP187-W2A-U-6500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	108	103	98	94	105	101	96	93	96	93	90		92	90	87		82
2	98	89	82	76	95	87	80	75	83	78	73		80	75	71		67
3	89	78	69	62	86	76	68	62	73	66	61		70	64	59		56
4	81	68	59	52	79	67	59	52	65	57	51		62	56	50		48
5	74	61	52	45	72	60	51	45	58	50	44		56	49	44		41
6	69	55	46	39	67	54	45	39	52	44	38		50	43	38		36
7	63	50	41	34	62	49	40	34	47	39	34		46	39	34		31
8	59	45	36	30	57	44	36	30	43	36	30		42	35	30		28
9	55	41	33	27	54	41	33	27	40	32	27		39	32	27		25
10	52	38	30	25	50	38	30	25	37	30	25		36	29	24		23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1644	1644	1644
5°	1646	1639	1646
10°	1641	1639	1650
15°	1631	1636	1651
20°	1620	1632	1654
25°	1601	1624	1657
30°	1582	1619	1663
35°	1556	1610	1665
40°	1528	1600	1681
45°	1494	1599	1707
50°	1445	1597	1752
55°	1394	1608	1815
60°	1315	1633	1896
65°	1214	1671	2002
70°	1060	1730	2133
75°	860	1819	2204
80°	635	1783	1783
85°	486	1314	1484



TEST NUMBER: P309625

CATALOG NUMBER: 24FCZ2-55HE-UNV-L82765-HRP-CP187-W2A-U-6500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	115.7	3.1
10°-20°	332.3	8.8
20°-30°	505.9	13.4
30°-40°	614.3	16.3
40°-50°	649.0	17.2
50°-60°	612.4	16.3
60°-70°	509.2	13.5
70°-80°	335.0	8.9
80°-90°	91.3	2.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	953.9	25.3
0°-40°	1568.2	41.7
0°-60°	2829.5	75.2
0°-90°	3765.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3765.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1222	1222	1222	1222	1222	
5°	1218	1218	1214	1218	1218	116
15°	1171	1173	1174	1185	1185	330
25°	1078	1084	1094	1113	1116	497
35°	947	958	980	1006	1014	593
45°	785	801	840	881	897	604
55°	594	619	686	750	774	529
65°	381	426	525	602	629	377
75°	166	241	350	414	424	178
85°	32	69	85	95	96	39
90°	0	0	0	0	0	



TEST NUMBER: P309625

CATALOG NUMBER: 24FCZ2-55HE-UNV-L82765-HRP-CP187-W2A-U-6500K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1221.6	1221.6	1221.6	1221.6	1221.6
2.5°	1223.1	1221.6	1215.3	1221.6	1221.6
5°	1218.4	1218.4	1213.7	1218.4	1218.4
7.5°	1210.5	1210.5	1207.4	1213.7	1213.7
10°	1201.1	1201.1	1199.5	1207.4	1207.4
12.5°	1186.9	1188.5	1186.9	1196.3	1196.3
15°	1171.1	1172.7	1174.3	1185.3	1185.3
17.5°	1150.6	1153.8	1156.9	1169.5	1171.1
20°	1131.7	1133.3	1139.6	1153.8	1155.4
22.5°	1106.5	1111.2	1119.1	1133.3	1138.0
25°	1078.1	1084.4	1093.9	1112.8	1116.0
27.5°	1051.3	1056.1	1068.7	1089.2	1095.5
30°	1018.2	1026.1	1041.9	1062.4	1070.2
32.5°	986.7	994.6	1013.5	1035.6	1041.9
35°	947.3	958.3	980.4	1005.6	1013.5
37.5°	909.5	920.5	947.3	975.7	985.1
40°	870.1	882.7	911.0	944.1	956.8
42.5°	827.5	844.8	876.4	912.6	926.8
45°	784.9	800.7	840.1	881.1	896.9
47.5°	739.2	758.2	800.7	849.6	868.5
50°	690.4	714.0	762.9	816.5	837.0
52.5°	641.5	668.3	723.5	783.4	805.4
55°	594.2	619.4	685.6	750.3	773.9
57.5°	542.2	573.7	646.2	715.6	739.2
60°	488.6	523.3	606.8	679.3	704.6
62.5°	435.0	474.4	569.0	641.5	668.3
65°	381.4	425.6	524.9	602.1	628.9
67.5°	329.4	378.3	483.9	561.1	587.9
70°	269.5	331.0	439.8	515.4	542.2
72.5°	214.4	285.3	397.2	468.1	491.8
75°	165.5	241.2	349.9	414.5	424.0
77.5°	121.4	197.0	301.1	323.1	324.7
80°	82.0	157.6	230.1	227.0	230.1
82.5°	53.6	118.2	145.0	162.3	163.9
85°	31.5	69.4	85.1	94.6	96.1
87.5°	15.8	23.6	29.9	31.5	34.7
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)