

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P310016

Luminaire Tested: **24FCZ2-40HE-UNV-L82765-RDP-CP125-W2A-U-4000K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P310016
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-19)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-40HE-UNV-L82765-RDP-CP125-W2A-U-4000K
Description: 2'X4' TROFFER LED MODULE, SMOOTH LENS WITH INSERT, 0.125" POLYCARB SHEET
Light Source: (336) 4000K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2443.0 lumens
Efficiency: N/A
Efficacy: 79.3 lumens/watt
Spacing Criteria (0/90/45): 1.26 / 1.3 / 1.41
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 30.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P310016

CATALOG NUMBER: 24FCZ2-40HE-UNV-L82765-RDP-CP125-W2A-U-4000K

Luminous Intensity Polar Plot

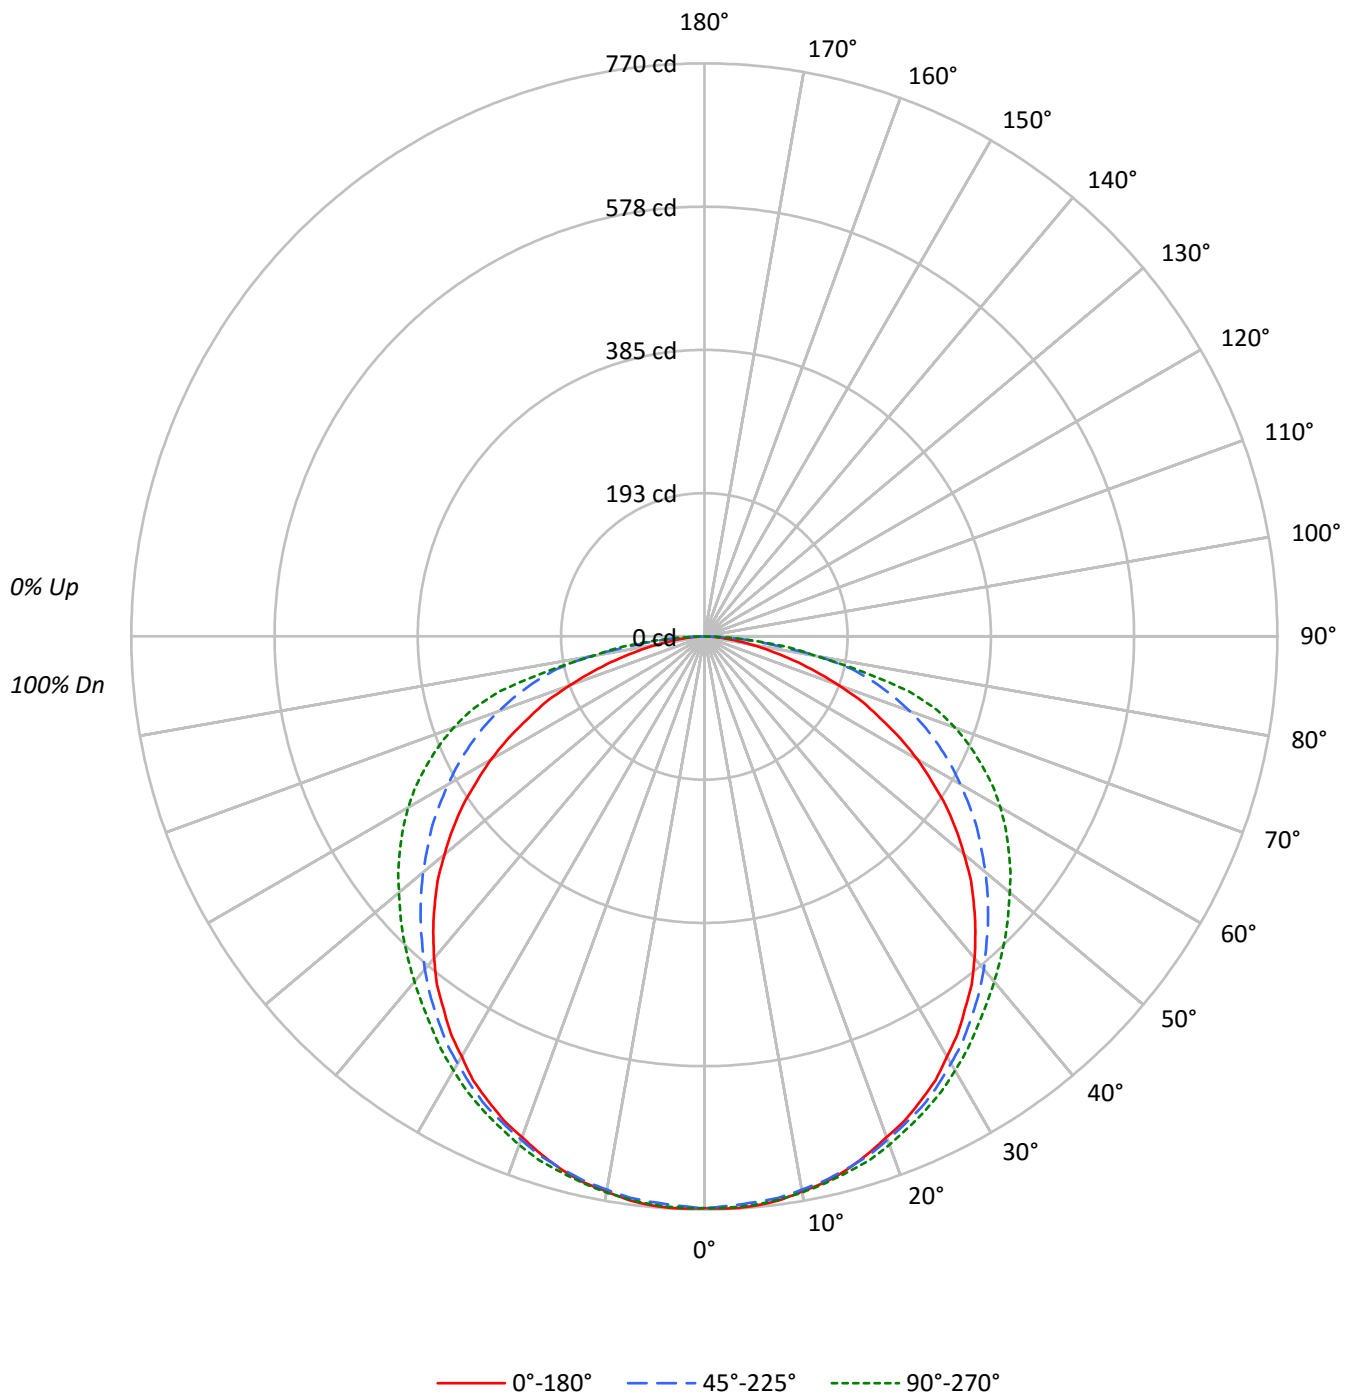



TEST NUMBER: P310016

CATALOG NUMBER: 24FCZ2-40HE-UNV-L82765-RDP-CP125-W2A-U-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	108	103	98	94	105	100	96	92	96	93	89		92	89	87		82
2	97	89	81	75	95	87	80	74	83	77	72		80	75	71		67
3	88	77	68	62	86	76	67	61	72	66	60		70	64	59		56
4	81	68	59	52	78	67	58	51	64	57	51		62	55	50		47
5	74	60	51	44	72	59	51	44	57	49	43		55	48	43		40
6	68	54	45	38	66	53	45	38	51	44	38		50	43	37		35
7	63	49	40	34	61	48	40	34	47	39	33		45	38	33		31
8	59	45	36	30	57	44	36	30	43	35	30		41	34	29		27
9	55	41	33	27	53	40	32	27	39	32	27		38	31	26		24
10	51	38	30	24	50	37	29	24	36	29	24		35	29	24		22

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1034	1034	1034
5°	1038	1031	1036
10°	1035	1031	1036
15°	1033	1031	1038
20°	1025	1031	1041
25°	1022	1033	1043
30°	1013	1030	1047
35°	1003	1027	1051
40°	992	1026	1064
45°	975	1026	1088
50°	954	1032	1121
55°	929	1049	1171
60°	890	1070	1236
65°	833	1107	1312
70°	758	1159	1411
75°	643	1222	1474
80°	507	1230	1192
85°	374	936	1048



TEST NUMBER: P310016

CATALOG NUMBER: 24FCZ2-40HE-UNV-L82765-RDP-CP125-W2A-U-4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.9	3.0
10°-20°	209.7	8.6
20°-30°	320.7	13.1
30°-40°	392.1	16.0
40°-50°	417.9	17.1
50°-60°	399.6	16.4
60°-70°	338.5	13.9
70°-80°	227.5	9.3
80°-90°	64.2	2.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	603.3	24.7
0°-40°	995.4	40.7
0°-60°	1812.9	74.2
0°-90°	2443.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2443.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	768	768	768	768	768	
5°	768	767	763	767	767	73
15°	742	742	740	746	745	209
25°	688	691	696	702	703	317
35°	611	616	625	637	640	383
45°	513	521	539	562	572	395
55°	396	411	447	482	499	353
65°	262	288	348	394	412	260
75°	124	168	235	275	284	132
85°	24	50	61	65	68	30
90°	0	0	0	0	0	



TEST NUMBER: P310016

CATALOG NUMBER: 24FCZ2-40HE-UNV-L82765-RDP-CP125-W2A-U-4000K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	768.3	768.3	768.3	768.3	768.3
2.5°	769.5	769.5	765.8	768.3	768.3
5°	768.3	767.0	763.4	767.0	767.0
7.5°	764.6	763.4	761.0	764.6	763.4
10°	757.3	757.3	754.9	758.6	758.6
12.5°	751.3	750.1	748.9	753.7	752.5
15°	741.6	741.6	740.4	746.4	745.2
17.5°	729.5	730.7	731.9	736.7	738.0
20°	716.1	718.6	719.8	727.1	727.1
22.5°	704.0	705.2	707.7	714.9	714.9
25°	688.3	690.7	695.5	701.6	702.8
27.5°	672.5	673.7	679.8	688.3	689.5
30°	651.9	655.6	662.8	672.5	673.7
32.5°	633.7	637.4	645.9	655.6	658.0
35°	610.7	615.6	625.3	637.4	639.8
37.5°	590.1	593.8	605.9	619.2	622.8
40°	564.7	571.9	584.1	599.8	605.9
42.5°	539.2	546.5	561.0	581.6	588.9
45°	512.6	521.1	539.2	562.3	571.9
47.5°	485.9	495.6	516.2	542.9	553.8
50°	455.6	467.7	493.2	523.5	535.6
52.5°	426.5	441.1	468.9	502.9	518.6
55°	396.2	410.8	447.1	482.3	499.2
57.5°	362.3	381.7	421.7	461.7	479.9
60°	330.8	349.0	397.5	441.1	459.3
62.5°	296.9	321.1	373.2	419.3	437.4
65°	261.7	288.4	347.8	393.8	412.0
67.5°	230.2	259.3	322.3	368.4	386.6
70°	192.7	229.0	294.5	340.5	358.7
72.5°	157.5	197.5	265.4	310.2	327.2
75°	123.6	168.4	235.1	275.1	283.6
77.5°	92.1	139.4	203.6	220.5	214.5
80°	65.4	111.5	158.7	150.3	153.9
82.5°	42.4	84.8	98.2	111.5	115.1
85°	24.2	49.7	60.6	65.4	67.9
87.5°	10.9	18.2	24.2	24.2	23.0
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)