

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P310380

Luminaire Tested: **24FCZ2-65HE-UNV-L82765-RDP-CP125-W2A-U-5700K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P310380
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-19)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-65HE-UNV-L82765-RDP-CP125-W2A-U-5700K
Description: 2'X4' TROFFER LED MODULE, SMOOTH LENS WITH INSERT, 0.125" POLYCARB SHEET
Light Source: (336) 5700K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4094.0 lumens
Efficiency: N/A
Efficacy: 75.7 lumens/watt
Spacing Criteria (0/90/45): 1.26 / 1.3 / 1.41
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 54.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P310380

CATALOG NUMBER: 24FCZ2-65HE-UNV-L82765-RDP-CP125-W2A-U-5700K

Luminous Intensity Polar Plot

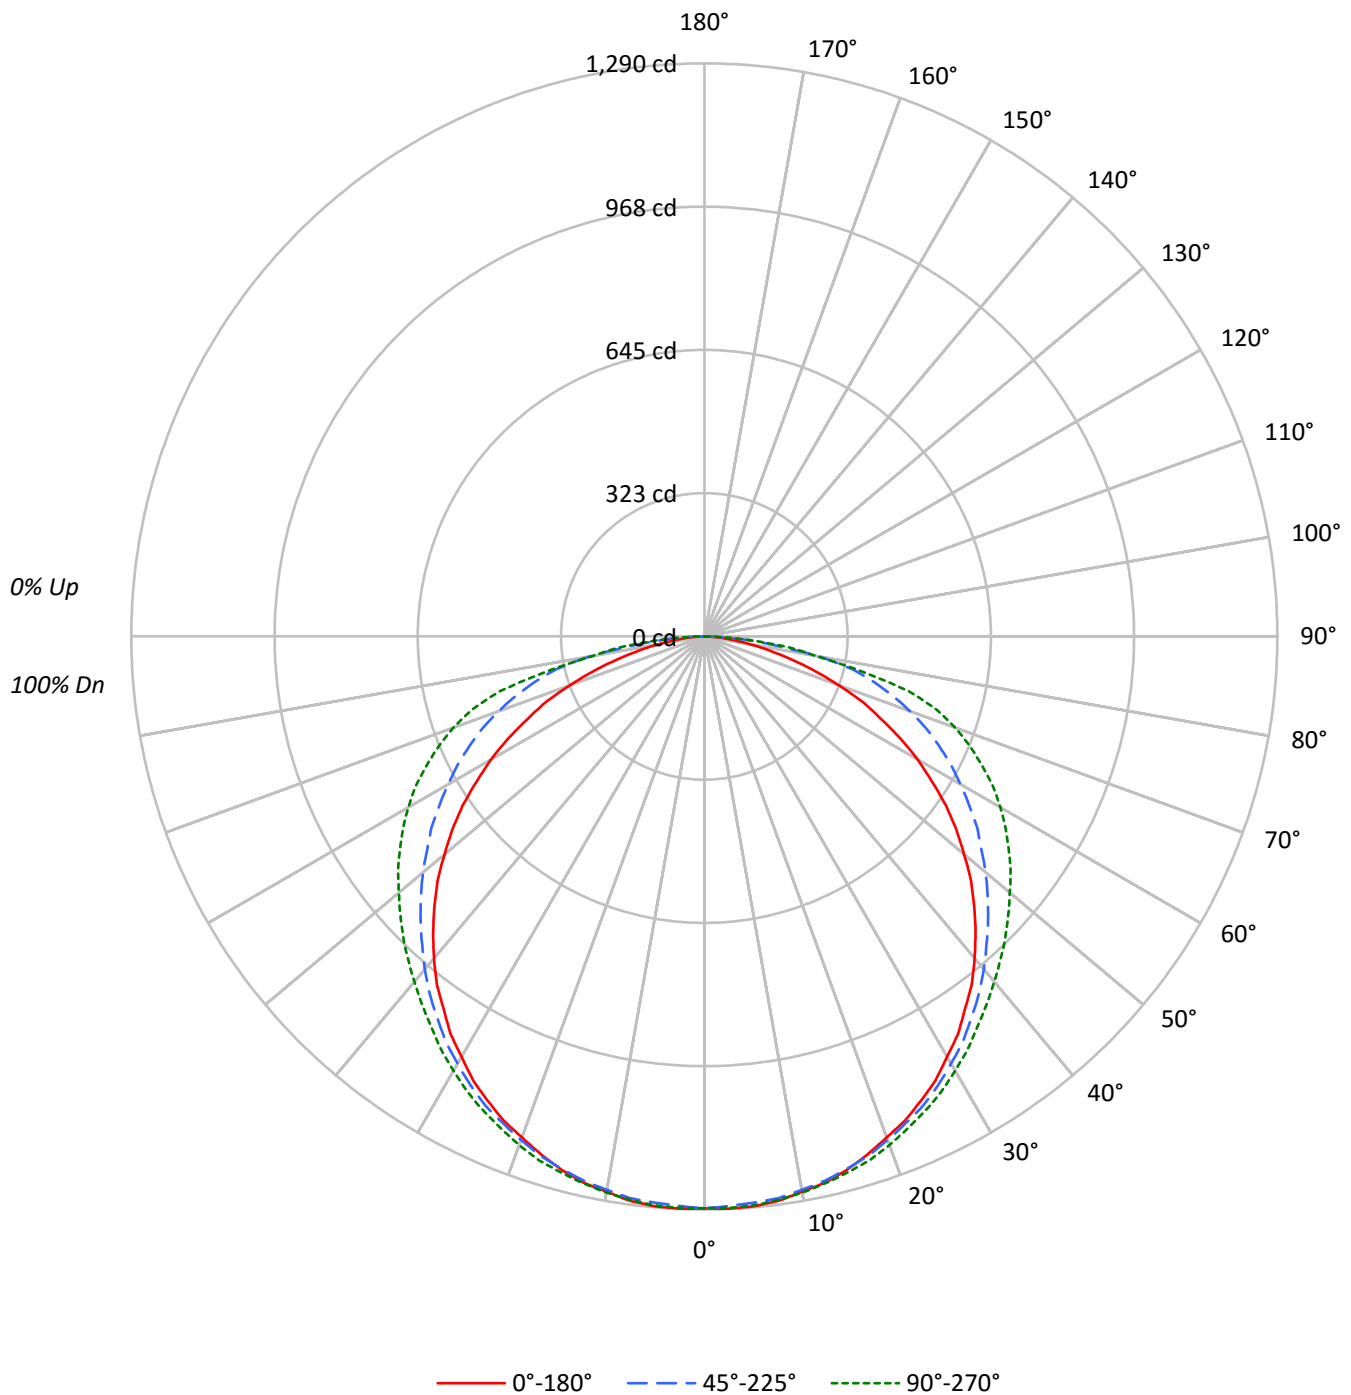



TEST NUMBER: P310380

CATALOG NUMBER: 24FCZ2-65HE-UNV-L82765-RDP-CP125-W2A-U-5700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	108	103	98	94	105	100	96	92	96	93	89	92	89	87	88	86	84	82		
2	97	89	81	75	95	87	80	74	83	77	72	80	75	71	77	73	69	67		
3	88	77	68	62	86	76	67	61	72	66	60	70	64	59	67	62	58	56		
4	81	68	59	52	78	67	58	51	64	57	51	62	55	50	59	54	49	47		
5	74	60	51	44	72	59	51	44	57	49	43	55	48	43	53	47	42	40		
6	68	54	45	38	66	53	45	38	51	44	38	50	43	37	48	42	37	35		
7	63	49	40	34	61	48	40	34	47	39	33	45	38	33	44	38	33	31		
8	59	45	36	30	57	44	36	30	43	35	30	41	34	29	40	34	29	27		
9	55	41	33	27	53	40	32	27	39	32	27	38	31	26	37	31	26	24		
10	51	38	30	24	50	37	29	24	36	29	24	35	29	24	34	28	24	22		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1732	1732	1732
5°	1739	1728	1736
10°	1734	1728	1737
15°	1731	1728	1740
20°	1718	1727	1745
25°	1712	1730	1749
30°	1697	1726	1754
35°	1681	1721	1761
40°	1662	1719	1783
45°	1635	1719	1824
50°	1598	1730	1879
55°	1558	1758	1962
60°	1492	1792	2071
65°	1396	1855	2198
70°	1270	1941	2365
75°	1077	2048	2470
80°	850	2061	1998
85°	627	1567	1755



TEST NUMBER: P310380

CATALOG NUMBER: 24FCZ2-65HE-UNV-L82765-RDP-CP125-W2A-U-5700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.1	3.0
10°-20°	351.5	8.6
20°-30°	537.5	13.1
30°-40°	657.1	16.0
40°-50°	700.3	17.1
50°-60°	669.6	16.4
60°-70°	567.2	13.9
70°-80°	381.2	9.3
80°-90°	107.5	2.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1011.1	24.7
0°-40°	1668.2	40.7
0°-60°	3038.0	74.2
0°-90°	4094.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4094.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1287	1287	1287	1287	1287	
5°	1287	1285	1279	1285	1285	122
15°	1243	1243	1241	1251	1249	350
25°	1153	1158	1166	1176	1178	532
35°	1024	1032	1048	1068	1072	641
45°	859	873	904	942	958	663
55°	664	688	749	808	837	591
65°	439	483	583	660	690	435
75°	207	282	394	461	475	222
85°	41	83	102	110	114	50
90°	0	0	0	0	0	



TEST NUMBER: P310380

CATALOG NUMBER: 24FCZ2-65HE-UNV-L82765-RDP-CP125-W2A-U-5700K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1287.4	1287.4	1287.4	1287.4	1287.4
2.5°	1289.5	1289.5	1283.4	1287.4	1287.4
5°	1287.4	1285.4	1279.3	1285.4	1285.4
7.5°	1281.4	1279.3	1275.3	1281.4	1279.3
10°	1269.2	1269.2	1265.1	1271.2	1271.2
12.5°	1259.0	1257.0	1255.0	1263.1	1261.0
15°	1242.8	1242.8	1240.7	1250.9	1248.9
17.5°	1222.5	1224.5	1226.5	1234.6	1236.7
20°	1200.1	1204.2	1206.2	1218.4	1218.4
22.5°	1179.8	1181.9	1185.9	1198.1	1198.1
25°	1153.4	1157.5	1165.6	1175.8	1177.8
27.5°	1127.0	1129.1	1139.2	1153.4	1155.5
30°	1092.5	1098.6	1110.8	1127.0	1129.1
32.5°	1062.0	1068.1	1082.3	1098.6	1102.7
35°	1023.5	1031.6	1047.8	1068.1	1072.2
37.5°	988.9	995.0	1015.3	1037.7	1043.8
40°	946.3	958.5	978.8	1005.2	1015.3
42.5°	903.6	915.8	940.2	974.7	986.9
45°	859.0	873.2	903.6	942.2	958.5
47.5°	814.3	830.5	865.1	909.7	928.0
50°	763.5	783.8	826.5	877.3	897.6
52.5°	714.8	739.2	785.9	842.7	869.1
55°	664.0	688.4	749.3	808.2	836.6
57.5°	607.2	639.7	706.7	773.7	804.1
60°	554.4	584.8	666.1	739.2	769.6
62.5°	497.5	538.1	625.4	702.6	733.1
65°	438.6	483.3	582.8	660.0	690.4
67.5°	385.8	434.6	540.2	617.3	647.8
70°	322.9	383.8	493.5	570.6	601.1
72.5°	264.0	331.0	444.7	519.9	548.3
75°	207.1	282.3	394.0	461.0	475.2
77.5°	154.3	233.5	341.2	369.6	359.4
80°	109.7	186.8	266.0	251.8	257.9
82.5°	71.1	142.1	164.5	186.8	192.9
85°	40.6	83.3	101.5	109.7	113.7
87.5°	18.3	30.5	40.6	40.6	38.6
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)