

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P310569

Luminaire Tested: **24FCZ2-30-UNV-L82765-CP187-W2A-U-5700K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P310569
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1805-783-15)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-30-UNV-L82765-CP187-W2A-U-5700K
Description: 2'X4' TROFFER LED MODULE, RIBBED LENS, 0.187" POLYCARB SHEET
Light Source: (168) 5700K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2705.0 lumens
Efficiency: N/A
Efficacy: 112.2 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.29 / 1.38
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 24.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P310569

CATALOG NUMBER: 24FCZ2-30-UNV-L82765-CP187-W2A-U-5700K

Luminous Intensity Polar Plot

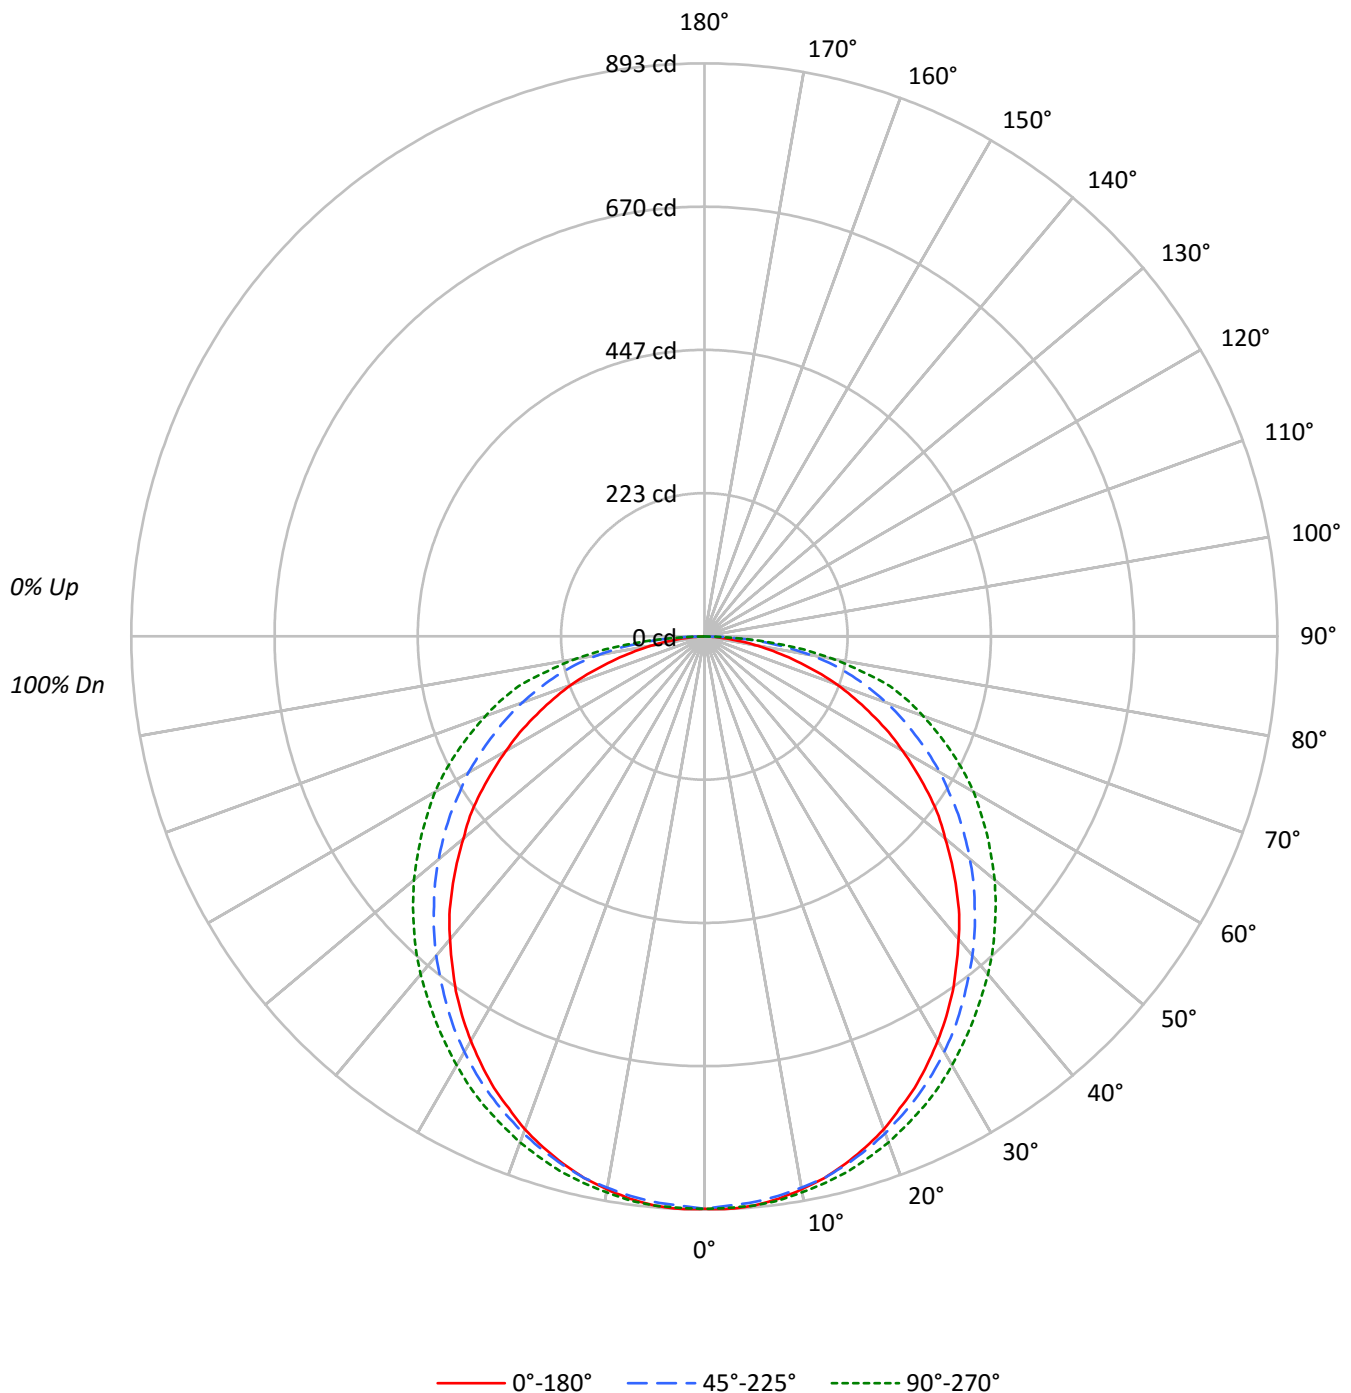



TEST NUMBER: P310569

CATALOG NUMBER: 24FCZ2-30-UNV-L82765-CP187-W2A-U-5700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	108	103	98	94	105	100	96	92	96	92	89		92	89	87		82
2	98	89	81	75	95	87	80	74	83	78	73		80	75	71		67
3	89	77	69	62	86	76	68	61	73	66	60		70	64	59		56
4	81	68	59	52	79	67	58	52	64	57	51		62	56	50		47
5	74	61	52	45	72	60	51	44	58	50	44		56	49	43		41
6	69	55	46	39	67	54	45	39	52	44	38		50	43	38		36
7	64	50	41	34	62	49	40	34	47	39	34		46	39	34		31
8	59	45	37	31	57	45	36	30	43	36	30		42	35	30		28
9	55	41	33	27	54	41	33	27	40	32	27		39	32	27		25
10	52	38	30	25	50	38	30	25	37	30	25		36	29	25		23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1200	1200	1200
5°	1202	1195	1202
10°	1195	1192	1202
15°	1185	1188	1203
20°	1171	1180	1201
25°	1152	1171	1200
30°	1131	1161	1199
35°	1109	1150	1200
40°	1083	1141	1208
45°	1057	1134	1218
50°	1026	1131	1236
55°	1000	1133	1261
60°	961	1142	1304
65°	917	1154	1351
70°	869	1190	1426
75°	775	1241	1559
80°	661	1314	1592
85°	471	1303	1524



TEST NUMBER: P310569

CATALOG NUMBER: 24FCZ2-30-UNV-L82765-CP187-W2A-U-5700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	84.4	3.1
10°-20°	241.4	8.9
20°-30°	364.6	13.5
30°-40°	439.5	16.2
40°-50°	461.3	17.1
50°-60°	431.6	16.0
60°-70°	356.4	13.2
70°-80°	242.9	9.0
80°-90°	82.8	3.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	690.4	25.5
0°-40°	1129.9	41.8
0°-60°	2022.8	74.8
0°-90°	2705.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2705.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	892	892	892	892	892	
5°	890	889	885	890	890	84
15°	851	852	853	862	863	240
25°	776	780	789	804	809	357
35°	675	682	700	723	730	422
45°	556	567	596	628	640	428
55°	426	443	483	522	538	380
65°	288	312	363	408	424	286
75°	149	183	239	284	300	159
85°	30	60	84	95	99	38
90°	0	0	0	0	0	



TEST NUMBER: P310569

CATALOG NUMBER: 24FCZ2-30-UNV-L82765-CP187-W2A-U-5700K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	892.1	892.1	892.1	892.1	892.1
2.5°	893.0	892.1	887.6	892.1	891.2
5°	890.3	889.4	884.9	890.3	890.3
7.5°	884.0	884.0	879.5	885.8	886.7
10°	875.0	875.0	872.3	879.5	879.5
12.5°	864.3	864.3	864.3	871.4	872.3
15°	850.8	851.7	852.6	861.6	863.4
17.5°	834.6	836.4	839.1	849.9	851.7
20°	817.6	819.4	823.9	836.4	839.1
22.5°	796.1	800.5	806.8	821.2	823.9
25°	776.3	779.9	788.9	804.1	808.6
27.5°	752.1	757.5	769.1	785.3	791.6
30°	727.8	733.2	747.6	766.4	771.8
32.5°	701.8	709.9	725.2	744.9	751.2
35°	674.9	682.1	700.0	723.4	730.5
37.5°	645.3	655.2	674.9	700.0	709.0
40°	616.6	627.3	649.8	676.7	687.5
42.5°	587.8	598.6	623.7	654.3	665.0
45°	555.5	567.2	595.9	628.2	639.9
47.5°	523.2	537.6	569.0	603.1	615.7
50°	490.0	506.2	540.3	576.2	590.5
52.5°	460.4	475.7	511.6	550.1	563.6
55°	426.3	443.4	482.8	522.3	537.6
57.5°	391.3	410.1	452.3	495.4	510.7
60°	357.2	377.8	424.5	467.6	484.6
62.5°	324.0	344.6	393.1	438.0	455.0
65°	288.1	312.3	362.6	408.3	424.5
67.5°	254.0	280.0	333.0	377.8	394.0
70°	220.8	245.9	302.4	346.4	362.6
72.5°	184.9	213.6	270.1	315.9	333.0
75°	149.0	183.1	238.7	283.6	299.8
77.5°	115.8	150.8	206.4	243.2	251.3
80°	85.3	121.2	169.6	195.6	205.5
82.5°	54.7	90.6	129.2	148.1	156.2
85°	30.5	60.1	84.4	95.1	98.7
87.5°	12.6	26.0	34.1	38.6	38.6
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)