

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P310578

Luminaire Tested: **24FCZ2-30-UNV-L82765-CP250-W2A-U-5700K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P310578
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1805-783-15)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-30-UNV-L82765-CP250-W2A-U-5700K
Description: 2'X4' TROFFER LED MODULE, RIBBED LENS, 0.250" POLYCARB SHEET
Light Source: (168) 5700K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2683.0 lumens
Efficiency: N/A
Efficacy: 111.3 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.29 / 1.38
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 24.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P310578

CATALOG NUMBER: 24FCZ2-30-UNV-L82765-CP250-W2A-U-5700K

Luminous Intensity Polar Plot

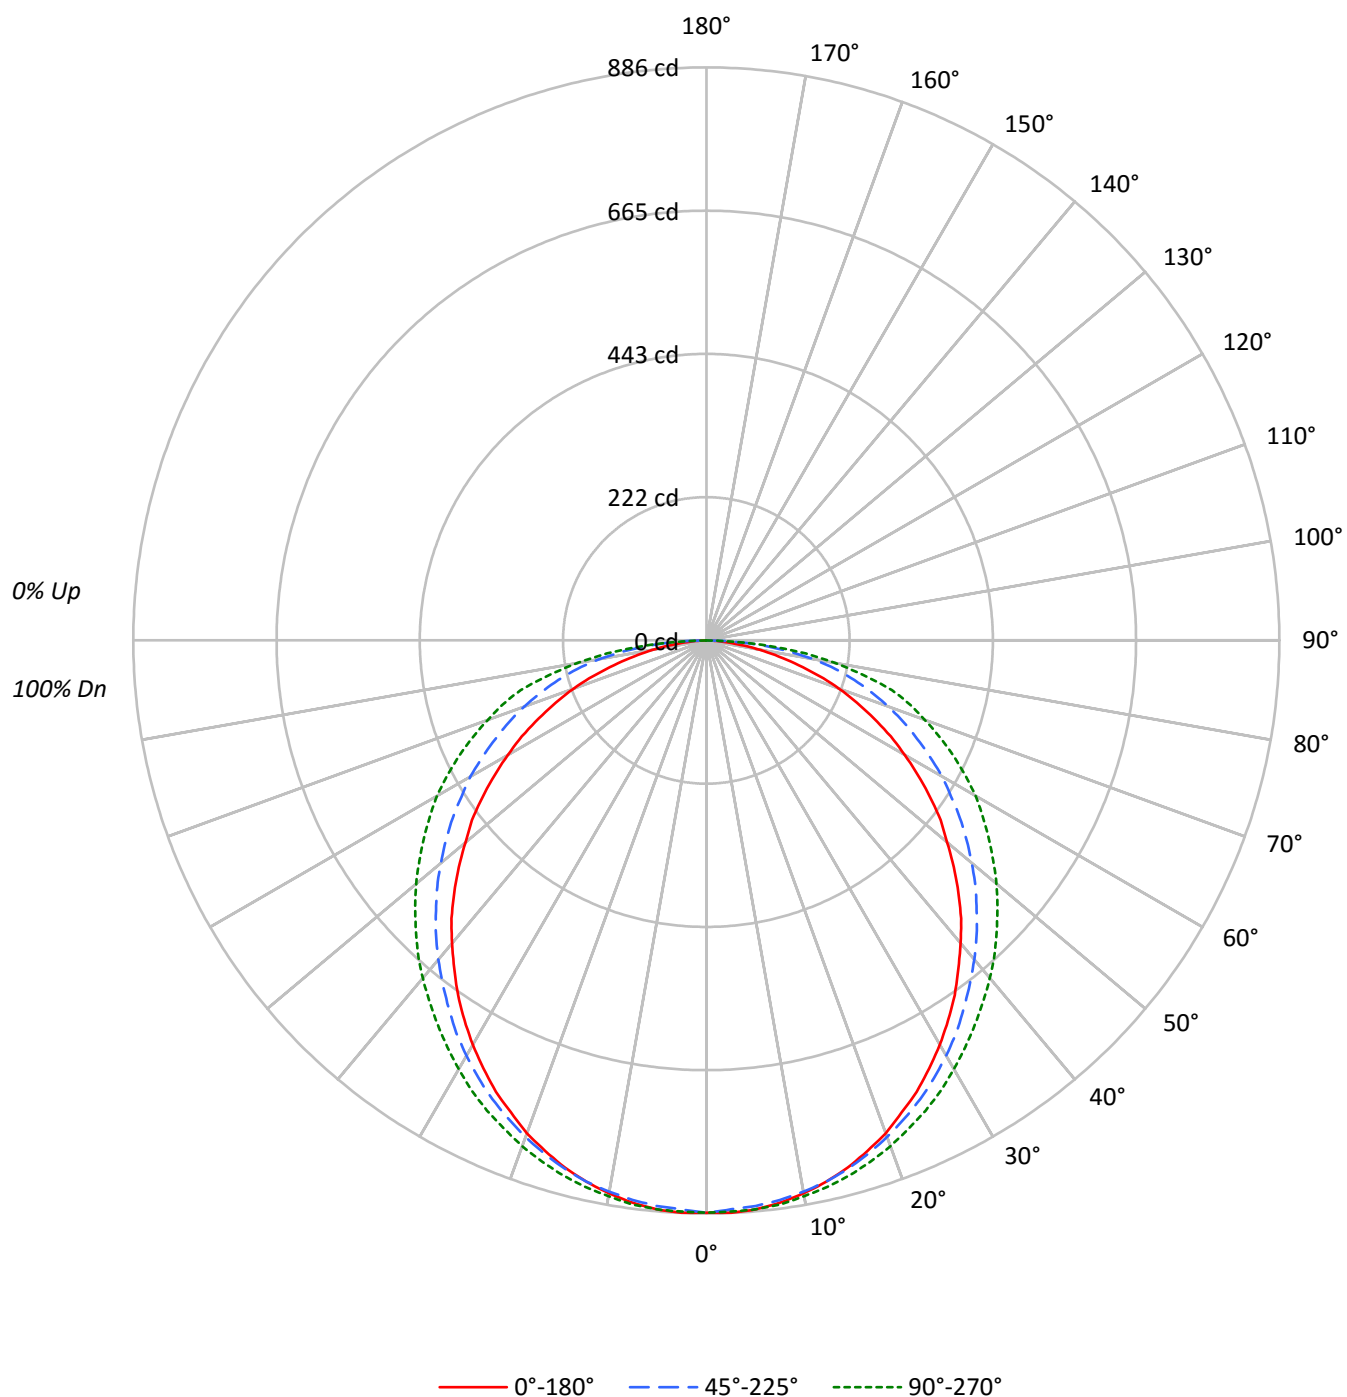



TEST NUMBER: P310578

CATALOG NUMBER: 24FCZ2-30-UNV-L82765-CP250-W2A-U-5700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	108	103	98	94	105	100	96	92	96	92	89		92	89	87		82
2	98	89	81	75	95	87	80	74	83	78	73		80	75	71		67
3	89	77	69	62	86	76	68	61	73	66	60		70	64	59		56
4	81	68	59	52	79	67	58	52	64	57	51		62	56	50		47
5	74	61	52	45	72	60	51	44	58	50	44		56	49	43		41
6	69	55	46	39	67	54	45	39	52	44	38		50	43	38		36
7	64	50	41	34	62	49	40	34	47	39	34		46	39	34		31
8	59	45	37	31	57	45	36	30	43	36	30		42	35	30		28
9	55	41	33	27	54	41	33	27	40	32	27		39	32	27		25
10	52	38	30	25	50	38	30	25	37	30	25		36	29	25		23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1190	1190	1190
5°	1193	1185	1193
10°	1186	1182	1192
15°	1176	1178	1193
20°	1161	1170	1192
25°	1143	1162	1191
30°	1122	1152	1189
35°	1100	1140	1190
40°	1074	1132	1198
45°	1048	1125	1208
50°	1017	1122	1226
55°	992	1123	1251
60°	953	1133	1294
65°	910	1145	1341
70°	862	1180	1415
75°	768	1231	1546
80°	656	1303	1579
85°	468	1292	1511



TEST NUMBER: P310578

CATALOG NUMBER: 24FCZ2-30-UNV-L82765-CP250-W2A-U-5700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	83.7	3.1
10°-20°	239.4	8.9
20°-30°	361.7	13.5
30°-40°	435.9	16.2
40°-50°	457.6	17.1
50°-60°	428.1	16.0
60°-70°	353.5	13.2
70°-80°	240.9	9.0
80°-90°	82.2	3.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	684.8	25.5
0°-40°	1120.7	41.8
0°-60°	2006.4	74.8
0°-90°	2683.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2683.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	885	885	885	885	885	
5°	883	882	878	883	883	84
15°	844	845	846	855	856	238
25°	770	774	782	798	802	354
35°	669	676	694	718	725	418
45°	551	563	591	623	635	425
55°	423	440	479	518	533	377
65°	286	310	360	405	421	283
75°	148	182	237	281	297	158
85°	30	60	84	94	98	38
90°	0	0	0	0	0	



TEST NUMBER: P310578

CATALOG NUMBER: 24FCZ2-30-UNV-L82765-CP250-W2A-U-5700K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	884.8	884.8	884.8	884.8	884.8
2.5°	885.7	884.8	880.4	884.8	883.9
5°	883.0	882.2	877.7	883.0	883.0
7.5°	876.8	876.8	872.4	878.6	879.5
10°	867.9	867.9	865.2	872.4	872.4
12.5°	857.2	857.2	857.2	864.4	865.2
15°	843.9	844.8	845.7	854.6	856.3
17.5°	827.9	829.6	832.3	843.0	844.8
20°	810.9	812.7	817.2	829.6	832.3
22.5°	789.6	794.0	800.3	814.5	817.2
25°	770.0	773.6	782.5	797.6	802.0
27.5°	746.0	751.3	762.9	778.9	785.1
30°	721.9	727.3	741.5	760.2	765.5
32.5°	696.1	704.1	719.3	738.8	745.1
35°	669.4	676.5	694.3	717.5	724.6
37.5°	640.0	649.8	669.4	694.3	703.2
40°	611.5	622.2	644.5	671.2	681.9
42.5°	583.1	593.7	618.7	648.9	659.6
45°	551.0	562.6	591.1	623.1	634.7
47.5°	519.0	533.2	564.4	598.2	610.7
50°	486.0	502.1	535.9	571.5	585.7
52.5°	456.7	471.8	507.4	545.7	559.0
55°	422.8	439.7	478.9	518.1	533.2
57.5°	388.1	406.8	448.6	491.4	506.5
60°	354.3	374.8	421.1	463.8	480.7
62.5°	321.4	341.8	389.9	434.4	451.3
65°	285.7	309.8	359.6	405.0	421.1
67.5°	251.9	277.7	330.3	374.8	390.8
70°	219.0	243.9	300.0	343.6	359.6
72.5°	183.4	211.9	267.9	313.3	330.3
75°	147.8	181.6	236.8	281.3	297.3
77.5°	114.8	149.5	204.7	241.2	249.2
80°	84.6	120.2	168.2	194.1	203.8
82.5°	54.3	89.9	128.2	146.9	154.9
85°	30.3	59.6	83.7	94.4	97.9
87.5°	12.5	25.8	33.8	38.3	38.3
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)