

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P310504

Luminaire Tested: **24FCZ2-30HE-UNV-L82765-CA125-W2A-U-5000K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P310504
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1805-783-15)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-30HE-UNV-L82765-CA125-W2A-U-5000K
Description: 2'X4' TROFFER LED MODULE, RIBBED LENS, 0.125" ACRYLIC SHEET
Light Source: (336) 5000K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2880.0 lumens
Efficiency: N/A
Efficacy: 133.3 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.29 / 1.38
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 21.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P310504

CATALOG NUMBER: 24FCZ2-30HE-UNV-L82765-CA125-W2A-U-5000K

Luminous Intensity Polar Plot

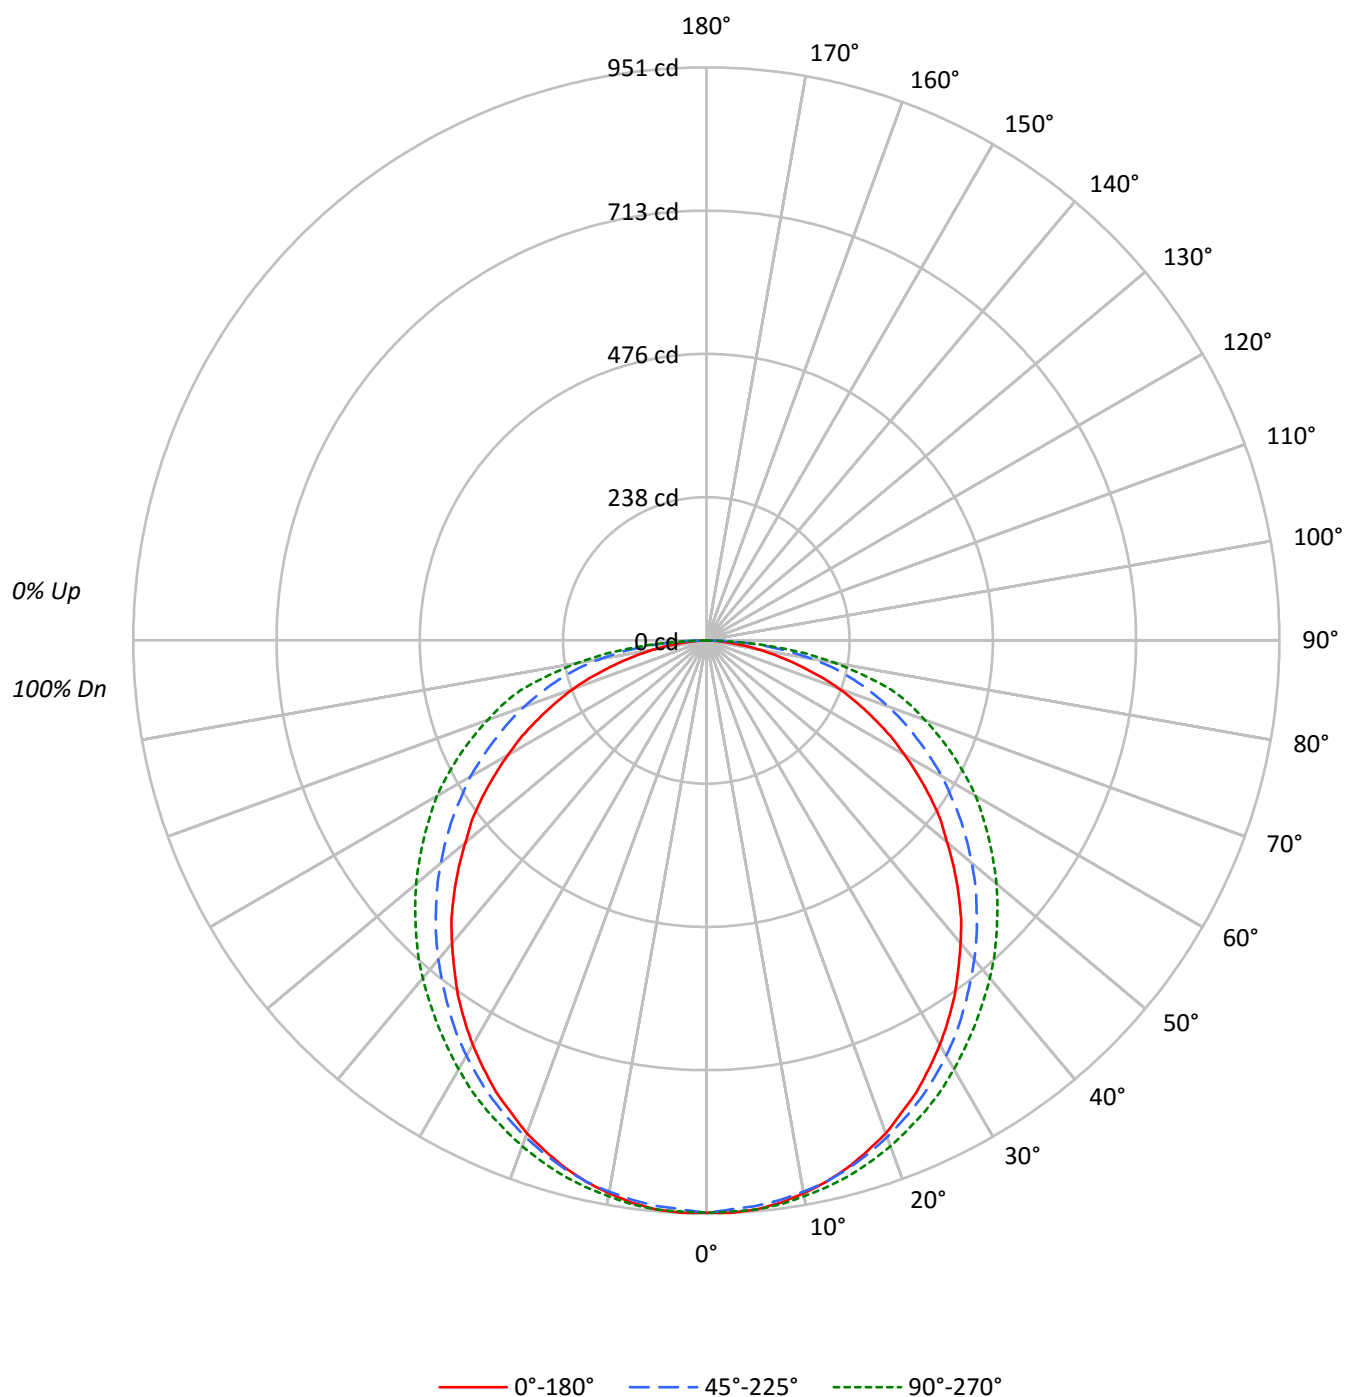



TEST NUMBER: P310504

CATALOG NUMBER: 24FCZ2-30HE-UNV-L82765-CA125-W2A-U-5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	108	103	98	94	105	100	96	92	96	92	89		92	89	87		82
2	98	89	81	75	95	87	80	74	83	78	73		80	75	71		67
3	89	77	69	62	86	76	68	61	73	66	60		70	64	59		56
4	81	68	59	52	79	67	58	52	64	57	51		62	56	50		47
5	74	61	52	45	72	60	51	44	58	50	44		56	49	43		41
6	69	55	46	39	67	54	45	39	52	44	38		50	43	38		36
7	64	50	41	34	62	49	40	34	47	39	34		46	39	34		31
8	59	45	37	31	57	45	36	30	43	36	30		42	35	30		28
9	55	41	33	27	54	41	33	27	40	32	27		39	32	27		25
10	52	38	30	25	50	38	30	25	37	30	25		36	29	25		23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1278	1278	1278
5°	1280	1273	1280
10°	1273	1269	1279
15°	1262	1265	1280
20°	1246	1256	1279
25°	1227	1247	1278
30°	1204	1237	1277
35°	1180	1224	1278
40°	1153	1215	1286
45°	1126	1207	1296
50°	1092	1204	1316
55°	1065	1206	1343
60°	1023	1216	1389
65°	976	1229	1439
70°	925	1267	1519
75°	824	1321	1659
80°	704	1399	1695
85°	502	1386	1623



TEST NUMBER: P310504

CATALOG NUMBER: 24FCZ2-30HE-UNV-L82765-CA125-W2A-U-5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	89.9	3.1
10°-20°	257.0	8.9
20°-30°	388.2	13.5
30°-40°	467.9	16.2
40°-50°	491.2	17.1
50°-60°	459.5	16.0
60°-70°	379.5	13.2
70°-80°	258.6	9.0
80°-90°	88.2	3.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	735.1	25.5
0°-40°	1203.0	41.8
0°-60°	2153.7	74.8
0°-90°	2880.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2880.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	950	950	950	950	950	
5°	948	947	942	948	948	90
15°	906	907	908	917	919	255
25°	826	830	840	856	861	380
35°	719	726	745	770	778	449
45°	592	604	634	669	681	456
55°	454	472	514	556	572	405
65°	307	332	386	435	452	304
75°	159	195	254	302	319	169
85°	32	64	90	101	105	41
90°	0	0	0	0	0	



TEST NUMBER: P310504

CATALOG NUMBER: 24FCZ2-30HE-UNV-L82765-CA125-W2A-U-5000K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	949.8	949.8	949.8	949.8	949.8
2.5°	950.8	949.8	945.0	949.8	948.8
5°	947.9	946.9	942.2	947.9	947.9
7.5°	941.2	941.2	936.4	943.1	944.1
10°	931.6	931.6	928.8	936.4	936.4
12.5°	920.2	920.2	920.2	927.8	928.8
15°	905.8	906.8	907.8	917.3	919.2
17.5°	888.6	890.6	893.4	904.9	906.8
20°	870.5	872.4	877.2	890.6	893.4
22.5°	847.6	852.3	859.0	874.3	877.2
25°	826.5	830.4	839.9	856.2	860.9
27.5°	800.7	806.5	818.9	836.1	842.8
30°	774.9	780.7	796.0	816.0	821.8
32.5°	747.2	755.8	772.1	793.1	799.8
35°	718.6	726.2	745.3	770.2	777.8
37.5°	687.0	697.5	718.6	745.3	754.9
40°	656.5	667.9	691.8	720.5	731.9
42.5°	625.9	637.3	664.1	696.6	708.0
45°	591.5	603.9	634.5	668.9	681.3
47.5°	557.1	572.4	605.8	642.1	655.5
50°	521.7	538.9	575.2	613.5	628.7
52.5°	490.2	506.4	544.7	585.7	600.1
55°	453.9	472.0	514.1	556.1	572.4
57.5°	416.6	436.7	481.6	527.5	543.7
60°	380.3	402.3	452.0	497.8	516.0
62.5°	344.9	366.9	418.5	466.3	484.5
65°	306.7	332.5	386.0	434.8	452.0
67.5°	270.4	298.1	354.5	402.3	419.5
70°	235.1	261.8	322.0	368.8	386.0
72.5°	196.8	227.4	287.6	336.3	354.5
75°	158.6	194.9	254.2	301.9	319.1
77.5°	123.3	160.5	219.8	258.9	267.5
80°	90.8	129.0	180.6	208.3	218.8
82.5°	58.3	96.5	137.6	157.7	166.3
85°	32.5	64.0	89.8	101.3	105.1
87.5°	13.4	27.7	36.3	41.1	41.1
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)