

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P310635

Luminaire Tested: **24FCZ2-35-UNV-L82765-CA125-W2A-U-3000K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P310635
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1805-783-15)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-35-UNV-L82765-CA125-W2A-U-3000K
Description: 2'X4' TROFFER LED MODULE, RIBBED LENS, 0.125" ACRYLIC SHEET
Light Source: (168) 3000K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3059.0 lumens
Efficiency: N/A
Efficacy: 110.0 lumens/watt
Spacing Criteria (0/90/45): 1.22 / 1.29 / 1.38
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 27.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P310635

CATALOG NUMBER: 24FCZ2-35-UNV-L82765-CA125-W2A-U-3000K

Luminous Intensity Polar Plot

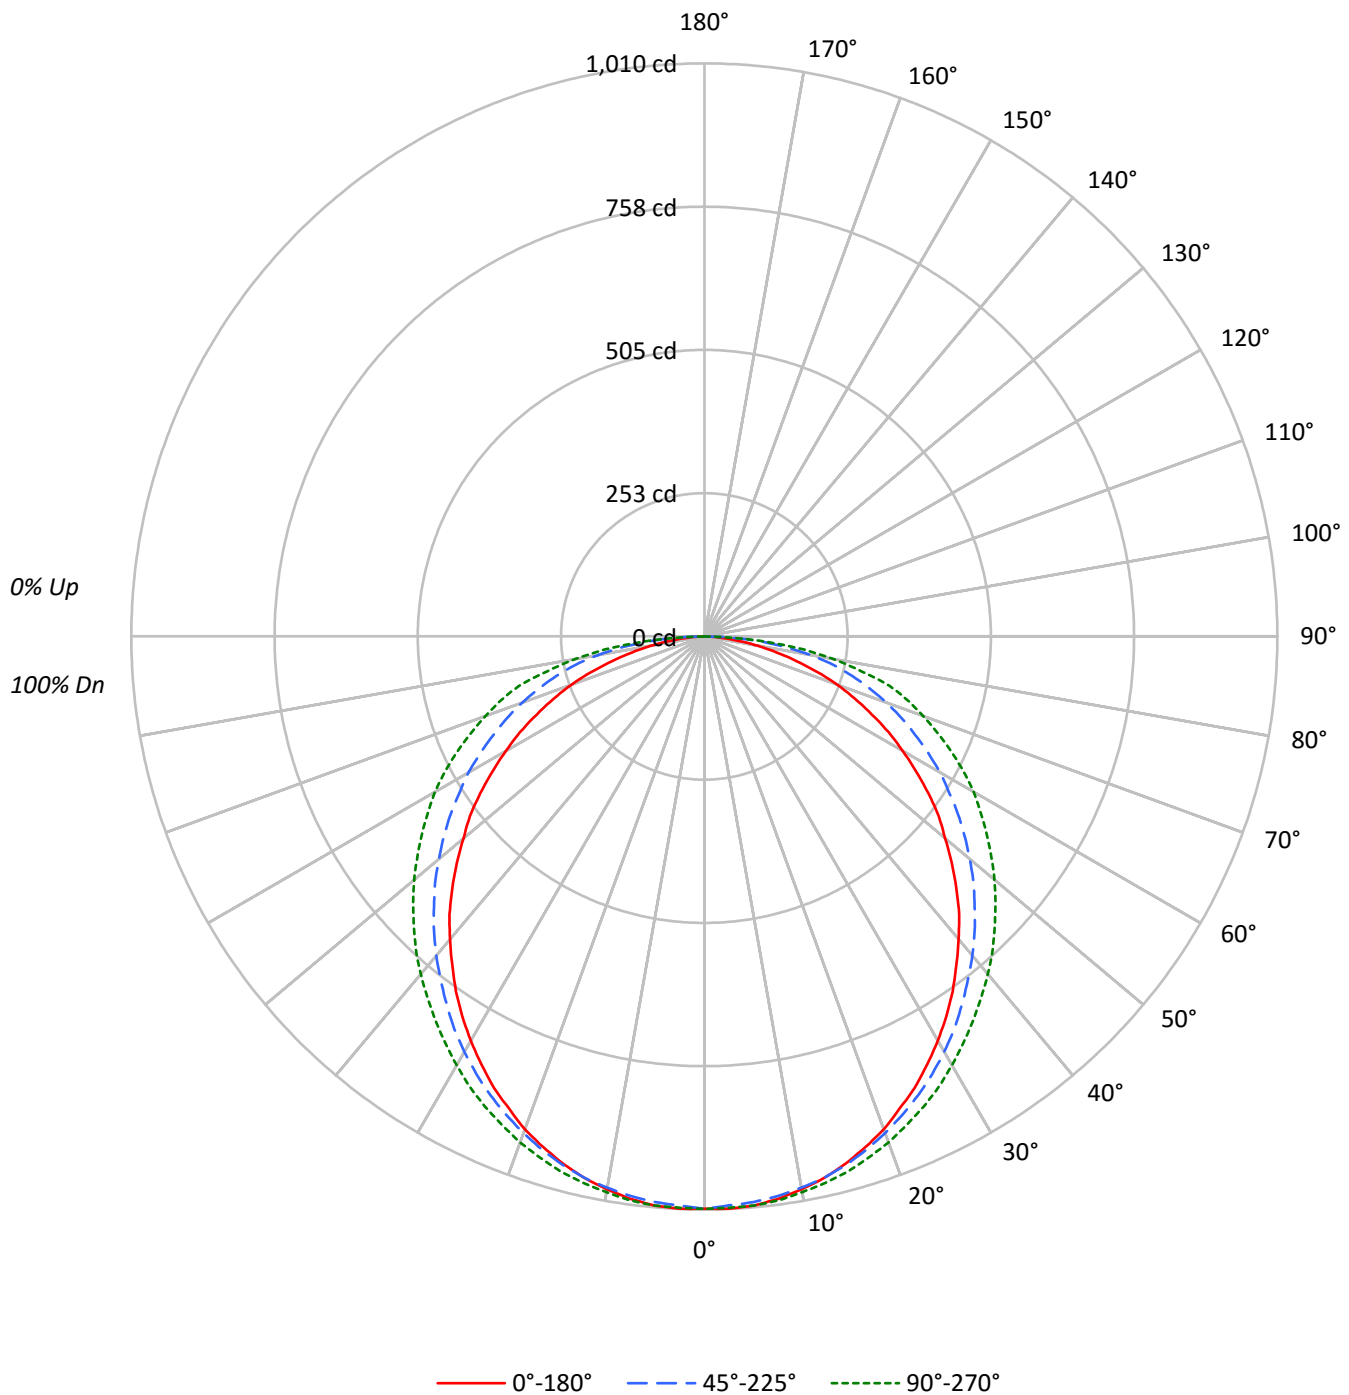



TEST NUMBER: P310635

CATALOG NUMBER: 24FCZ2-35-UNV-L82765-CA125-W2A-U-3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	108	103	98	94	105	100	96	92	96	92	89		92	89	87		82
2	98	89	81	75	95	87	80	74	83	78	73		80	75	71		67
3	89	77	69	62	86	76	68	61	73	66	60		70	64	59		56
4	81	68	59	52	79	67	58	52	64	57	51		62	56	50		47
5	74	61	52	45	72	60	51	44	58	50	44		56	49	43		41
6	69	55	46	39	67	54	45	39	52	44	38		50	43	38		36
7	64	50	41	34	62	49	40	34	47	39	34		46	39	34		31
8	59	45	37	31	57	45	36	30	43	36	30		42	35	30		28
9	55	41	33	27	54	41	33	27	40	32	27		39	32	27		25
10	52	38	30	25	50	38	30	25	37	30	25		36	29	25		23

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1357	1357	1357
5°	1360	1352	1360
10°	1352	1348	1359
15°	1340	1343	1360
20°	1324	1334	1359
25°	1303	1324	1358
30°	1279	1313	1356
35°	1254	1300	1357
40°	1225	1291	1365
45°	1195	1282	1377
50°	1160	1279	1398
55°	1131	1281	1426
60°	1087	1292	1475
65°	1037	1305	1528
70°	982	1345	1613
75°	876	1404	1762
80°	747	1486	1801
85°	533	1473	1723



TEST NUMBER: P310635

CATALOG NUMBER: 24FCZ2-35-UNV-L82765-CA125-W2A-U-3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	95.5	3.1
10°-20°	273.0	8.9
20°-30°	412.3	13.5
30°-40°	497.0	16.2
40°-50°	521.7	17.1
50°-60°	488.1	16.0
60°-70°	403.1	13.2
70°-80°	274.7	9.0
80°-90°	93.7	3.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	780.8	25.5
0°-40°	1277.8	41.8
0°-60°	2287.6	74.8
0°-90°	3059.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3059.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1009	1009	1009	1009	1009	
5°	1007	1006	1001	1007	1007	96
15°	962	963	964	974	976	271
25°	878	882	892	909	914	404
35°	763	771	792	818	826	477
45°	628	641	674	710	724	485
55°	482	501	546	591	608	430
65°	326	353	410	462	480	323
75°	168	207	270	321	339	180
85°	34	68	95	108	112	43
90°	0	0	0	0	0	



TEST NUMBER: P310635

CATALOG NUMBER: 24FCZ2-35-UNV-L82765-CA125-W2A-U-3000K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1008.8	1008.8	1008.8	1008.8	1008.8
2.5°	1009.8	1008.8	1003.8	1008.8	1007.8
5°	1006.8	1005.8	1000.7	1006.8	1006.8
7.5°	999.7	999.7	994.6	1001.7	1002.7
10°	989.5	989.5	986.5	994.6	994.6
12.5°	977.4	977.4	977.4	985.5	986.5
15°	962.1	963.2	964.2	974.3	976.4
17.5°	943.9	945.9	949.0	961.1	963.2
20°	924.6	926.6	931.7	945.9	949.0
22.5°	900.2	905.3	912.4	928.7	931.7
25°	877.9	882.0	892.1	909.4	914.4
27.5°	850.5	856.6	869.8	888.1	895.2
30°	823.1	829.2	845.4	866.7	872.8
32.5°	793.7	802.8	820.1	842.4	849.5
35°	763.2	771.3	791.6	818.0	826.1
37.5°	729.7	740.9	763.2	791.6	801.8
40°	697.3	709.4	734.8	765.3	777.4
42.5°	664.8	677.0	705.4	739.9	752.1
45°	628.2	641.4	673.9	710.4	723.6
47.5°	591.7	607.9	643.5	682.0	696.2
50°	554.1	572.4	611.0	651.6	667.8
52.5°	520.7	537.9	578.5	622.1	637.4
55°	482.1	501.4	546.0	590.7	607.9
57.5°	442.5	463.8	511.5	560.2	577.5
60°	403.9	427.3	480.1	528.8	548.1
62.5°	366.4	389.7	444.5	495.3	514.6
65°	325.8	353.2	410.0	461.8	480.1
67.5°	287.2	316.7	376.5	427.3	445.6
70°	249.7	278.1	342.0	391.8	410.0
72.5°	209.1	241.6	305.5	357.3	376.5
75°	168.5	207.0	270.0	320.7	339.0
77.5°	130.9	170.5	233.4	275.0	284.2
80°	96.4	137.0	191.8	221.3	232.4
82.5°	61.9	102.5	146.1	167.5	176.6
85°	34.5	68.0	95.4	107.6	111.6
87.5°	14.2	29.4	38.6	43.6	43.6
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)