

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P311336

Luminaire Tested: **24FCZ2-35-UNV-L82765-S-CP250-W2A-U-2700K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P311336
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1805-783-1)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-35-UNV-L82765-S-CP250-W2A-U-2700K
Description: 2'X4' TROFFER LED MODULE, SMOOTH LENS, 0.250" POLYCARB SHEET
Light Source: (168) 2700K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2910.0 lumens
Efficiency: N/A
Efficacy: 103.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.26 / 1.35
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P311336

CATALOG NUMBER: 24FCZ2-35-UNV-L82765-S-CP250-W2A-U-2700K

Luminous Intensity Polar Plot

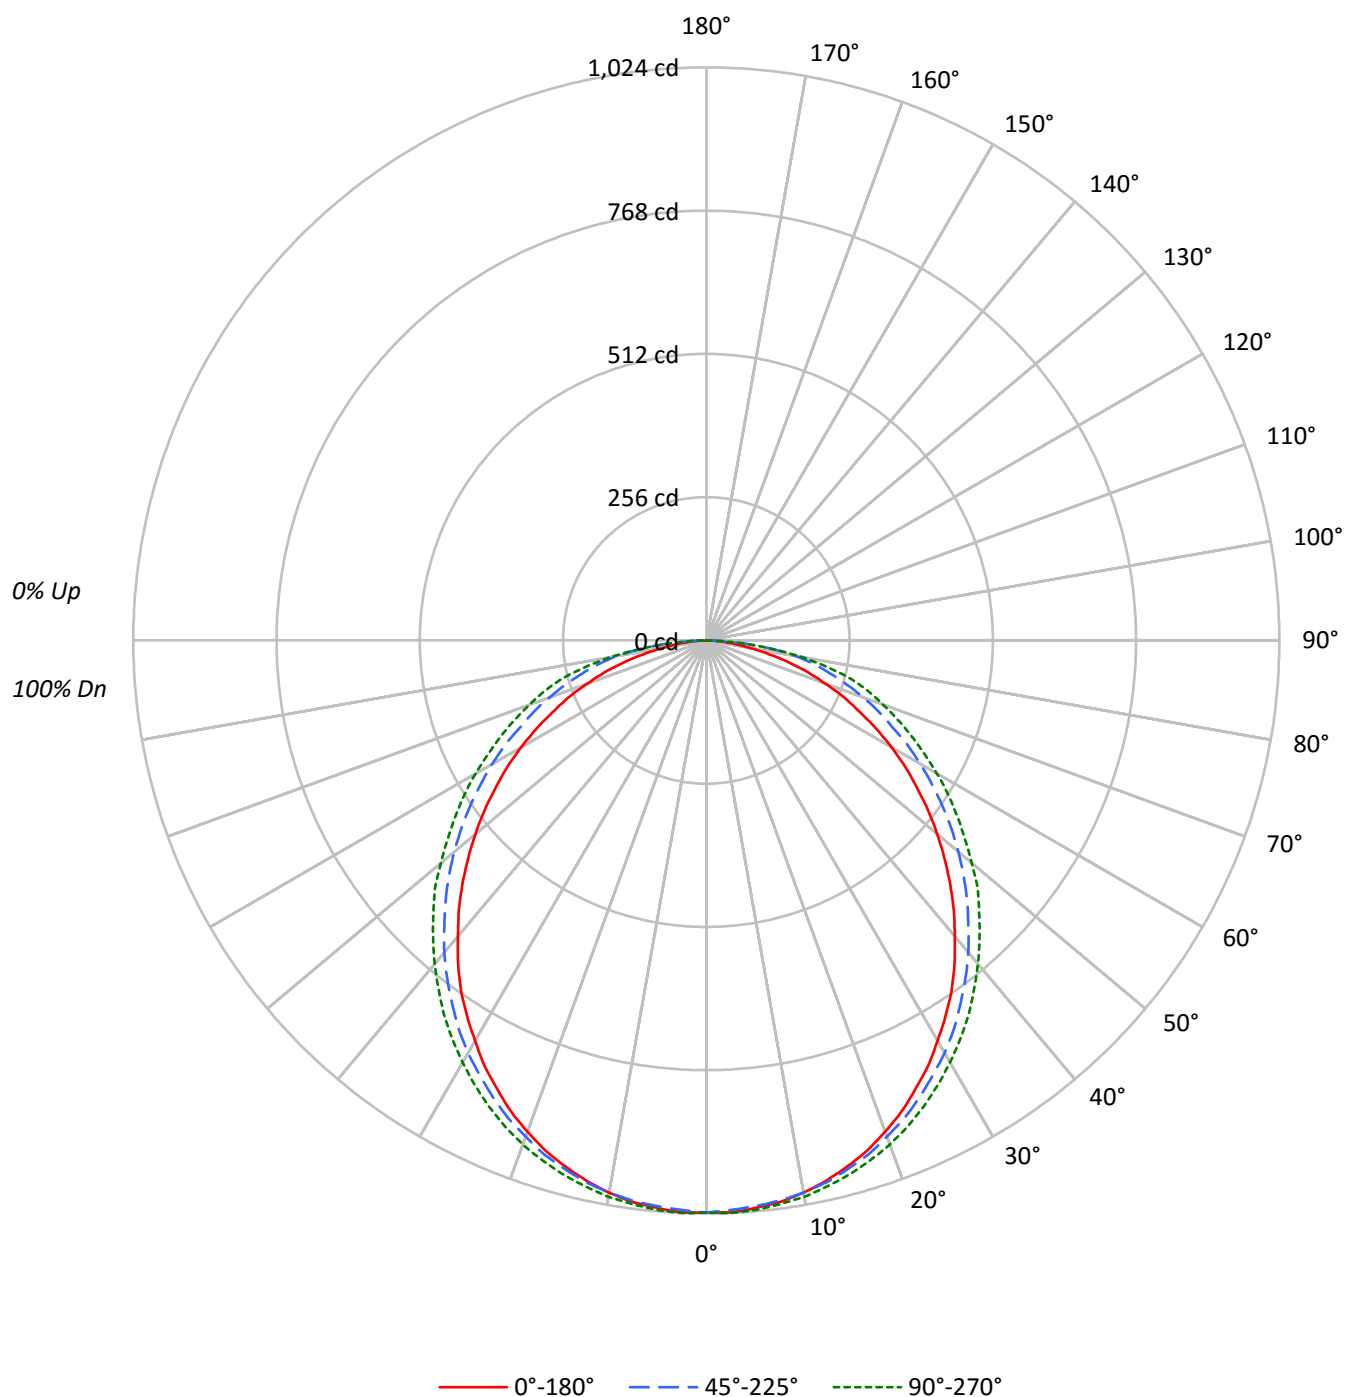



TEST NUMBER: P311336

CATALOG NUMBER: 24FCZ2-35-UNV-L82765-S-CP250-W2A-U-2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	108	103	99	95	106	101	97	93	97	93	90		93	90	88		83
2	98	90	83	77	96	88	81	76	84	79	74		81	76	72		69
3	89	79	70	64	87	77	69	63	74	67	62		71	66	61		58
4	82	70	61	54	80	68	60	54	66	59	53		63	57	52		49
5	75	62	53	46	73	61	53	46	59	51	46		57	50	45		42
6	70	56	47	40	68	55	47	40	53	46	40		52	45	40		37
7	64	51	42	36	63	50	42	36	48	41	35		47	40	35		33
8	60	46	38	32	58	46	37	32	44	37	32		43	36	31		29
9	56	43	34	29	55	42	34	29	41	34	28		40	33	28		26
10	53	39	31	26	51	39	31	26	38	31	26		37	30	26		24

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1375	1375	1375
5°	1375	1371	1380
10°	1369	1369	1379
15°	1356	1362	1376
20°	1338	1351	1372
25°	1313	1338	1364
30°	1284	1323	1353
35°	1256	1301	1342
40°	1213	1279	1326
45°	1173	1254	1312
50°	1128	1231	1296
55°	1078	1208	1284
60°	1027	1189	1281
65°	962	1168	1289
70°	891	1175	1324
75°	797	1197	1398
80°	645	1268	1368
85°	485	1113	1084



TEST NUMBER: P311336

CATALOG NUMBER: 24FCZ2-35-UNV-L82765-S-CP250-W2A-U-2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	96.8	3.3
10°-20°	276.5	9.5
20°-30°	415.7	14.3
30°-40°	495.2	17.0
40°-50°	506.8	17.4
50°-60°	456.3	15.7
60°-70°	358.3	12.3
70°-80°	232.6	8.0
80°-90°	71.9	2.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	789.0	27.1
0°-40°	1284.2	44.1
0°-60°	2247.2	77.2
0°-90°	2910.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2910.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1022	1022	1022	1022	1022	
5°	1018	1020	1015	1020	1021	97
15°	973	976	978	986	988	274
25°	885	892	901	916	919	408
35°	764	774	792	812	817	477
45°	616	631	659	684	690	475
55°	459	480	515	542	547	412
65°	302	325	367	398	405	301
75°	153	183	230	262	269	162
85°	31	58	72	70	70	38
90°	0	0	0	0	0	



TEST NUMBER: P311336

CATALOG NUMBER: 24FCZ2-35-UNV-L82765-S-CP250-W2A-U-2700K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1022.3	1022.3	1022.3	1022.3	1022.3
2.5°	1023.2	1023.2	1018.6	1023.2	1024.2
5°	1017.7	1019.5	1014.9	1020.5	1021.4
7.5°	1012.1	1012.1	1009.4	1014.9	1015.8
10°	1002.0	1002.9	1002.0	1008.4	1009.4
12.5°	989.0	990.9	991.8	998.3	999.2
15°	973.3	976.1	977.9	986.3	988.1
17.5°	955.8	958.5	963.1	972.4	974.2
20°	934.5	938.2	943.7	955.8	958.5
22.5°	911.4	915.1	924.3	935.4	940.0
25°	884.6	892.0	901.2	916.0	918.8
27.5°	857.8	864.2	876.3	892.0	895.7
30°	826.3	836.5	851.3	867.0	870.7
32.5°	795.8	806.0	823.6	840.2	844.8
35°	764.4	773.7	792.1	811.6	817.1
37.5°	728.4	740.4	760.7	780.1	785.7
40°	690.5	705.3	728.4	748.7	755.2
42.5°	654.4	670.1	693.2	715.4	722.8
45°	616.5	631.3	659.0	684.0	689.5
47.5°	577.7	594.3	623.9	648.9	658.1
50°	538.9	556.4	587.9	613.8	619.3
52.5°	500.1	518.5	551.8	579.6	582.3
55°	459.4	479.7	514.8	541.7	547.2
57.5°	422.4	440.0	477.9	505.6	512.1
60°	381.7	401.2	441.8	467.7	476.0
62.5°	342.9	363.3	405.8	431.7	439.1
65°	302.3	325.4	367.0	397.5	404.9
67.5°	267.1	289.3	333.7	363.3	370.7
70°	226.5	251.4	298.6	329.1	336.5
72.5°	191.3	217.2	264.4	293.9	305.0
75°	153.4	183.0	230.2	261.6	269.0
77.5°	116.5	150.7	198.7	222.8	222.8
80°	83.2	119.2	163.6	174.7	176.5
82.5°	54.5	89.7	121.1	120.2	120.2
85°	31.4	58.2	72.1	70.2	70.2
87.5°	12.0	24.0	25.9	25.9	25.0
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)