

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P311606

Luminaire Tested: **24FCZ2-50-UNV-L82765-S-CP250-W2A-U-2700K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

Test Information

Test Method: LM-79-08
Report Number: P311606
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1805-783-1)
Test Lab: INNOVATION CENTER(G3)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: FAIL-SAFE
Catalog Number: 24FCZ2-50-UNV-L82765-S-CP250-W2A-U-2700K
Description: 2'X4' TROFFER LED MODULE, SMOOTH LENS, 0.250" POLYCARB SHEET
Light Source: (168) 2700K TUNABLE CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4092.0 lumens
Efficiency: N/A
Efficacy: 95.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.27 / 1.35
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')
CIE Type: Direct


Input Watts (W): 42.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P311606

CATALOG NUMBER: 24FCZ2-50-UNV-L82765-S-CP250-W2A-U-2700K

Luminous Intensity Polar Plot

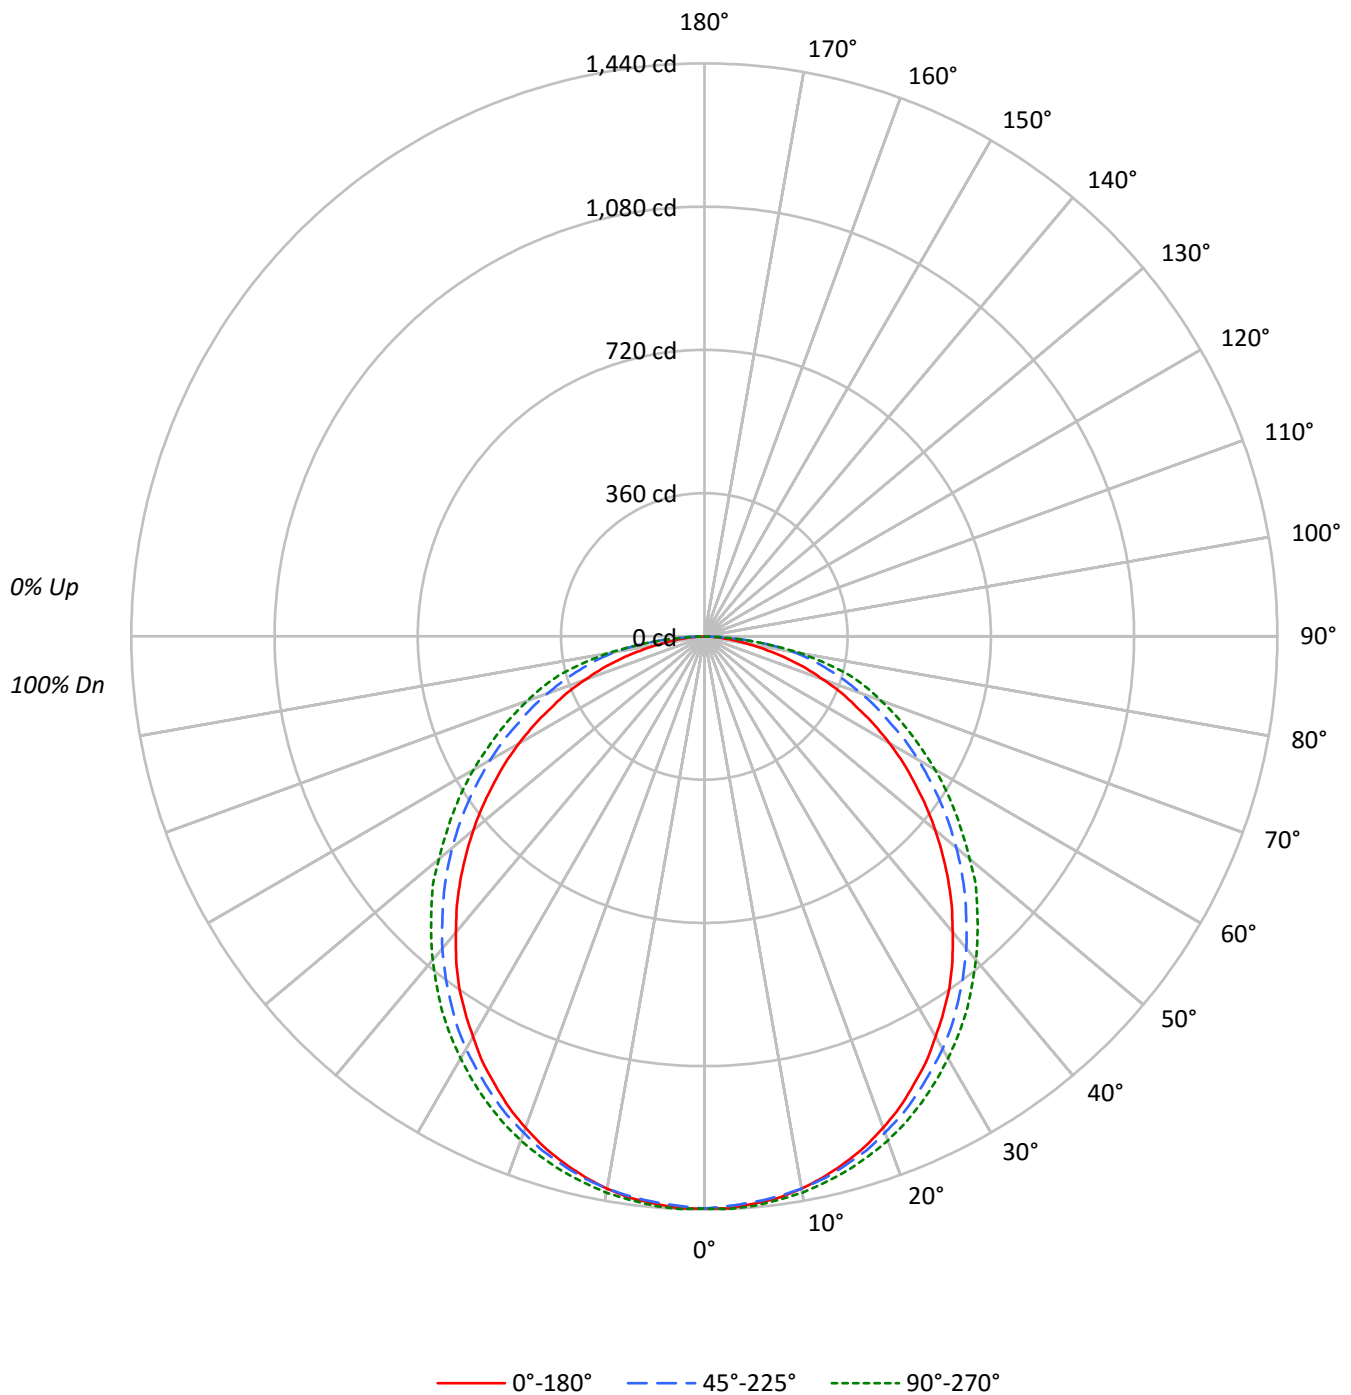



TEST NUMBER: P311606

CATALOG NUMBER: 24FCZ2-50-UNV-L82765-S-CP250-W2A-U-2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	108	103	99	95	106	101	97	93	97	93	90		93	90	88		83
2	98	90	83	77	96	88	81	76	84	79	74		81	76	72		69
3	89	79	70	64	87	77	69	63	74	67	62		71	66	61		58
4	82	70	61	54	80	68	60	54	66	59	53		63	57	52		49
5	75	62	53	46	73	61	53	46	59	51	46		57	50	45		42
6	70	56	47	40	68	55	47	40	53	46	40		52	45	40		37
7	64	51	42	36	63	50	42	36	48	41	35		47	40	35		33
8	60	46	38	32	58	46	37	32	44	37	32		43	36	31		29
9	56	43	34	29	55	42	34	29	41	34	28		40	33	28		26
10	53	39	31	26	51	39	31	26	38	31	26		37	30	26		24

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1934	1934	1934
5°	1933	1927	1940
10°	1925	1925	1939
15°	1907	1916	1936
20°	1882	1900	1930
25°	1847	1881	1918
30°	1805	1860	1902
35°	1766	1830	1887
40°	1705	1799	1865
45°	1650	1763	1845
50°	1586	1730	1823
55°	1515	1698	1805
60°	1445	1672	1801
65°	1353	1643	1812
70°	1253	1651	1861
75°	1122	1682	1966
80°	907	1783	1924
85°	682	1565	1525



TEST NUMBER: P311606

CATALOG NUMBER: 24FCZ2-50-UNV-L82765-S-CP250-W2A-U-2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	136.1	3.3
10°-20°	388.9	9.5
20°-30°	584.6	14.3
30°-40°	696.3	17.0
40°-50°	712.6	17.4
50°-60°	641.6	15.7
60°-70°	503.8	12.3
70°-80°	327.0	8.0
80°-90°	101.2	2.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1109.5	27.1
0°-40°	1805.8	44.1
0°-60°	3160.0	77.2
0°-90°	4092.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4092.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1438	1438	1438	1438	1438	
5°	1431	1434	1427	1435	1436	136
15°	1369	1373	1375	1387	1390	386
25°	1244	1254	1267	1288	1292	573
35°	1075	1088	1114	1141	1149	671
45°	867	888	927	962	970	668
55°	646	675	724	762	770	579
65°	425	458	516	559	569	423
75°	216	257	324	368	378	228
85°	44	82	101	99	99	53
90°	0	0	0	0	0	



TEST NUMBER: P311606

CATALOG NUMBER: 24FCZ2-50-UNV-L82765-S-CP250-W2A-U-2700K

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1437.5	1437.5	1437.5	1437.5	1437.5
2.5°	1438.8	1438.8	1432.3	1438.8	1440.1
5°	1431.0	1433.6	1427.1	1434.9	1436.2
7.5°	1423.2	1423.2	1419.3	1427.1	1428.4
10°	1409.0	1410.3	1409.0	1418.0	1419.3
12.5°	1390.8	1393.4	1394.7	1403.8	1405.1
15°	1368.7	1372.6	1375.2	1386.9	1389.5
17.5°	1344.0	1347.9	1354.4	1367.4	1370.0
20°	1314.1	1319.3	1327.1	1344.0	1347.9
22.5°	1281.6	1286.8	1299.8	1315.4	1321.9
25°	1243.9	1254.3	1267.3	1288.1	1292.0
27.5°	1206.2	1215.3	1232.2	1254.3	1259.5
30°	1162.0	1176.3	1197.1	1219.2	1224.4
32.5°	1119.1	1133.4	1158.1	1181.5	1188.0
35°	1074.9	1087.9	1113.9	1141.2	1149.0
37.5°	1024.2	1041.1	1069.7	1097.0	1104.8
40°	970.9	991.7	1024.2	1052.8	1061.9
42.5°	920.2	942.3	974.8	1006.0	1016.4
45°	866.9	887.7	926.7	961.8	969.6
47.5°	812.4	835.8	877.3	912.4	925.4
50°	757.8	782.5	826.7	863.0	870.8
52.5°	703.2	729.2	776.0	815.0	818.9
55°	646.0	674.6	724.0	761.7	769.5
57.5°	594.0	618.7	672.0	711.0	720.1
60°	536.8	564.1	621.3	657.7	669.4
62.5°	482.2	510.8	570.6	607.0	617.4
65°	425.0	457.5	516.0	558.9	569.3
67.5°	375.6	406.8	469.2	510.8	521.2
70°	318.4	353.5	419.8	462.7	473.1
72.5°	269.1	305.4	371.7	413.3	428.9
75°	215.8	257.4	323.6	367.8	378.2
77.5°	163.8	211.9	279.5	313.2	313.2
80°	117.0	167.7	230.1	245.7	248.3
82.5°	76.7	126.1	170.3	169.0	169.0
85°	44.2	81.9	101.4	98.8	98.8
87.5°	16.9	33.8	36.4	36.4	35.1
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)