

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P313497

Luminaire Tested: **24FCZ2-35-UNV-L83050-RDP-CA125-W2A-U-4000K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

**Test Information**

Test Method: LM-79-08  
Report Number: P313497  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-19)  
Test Lab: INNOVATION CENTER(G3)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: 24FCZ2-35-UNV-L83050-RDP-CA125-W2A-U-4000K  
Description: 2'X4' TROFFER LED MODULE, SMOOTH LENS WITH INSERT, 0.125" ACRYLIC SHEET  
Light Source: (168) 4000K TUNABLE CCT, 80 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER  
Luminaire Equipment: 

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2288.0 lumens  
Efficiency: N/A  
Efficacy: 80.0 lumens/watt  
Spacing Criteria (0/90/45): 1.26 / 1.3 / 1.41  
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 28.6  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P313497

CATALOG NUMBER: 24FCZ2-35-UNV-L83050-RDP-CA125-W2A-U-4000K

### Luminous Intensity Polar Plot

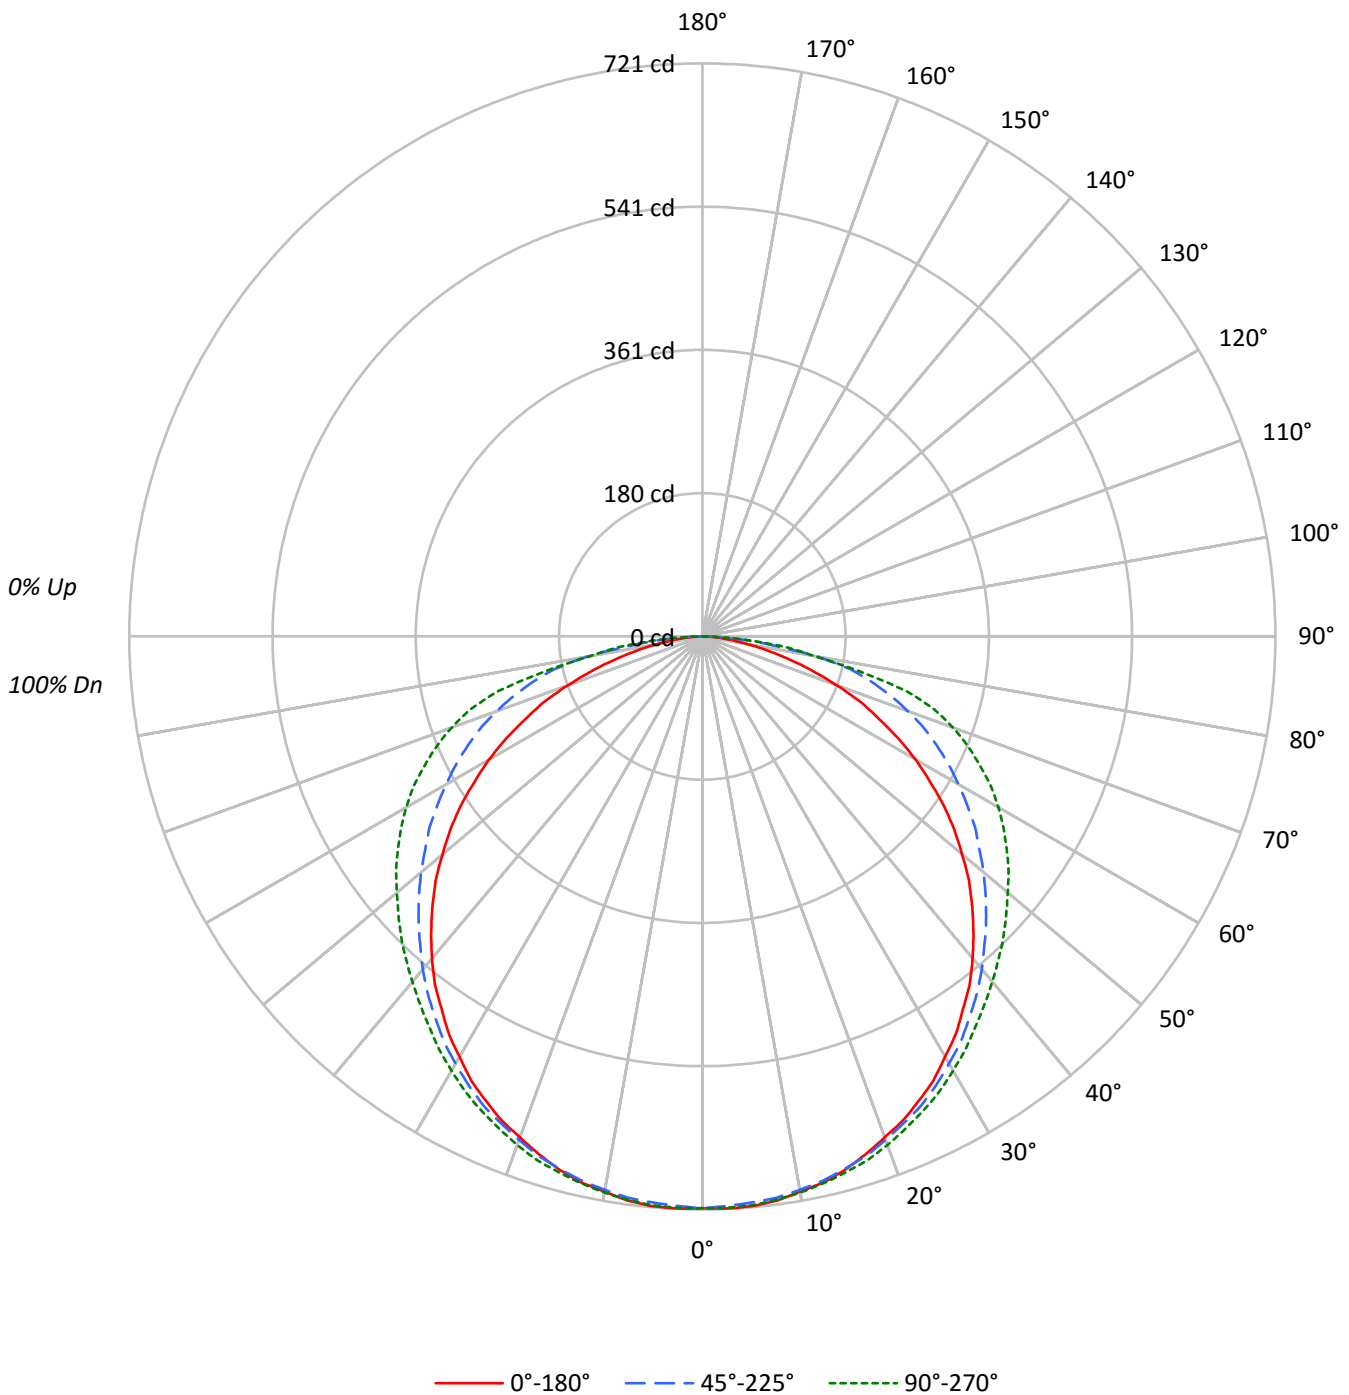



TEST NUMBER: P313497

CATALOG NUMBER: 24FCZ2-35-UNV-L83050-RDP-CA125-W2A-U-4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	98	94	105	100	96	92	96	93	89	92	89	87	88	86	84	82
2	97	89	81	75	95	87	80	74	83	77	72	80	75	71	77	73	69	67
3	88	77	68	62	86	76	68	61	72	66	60	70	64	59	67	62	58	56
4	81	68	59	52	78	67	58	51	64	57	51	62	55	50	59	54	49	47
5	74	60	51	44	72	59	51	44	57	49	43	55	48	43	53	47	42	40
6	68	54	45	38	66	53	45	38	51	44	38	50	43	37	48	42	37	35
7	63	49	40	34	61	48	40	34	47	39	33	45	38	33	44	38	33	31
8	59	45	36	30	57	44	36	30	43	35	30	41	34	29	40	34	29	27
9	55	41	33	27	53	40	32	27	39	32	27	38	31	26	37	31	26	24
10	51	38	30	24	50	37	29	24	36	29	24	35	29	24	34	28	24	22

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	968	968	968
5°	972	966	970
10°	969	966	971
15°	967	966	972
20°	960	965	975
25°	957	967	977
30°	949	964	980
35°	940	962	984
40°	929	961	997
45°	914	961	1019
50°	893	967	1050
55°	871	982	1097
60°	834	1002	1157
65°	780	1037	1229
70°	710	1085	1321
75°	602	1145	1381
80°	475	1152	1117
85°	350	875	982



TEST NUMBER: P313497

CATALOG NUMBER: 24FCZ2-35-UNV-L83050-RDP-CA125-W2A-U-4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	68.3	3.0
10°-20°	196.4	8.6
20°-30°	300.4	13.1
30°-40°	367.2	16.0
40°-50°	391.4	17.1
50°-60°	374.2	16.4
60°-70°	317.0	13.9
70°-80°	213.0	9.3
80°-90°	60.1	2.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	565.1	24.7
0°-40°	932.3	40.7
0°-60°	1697.9	74.2
0°-90°	2288.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2288.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	720	720	720	720	720	
5°	720	718	715	718	718	68
15°	694	694	693	699	698	196
25°	645	647	651	657	658	297
35°	572	576	586	597	599	358
45°	480	488	505	527	536	370
55°	371	385	419	452	468	331
65°	245	270	326	369	386	243
75°	116	158	220	258	266	124
85°	23	46	57	61	64	28
90°	0	0	0	0	0	



TEST NUMBER: P313497

CATALOG NUMBER: 24FCZ2-35-UNV-L83050-RDP-CA125-W2A-U-4000K

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	719.5	719.5	719.5	719.5	719.5
2.5°	720.6	720.6	717.2	719.5	719.5
5°	719.5	718.4	715.0	718.4	718.4
7.5°	716.1	715.0	712.7	716.1	715.0
10°	709.3	709.3	707.0	710.4	710.4
12.5°	703.6	702.5	701.4	705.9	704.8
15°	694.5	694.5	693.4	699.1	697.9
17.5°	683.2	684.3	685.5	690.0	691.1
20°	670.7	673.0	674.1	680.9	680.9
22.5°	659.4	660.5	662.8	669.6	669.6
25°	644.6	646.9	651.4	657.1	658.2
27.5°	629.9	631.0	636.7	644.6	645.7
30°	610.6	614.0	620.8	629.9	631.0
32.5°	593.5	596.9	604.9	614.0	616.2
35°	572.0	576.5	585.6	596.9	599.2
37.5°	552.7	556.1	567.4	579.9	583.3
40°	528.9	535.7	547.0	561.8	567.4
42.5°	505.0	511.8	525.4	544.7	551.5
45°	480.1	488.0	505.0	526.6	535.7
47.5°	455.1	464.2	483.5	508.4	518.6
50°	426.7	438.1	461.9	490.3	501.6
52.5°	399.5	413.1	439.2	471.0	485.7
55°	371.1	384.7	418.8	451.7	467.6
57.5°	339.3	357.5	394.9	432.4	449.4
60°	309.8	326.8	372.2	413.1	430.1
62.5°	278.0	300.7	349.5	392.7	409.7
65°	245.1	270.1	325.7	368.8	385.9
67.5°	215.6	242.9	301.9	345.0	362.0
70°	180.4	214.5	275.8	318.9	335.9
72.5°	147.5	185.0	248.5	290.5	306.4
75°	115.8	157.7	220.2	257.6	265.6
77.5°	86.3	130.5	190.7	206.5	200.9
80°	61.3	104.4	148.7	140.7	144.1
82.5°	39.7	79.4	91.9	104.4	107.8
85°	22.7	46.5	56.7	61.3	63.6
87.5°	10.2	17.0	22.7	22.7	21.6
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)