

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581618

Luminaire Tested: **HC610D010-HM60525840-61WDWB**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P581618
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-10)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC610D010-HM60525840-61WDWB
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, WHITE BAFFLE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1287.4 lumens
Efficiency: N/A
Efficacy: 130.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.05
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P581618

CATALOG NUMBER: HC610D010-HM60525840-61WDWB

Luminous Intensity Polar Plot

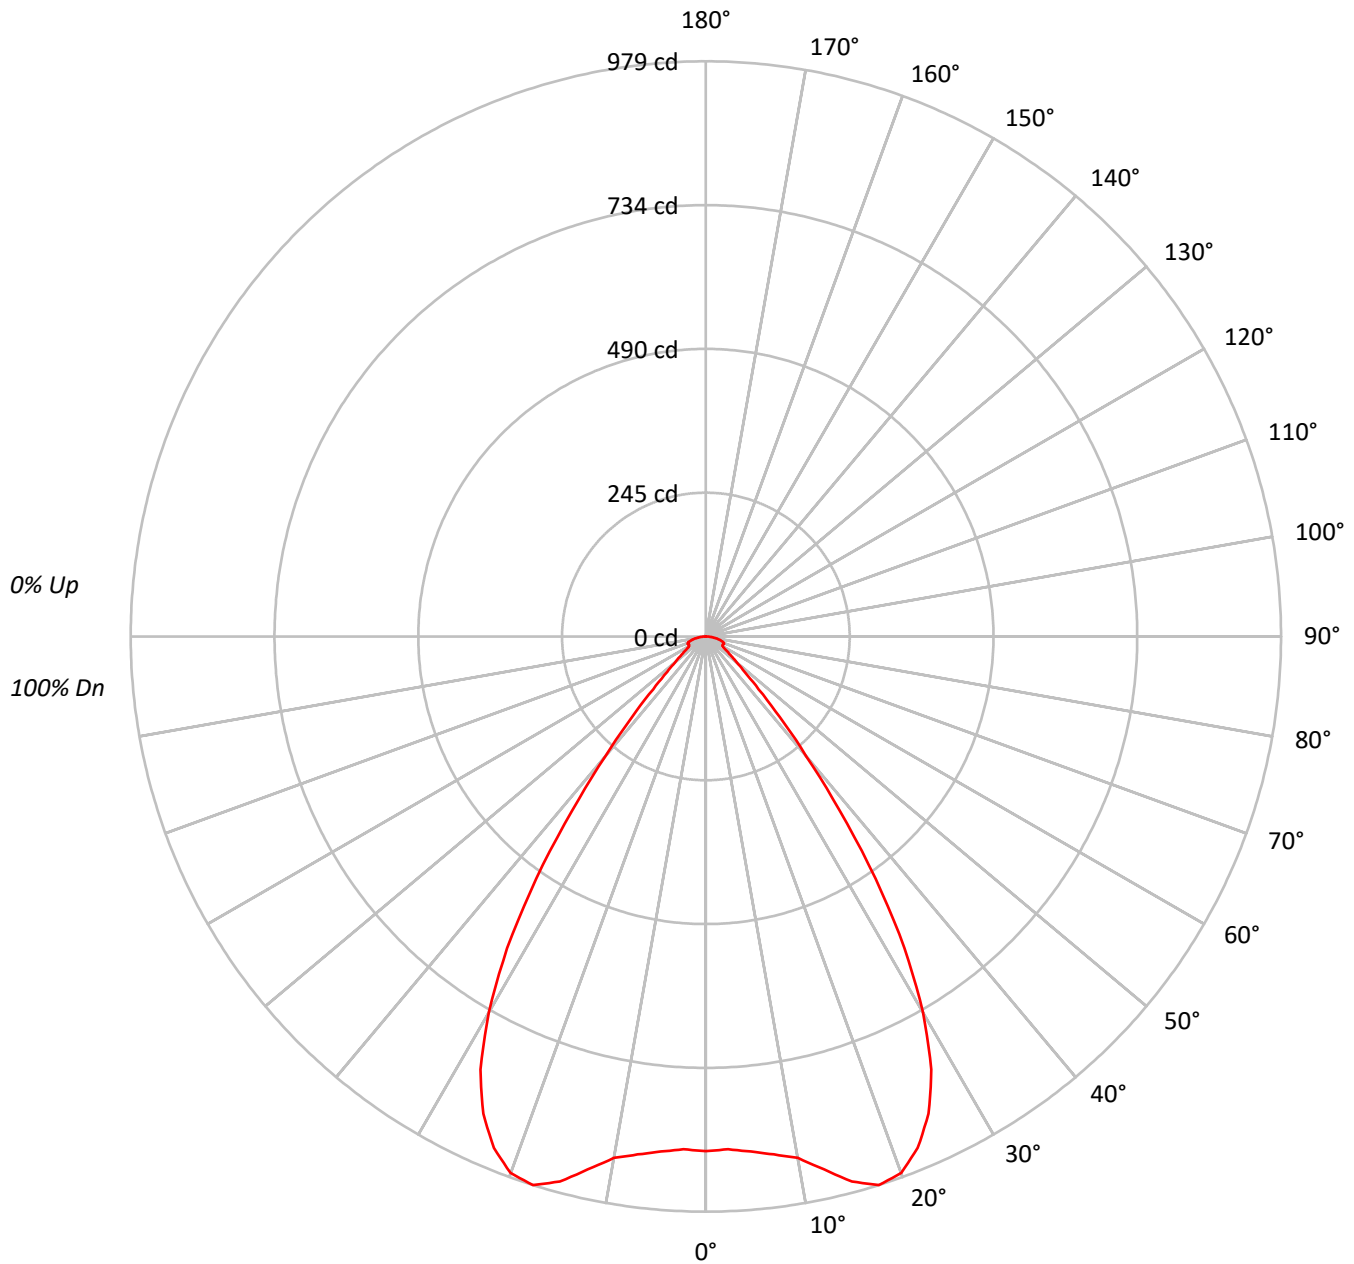



TEST NUMBER: P581618

CATALOG NUMBER: HC610D010-HM60525840-61WDWB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	102	103	100	98		99	97	95		95
2	106	100	95	91	103	98	94	90	95	91	88		92	89	86		89
3	99	92	86	81	97	90	85	81	88	83	79		85	81	78		83
4	93	85	78	73	91	83	78	73	81	76	72		79	75	71		77
5	88	78	72	67	86	77	71	66	75	70	66		74	69	65		72
6	83	73	66	61	81	72	66	61	70	65	60		69	64	60		67
7	78	68	61	56	77	67	61	56	66	60	56		64	59	55		63
8	74	63	57	52	73	63	56	52	61	56	52		60	55	51		59
9	70	59	53	48	69	59	52	48	58	52	48		57	51	48		56
10	66	56	49	45	65	55	49	45	54	48	45		53	48	44		53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	48017
5°	48426
10°	50172
15°	54501
20°	56687
25°	54221
30°	46792
35°	33696
40°	18978
45°	9838
50°	5859
55°	4234
60°	3585
65°	4138
70°	5241
75°	5528
80°	5430
85°	5158



TEST NUMBER: P581618

CATALOG NUMBER: HC610D010-HM60525840-61WDWB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	84.7	6.6
10°-20°	270.8	21.0
20°-30°	404.8	31.4
30°-40°	309.4	24.0
40°-50°	108.1	8.4
50°-60°	41.2	3.2
60°-70°	32.3	2.5
70°-80°	27.3	2.1
80°-90°	8.8	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	760.3	59.1
0°-40°	1069.8	83.1
0°-60°	1219.0	94.7
0°-90°	1287.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1287.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	876	
5°	880	85
15°	960	271
25°	896	405
35°	504	309
45°	127	108
55°	44	41
65°	32	32
75°	26	27
85°	8	9
90°	0	



TEST NUMBER: P581618

CATALOG NUMBER: HC610D010-HM60525840-61WDWB

CANDELA DISTRIBUTION (FULL):

	0°
0°	875.9
2.5°	873.5
5°	880.0
7.5°	889.1
10°	901.3
12.5°	929.1
15°	960.3
17.5°	979.1
20°	971.7
22.5°	942.3
25°	896.4
27.5°	830.9
30°	739.2
32.5°	629.5
35°	503.5
37.5°	373.3
40°	265.2
42.5°	185.9
45°	126.9
47.5°	89.2
50°	68.7
52.5°	54.0
55°	44.3
57.5°	36.0
60°	32.7
62.5°	31.9
65°	31.9
67.5°	33.6
70°	32.7
72.5°	30.3
75°	26.1
77.5°	22.1
80°	17.2
82.5°	12.2
85°	8.2
87.5°	3.3
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)