

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581716

Luminaire Tested: **HC615D010-HM60525830-61NDC**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P581716
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-1)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC615D010-HM60525830-61NDC
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" NARROW DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1624.0 lumens
Efficiency: N/A
Efficacy: 116.0 lumens/watt
Spacing Criteria (0/90/45): 0.93 / 0.93 / 0.88
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 14
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P581716

CATALOG NUMBER: HC615D010-HM60525830-61NDC

Luminous Intensity Polar Plot

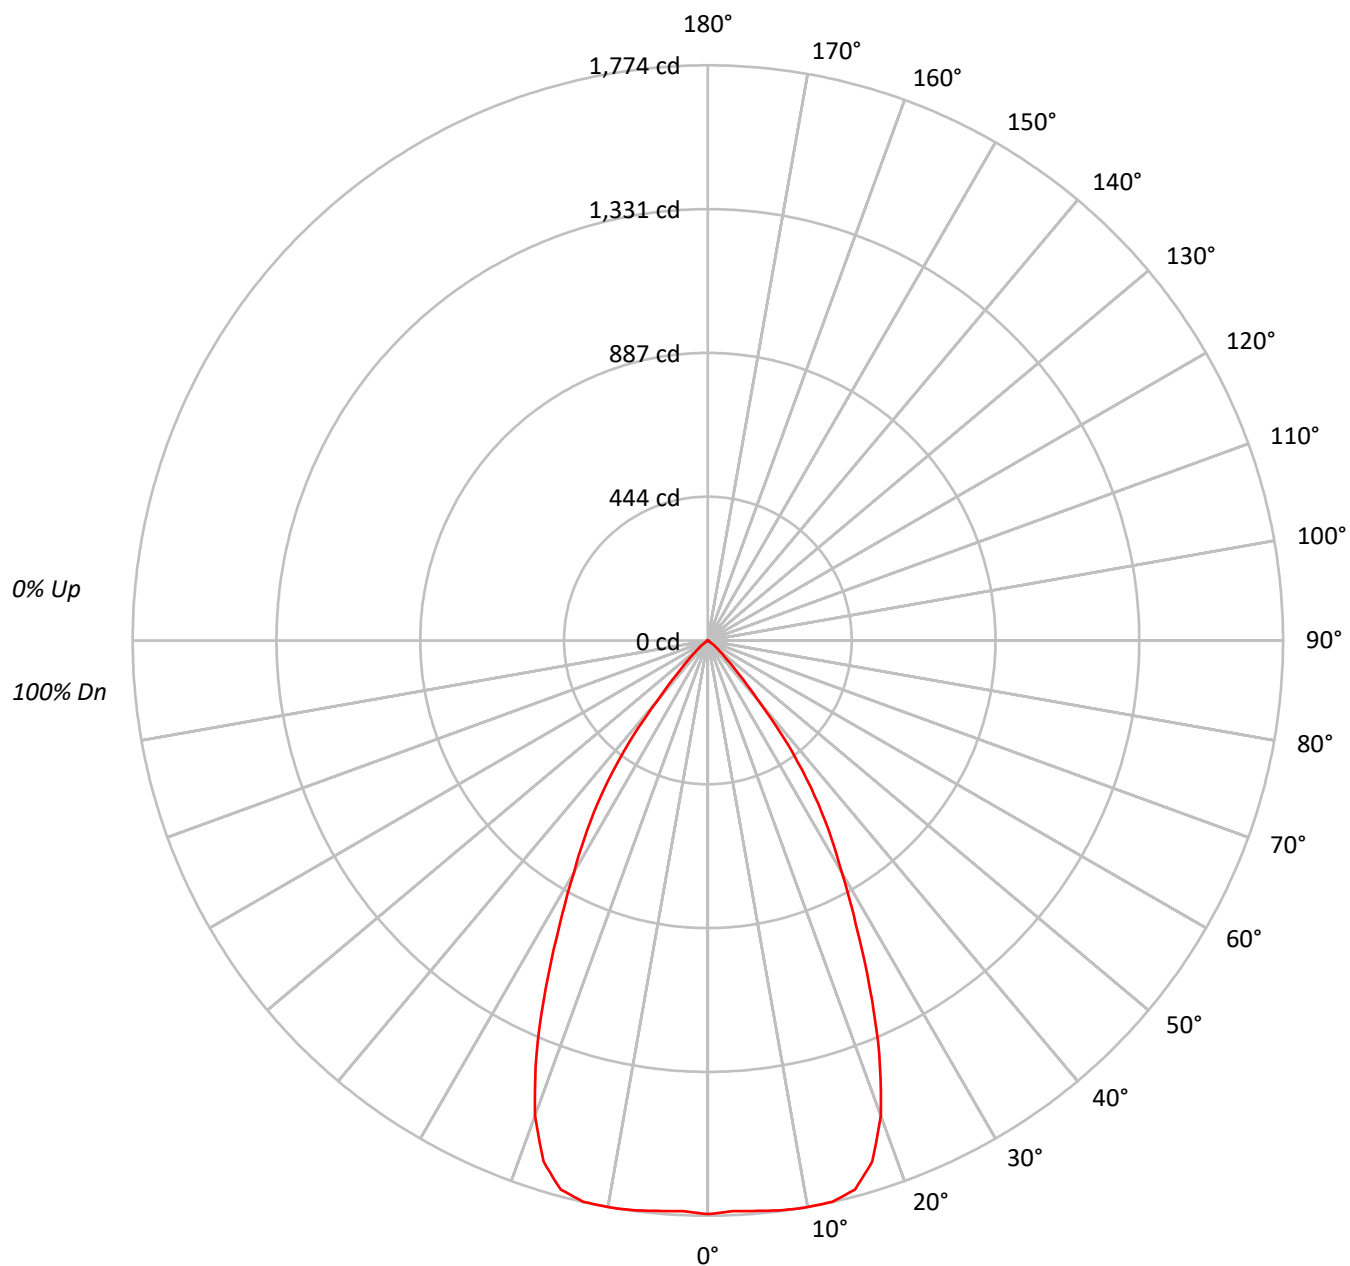



TEST NUMBER: P581716

CATALOG NUMBER: HC615D010-HM60525830-61NDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	107	105	105	103	101		101	100	98		98
2	108	103	99	96	106	102	98	95	98	96	93		96	93	91		93
3	103	97	92	88	101	95	91	87	93	89	86		90	87	84		88
4	98	90	85	81	96	89	84	80	87	83	79		85	81	79		83
5	93	85	79	75	91	84	79	75	82	77	74		80	76	73		79
6	88	80	74	70	87	79	73	69	77	73	69		76	72	68		75
7	84	75	69	65	83	74	69	65	73	68	64		72	67	64		71
8	80	71	65	61	79	70	65	61	69	64	60		68	64	60		67
9	76	67	61	57	75	66	61	57	65	60	57		65	60	57		64
10	73	63	58	54	72	63	57	54	62	57	54		61	57	53		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	96982
5°	97177
10°	98779
15°	99501
20°	90950
25°	71466
30°	52318
35°	37116
40°	17554
45°	6698
50°	3002
55°	812
60°	351
65°	285
70°	160
75°	212
80°	0
85°	0



TEST NUMBER: P581716

CATALOG NUMBER: HC615D010-HM60525830-61NDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	168.9	10.4
10°-20°	484.6	29.8
20°-30°	539.0	33.2
30°-40°	336.7	20.7
40°-50°	80.0	4.9
50°-60°	11.5	0.7
60°-70°	2.4	0.1
70°-80°	0.9	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1192.5	73.4
0°-40°	1529.2	94.2
0°-60°	1620.7	99.8
0°-90°	1624.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1624.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1769	
5°	1766	169
15°	1753	485
25°	1182	539
35°	555	337
45°	86	80
55°	8	11
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P581716

CATALOG NUMBER: HC615D010-HM60525830-61NDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	1769.1
2.5°	1761.7
5°	1765.9
7.5°	1772.4
10°	1774.5
12.5°	1773.4
15°	1753.2
17.5°	1684.9
20°	1559.0
22.5°	1382.1
25°	1181.5
27.5°	989.6
30°	826.5
32.5°	691.0
35°	554.6
37.5°	407.4
40°	245.3
42.5°	141.9
45°	86.4
47.5°	55.5
50°	35.2
52.5°	20.3
55°	8.5
57.5°	4.3
60°	3.2
62.5°	3.2
65°	2.2
67.5°	2.2
70°	1.0
72.5°	1.0
75°	1.0
77.5°	1.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)