

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581789

Luminaire Tested: **HC615D010-HM60525930-61NDH**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P581789
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-2)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC615D010-HM60525930-61NDH
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" NARROW DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1327.1 lumens
Efficiency: N/A
Efficacy: 94.8 lumens/watt
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.89
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 14
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P581789

CATALOG NUMBER: HC615D010-HM60525930-61NDH

Luminous Intensity Polar Plot

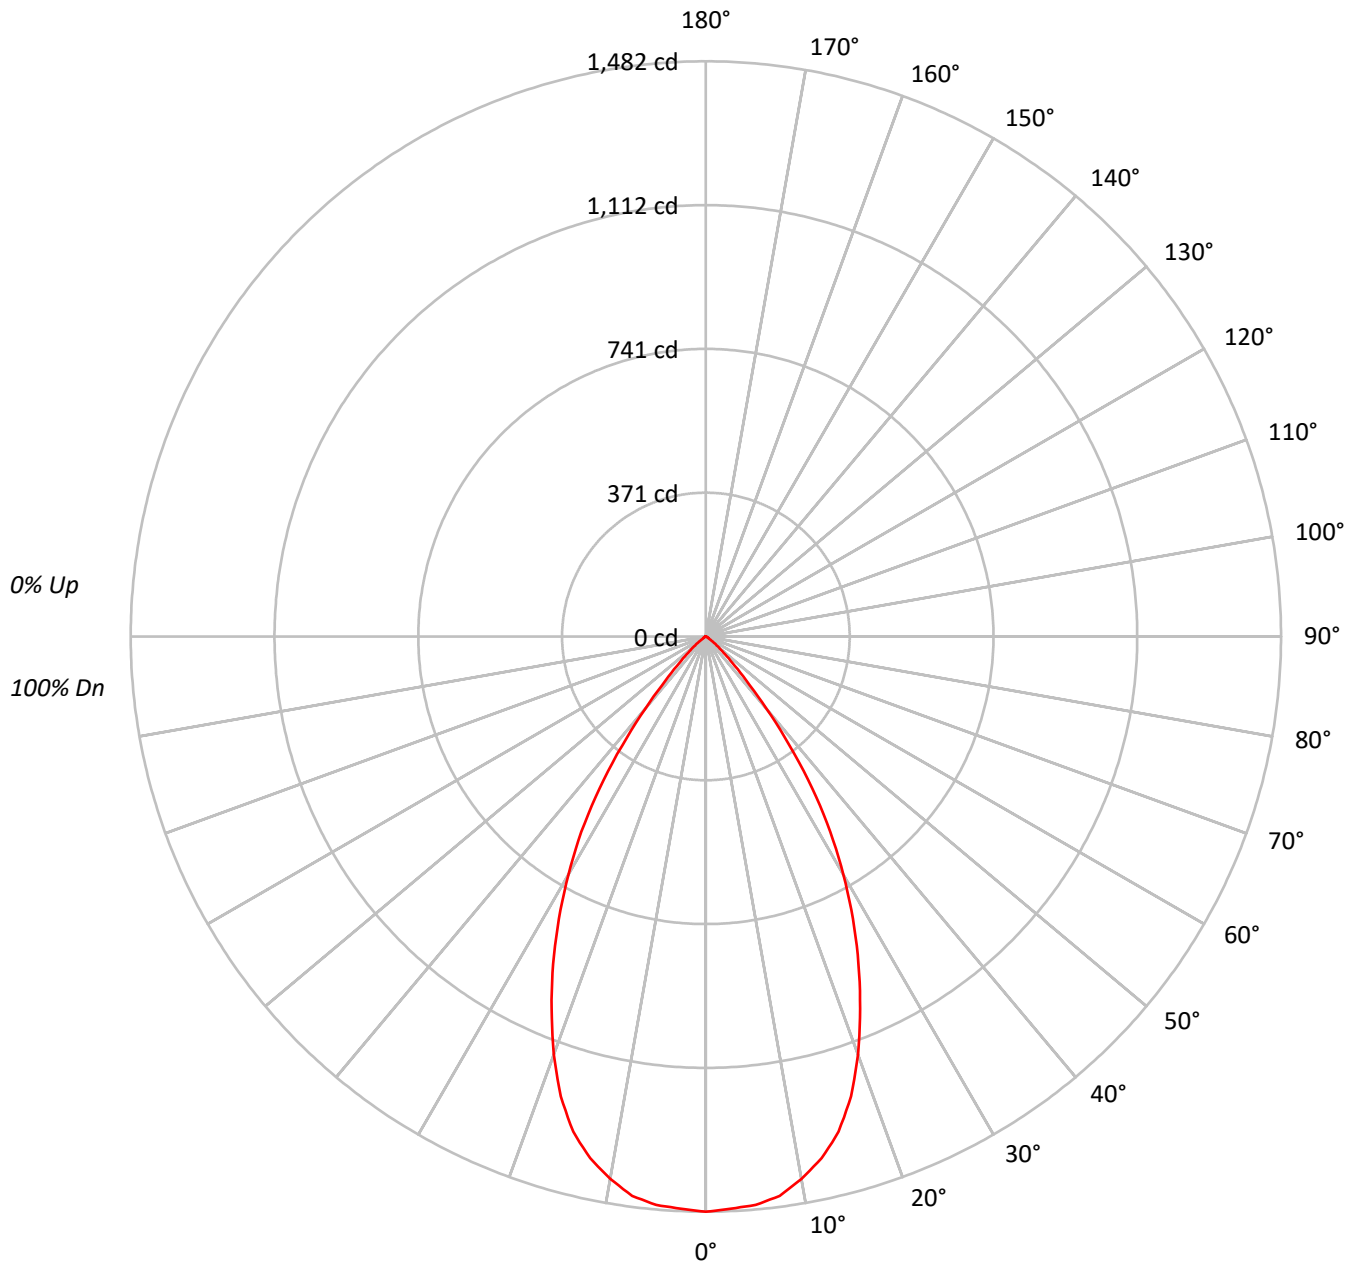



TEST NUMBER: P581789

CATALOG NUMBER: HC615D010-HM60525930-61NDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	111	108	106	111	109	106	104	105	103	101		101	99	98		97
2	108	103	99	96	106	101	98	94	98	95	92		95	93	90		92
3	102	96	91	87	100	95	90	86	92	88	85		90	86	84		87
4	97	90	84	80	95	88	83	79	86	82	78		84	81	78		82
5	92	84	78	74	91	83	77	73	81	76	73		79	75	72		78
6	88	79	73	68	86	78	72	68	76	71	68		75	71	67		74
7	83	74	68	64	82	73	68	63	72	67	63		71	66	63		70
8	79	70	64	59	78	69	63	59	68	63	59		67	62	59		66
9	75	66	60	56	74	65	59	56	64	59	55		63	59	55		62
10	72	62	56	52	71	62	56	52	61	56	52		60	55	52		59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	81249
5°	80904
10°	78990
15°	74978
20°	66832
25°	56296
30°	44855
35°	32003
40°	17211
45°	7373
50°	3352
55°	1223
60°	592
65°	467
70°	433
75°	191
80°	284
85°	0



TEST NUMBER: P581789

CATALOG NUMBER: HC615D010-HM60525930-61NDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	138.8	10.5
10°-20°	366.2	27.6
20°-30°	424.2	32.0
30°-40°	293.3	22.1
40°-50°	84.7	6.4
50°-60°	14.5	1.1
60°-70°	3.7	0.3
70°-80°	1.4	0.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	929.1	70.0
0°-40°	1222.4	92.1
0°-60°	1321.7	99.6
0°-90°	1327.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1327.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1482	
5°	1470	139
15°	1321	366
25°	931	424
35°	478	293
45°	95	85
55°	13	15
65°	4	4
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P581789

CATALOG NUMBER: HC615D010-HM60525930-61NDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1482.1
2.5°	1475.6
5°	1470.2
7.5°	1453.7
10°	1419.0
12.5°	1376.9
15°	1321.1
17.5°	1242.5
20°	1145.6
22.5°	1038.6
25°	930.7
27.5°	820.2
30°	708.6
32.5°	597.0
35°	478.2
37.5°	354.7
40°	240.5
42.5°	151.7
45°	95.1
47.5°	61.3
50°	39.3
52.5°	23.7
55°	12.8
57.5°	7.3
60°	5.4
62.5°	4.5
65°	3.6
67.5°	2.7
70°	2.7
72.5°	1.8
75°	0.9
77.5°	0.9
80°	0.9
82.5°	0.9
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)