

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581822

Luminaire Tested: **HC615D010-HM60525940-61MDH**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P581822
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC615D010-HM60525940-61MDH
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1380.6 lumens
Efficiency: N/A
Efficacy: 98.6 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 0.97
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 14
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P581822

CATALOG NUMBER: HC615D010-HM60525940-61MDH

Luminous Intensity Polar Plot

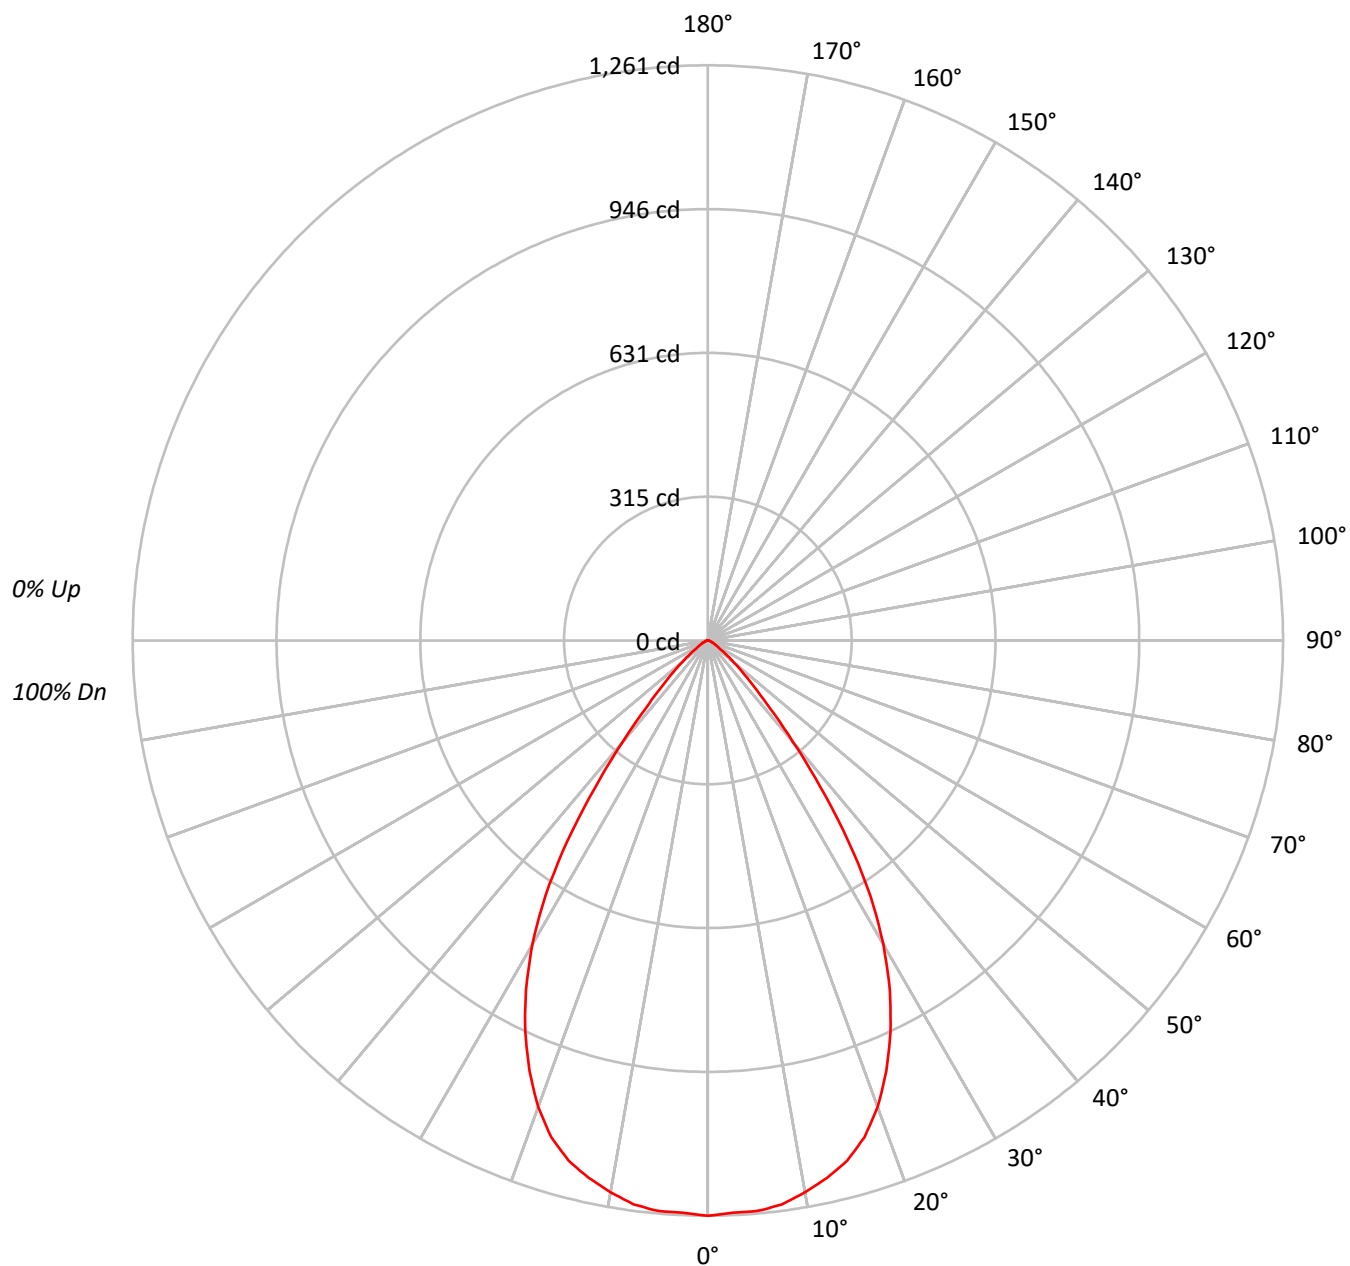



TEST NUMBER: P581822

CATALOG NUMBER: HC615D010-HM60525940-61MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	83		88	84	81		86
4	96	88	82	77	94	86	81	77	84	79	76		82	78	75		80
5	90	81	75	71	89	80	75	70	79	74	70		77	73	69		75
6	85	76	70	65	84	75	69	65	74	68	64		72	67	64		71
7	81	71	65	60	79	70	64	60	69	64	60		68	63	59		67
8	77	67	60	56	75	66	60	56	65	59	55		64	59	55		63
9	73	62	56	52	72	62	56	52	61	56	52		60	55	52		59
10	69	59	53	49	68	58	52	48	57	52	48		57	52	48		56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	69145
5°	69090
10°	68369
15°	66992
20°	63466
25°	57312
30°	48685
35°	35944
40°	20782
45°	11032
50°	6234
55°	3269
60°	2138
65°	1518
70°	1090
75°	826
80°	600
85°	629



TEST NUMBER: P581822

CATALOG NUMBER: HC615D010-HM60525940-61MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	119.0	8.6
10°-20°	330.2	23.9
20°-30°	430.9	31.2
30°-40°	329.3	23.9
40°-50°	119.2	8.6
50°-60°	34.6	2.5
60°-70°	12.4	0.9
70°-80°	4.3	0.3
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	880.1	63.7
0°-40°	1209.4	87.6
0°-60°	1363.2	98.7
0°-90°	1380.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1380.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1261	
5°	1256	119
15°	1180	330
25°	948	431
35°	537	329
45°	142	119
55°	34	35
65°	12	12
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P581822

CATALOG NUMBER: HC615D010-HM60525940-61MDH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1261.3
2.5°	1255.5
5°	1255.5
7.5°	1246.7
10°	1228.2
12.5°	1206.7
15°	1180.4
17.5°	1141.5
20°	1087.9
22.5°	1021.6
25°	947.5
27.5°	863.6
30°	769.1
32.5°	662.8
35°	537.1
37.5°	405.5
40°	290.4
42.5°	200.8
45°	142.3
47.5°	102.4
50°	73.1
52.5°	51.6
55°	34.2
57.5°	24.4
60°	19.5
62.5°	15.5
65°	11.7
67.5°	9.8
70°	6.8
72.5°	4.9
75°	3.9
77.5°	3.0
80°	1.9
82.5°	1.0
85°	1.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)