

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581832

Luminaire Tested: **HC615D010-HM60525940-61WDH**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P581832
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-8)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC615D010-HM60525940-61WDH
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1441.0 lumens
Efficiency: N/A
Efficacy: 102.9 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.08
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 14
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P581832

CATALOG NUMBER: HC615D010-HM60525940-61WDH

Luminous Intensity Polar Plot

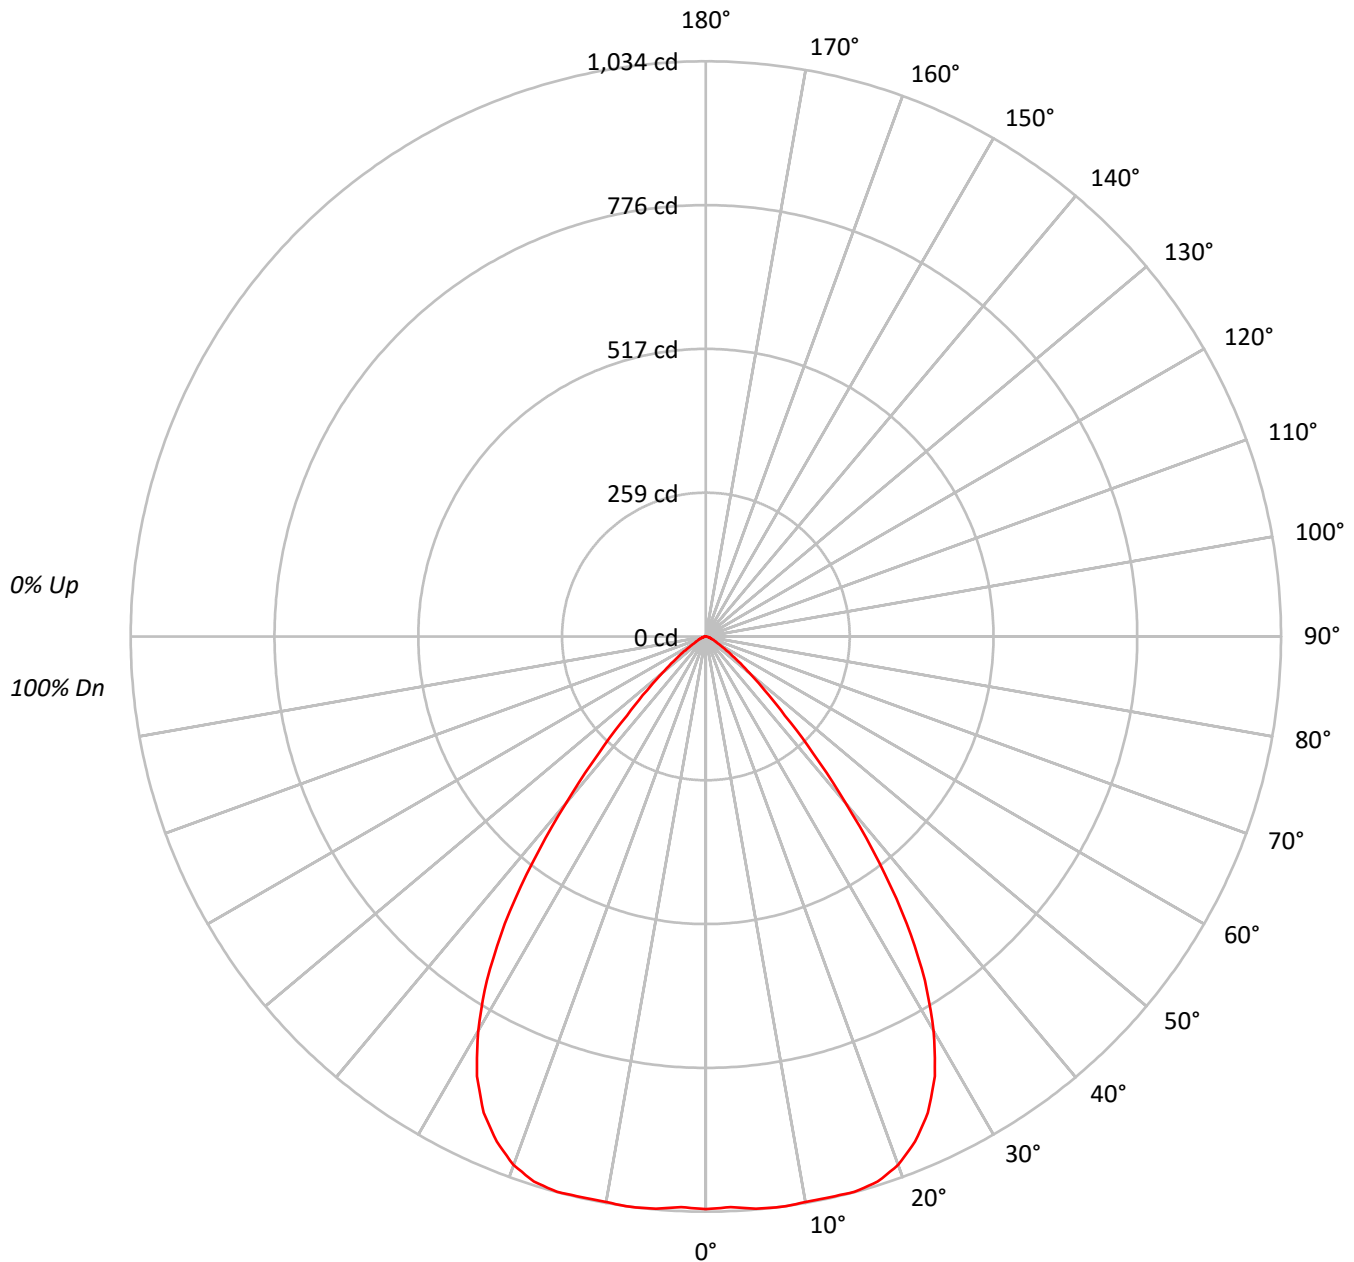



TEST NUMBER: P581832

CATALOG NUMBER: HC615D010-HM60525940-61WDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	107	105		110	108	105	103		103	101	100		100	98	97		96	95	94
2	106	101	96	93		104	99	95	92		96	92	90		93	90	88		90	88	86
3	100	93	87	83		98	91	86	82		89	84	81		86	83	80		84	81	78
4	94	86	79	75		92	85	79	74		82	77	73		80	76	73		78	75	72
5	89	79	73	68		87	78	72	68		76	71	67		75	70	66		73	69	66
6	83	73	67	62		82	73	66	62		71	65	61		70	65	61		68	64	60
7	79	68	62	57		77	68	61	57		66	60	56		65	60	56		64	59	56
8	74	64	57	52		73	63	57	52		62	56	52		61	56	52		60	55	51
9	70	59	53	48		69	59	53	48		58	52	48		57	52	48		56	51	48
10	66	56	49	45		65	55	49	45		54	49	45		53	48	45		53	48	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	56432
5°	56813
10°	57469
15°	58650
20°	58974
25°	57142
30°	51837
35°	42148
40°	27974
45°	15568
50°	8733
55°	4846
60°	2675
65°	2011
70°	1394
75°	1038
80°	600
85°	629



TEST NUMBER: P581832

CATALOG NUMBER: HC615D010-HM60525940-61WDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.5	6.8
10°-20°	291.4	20.2
20°-30°	429.5	29.8
30°-40°	384.1	26.7
40°-50°	166.7	11.6
50°-60°	49.0	3.4
60°-70°	15.6	1.1
70°-80°	5.5	0.4
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	819.4	56.9
0°-40°	1203.5	83.5
0°-60°	1419.1	98.5
0°-90°	1441.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1441.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1029	
5°	1032	99
15°	1033	291
25°	945	429
35°	630	384
45°	201	167
55°	51	49
65°	16	16
75°	5	6
85°	1	1
90°	0	



TEST NUMBER: P581832

CATALOG NUMBER: HC615D010-HM60525940-61WDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1029.4
2.5°	1026.6
5°	1032.4
7.5°	1034.3
10°	1032.4
12.5°	1032.4
15°	1033.4
17.5°	1027.5
20°	1010.9
22.5°	982.7
25°	944.7
27.5°	891.1
30°	818.9
32.5°	733.1
35°	629.8
37.5°	511.8
40°	390.9
42.5°	285.7
45°	200.8
47.5°	143.4
50°	102.4
52.5°	73.1
55°	50.7
57.5°	34.2
60°	24.4
62.5°	19.5
65°	15.5
67.5°	11.7
70°	8.7
72.5°	6.8
75°	4.9
77.5°	3.9
80°	1.9
82.5°	1.0
85°	1.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)