

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581904

Luminaire Tested: **HC620D010-HM60525840-61WDH**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P581904
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-8)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC620D010-HM60525840-61WDH
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2233.0 lumens
Efficiency: N/A
Efficacy: 111.7 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.08
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 20
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P581904

CATALOG NUMBER: HC620D010-HM60525840-61WDH

Luminous Intensity Polar Plot

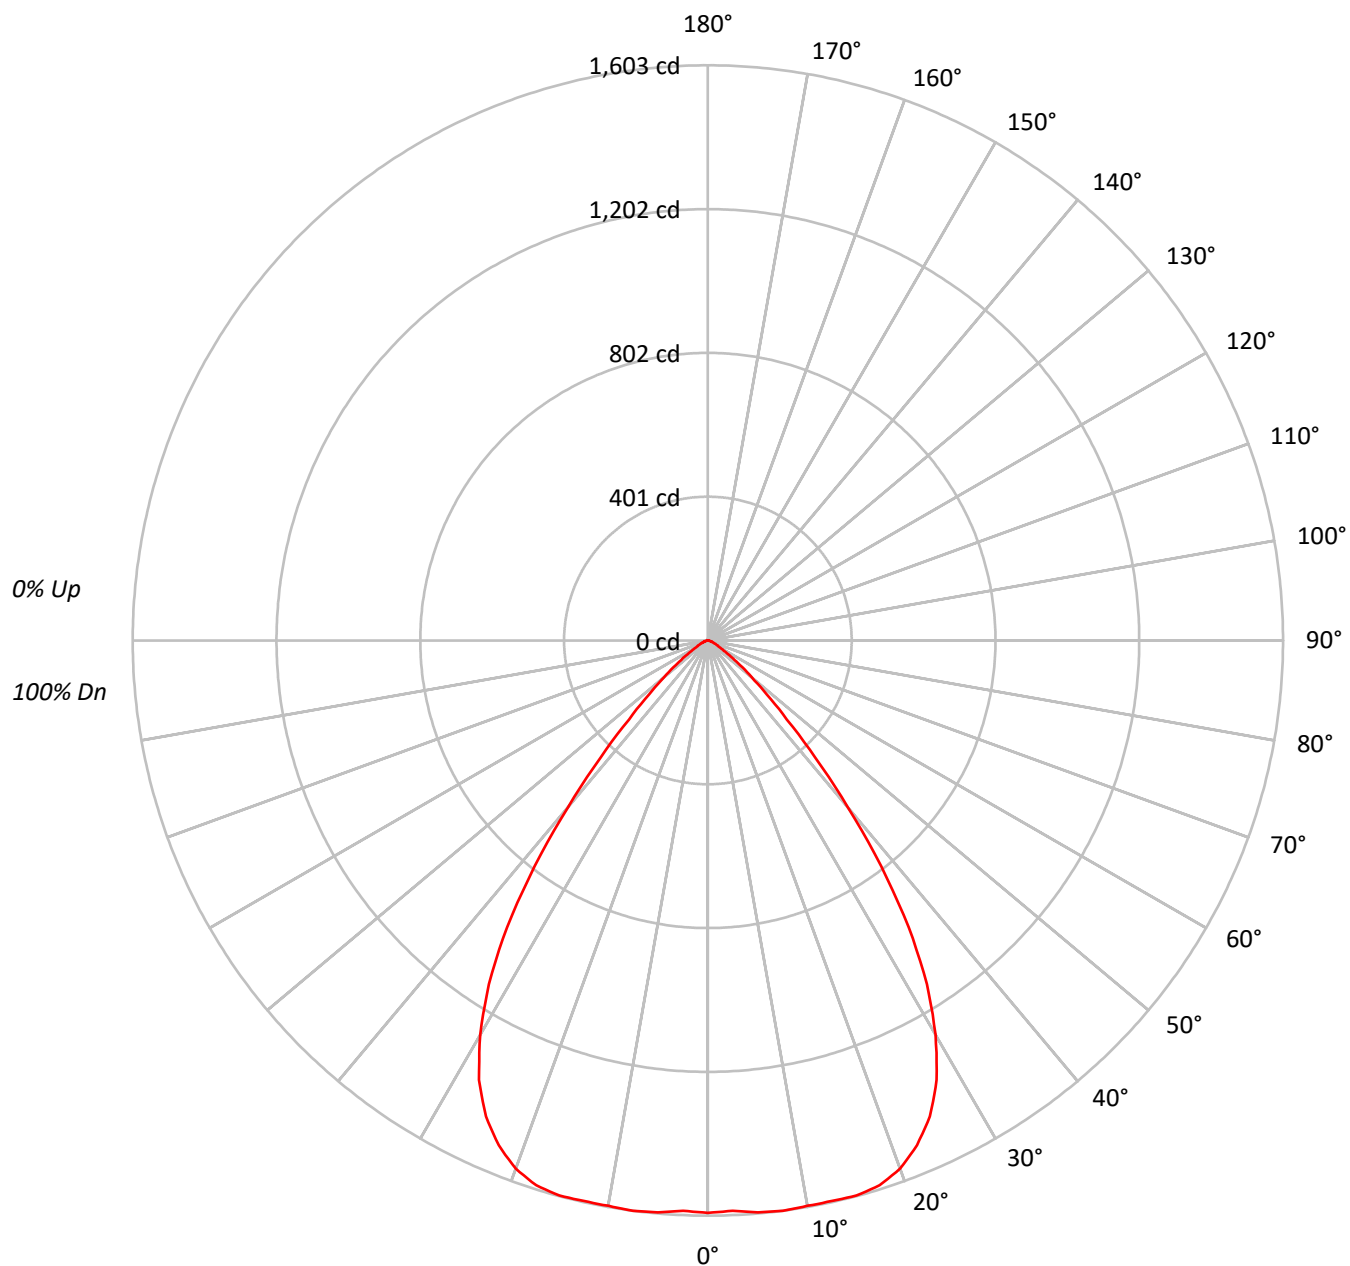



TEST NUMBER: P581904

CATALOG NUMBER: HC620D010-HM60525840-61WDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	107	105		110	108	105	103		103	101	100		100	98	97		96	95	94
2	106	101	96	93		104	99	95	92		96	92	90		93	90	88		90	88	86
3	100	93	87	83		98	91	86	82		89	84	81		86	83	80		84	81	78
4	94	86	79	75		92	85	79	74		82	77	73		80	76	73		78	75	72
5	89	79	73	68		87	78	72	68		76	71	67		75	70	66		73	69	66
6	83	73	67	62		82	73	66	62		71	65	61		70	65	61		68	64	60
7	79	68	62	57		77	68	61	57		66	60	56		65	60	56		64	59	56
8	74	64	57	52		73	63	57	52		62	56	52		61	56	52		60	55	51
9	70	59	53	48		69	59	53	48		58	52	48		57	52	48		56	51	48
10	66	56	49	45		65	55	49	45		54	49	45		53	48	45		53	48	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	87455
5°	88036
10°	89054
15°	90880
20°	91393
25°	88541
30°	80329
35°	65310
40°	43353
45°	24127
50°	13526
55°	7503
60°	4133
65°	3126
70°	2180
75°	1610
80°	979
85°	943



TEST NUMBER: P581904

CATALOG NUMBER: HC620D010-HM60525840-61WDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	152.7	6.8
10°-20°	451.5	20.2
20°-30°	665.5	29.8
30°-40°	595.2	26.7
40°-50°	258.3	11.6
50°-60°	75.9	3.4
60°-70°	24.2	1.1
70°-80°	8.5	0.4
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1269.7	56.9
0°-40°	1864.9	83.5
0°-60°	2199.0	98.5
0°-90°	2233.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2233.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1595	
5°	1600	153
15°	1601	452
25°	1464	665
35°	976	595
45°	311	258
55°	78	76
65°	24	24
75°	8	9
85°	2	1
90°	0	



TEST NUMBER: P581904

CATALOG NUMBER: HC620D010-HM60525840-61WDH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1595.3
2.5°	1590.7
5°	1599.8
7.5°	1602.9
10°	1599.8
12.5°	1599.8
15°	1601.3
17.5°	1592.2
20°	1566.6
22.5°	1522.8
25°	1463.8
27.5°	1380.8
30°	1269.0
32.5°	1136.1
35°	975.9
37.5°	793.1
40°	605.8
42.5°	442.7
45°	311.2
47.5°	222.1
50°	158.6
52.5°	113.3
55°	78.5
57.5°	52.9
60°	37.7
62.5°	30.3
65°	24.1
67.5°	18.1
70°	13.6
72.5°	10.5
75°	7.6
77.5°	6.0
80°	3.1
82.5°	1.5
85°	1.5
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)