

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P593203

Luminaire Tested: **HC630D010-HM63040850-61NDC**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P593203
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-1)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC630D010-HM63040850-61NDC
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" NARROW DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 5000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3647.1 lumens
Efficiency: N/A
Efficacy: 130.3 lumens/watt
Spacing Criteria (0/90/45): 0.93 / 0.93 / 0.88
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P593203

CATALOG NUMBER: HC630D010-HM63040850-61NDC

Luminous Intensity Polar Plot

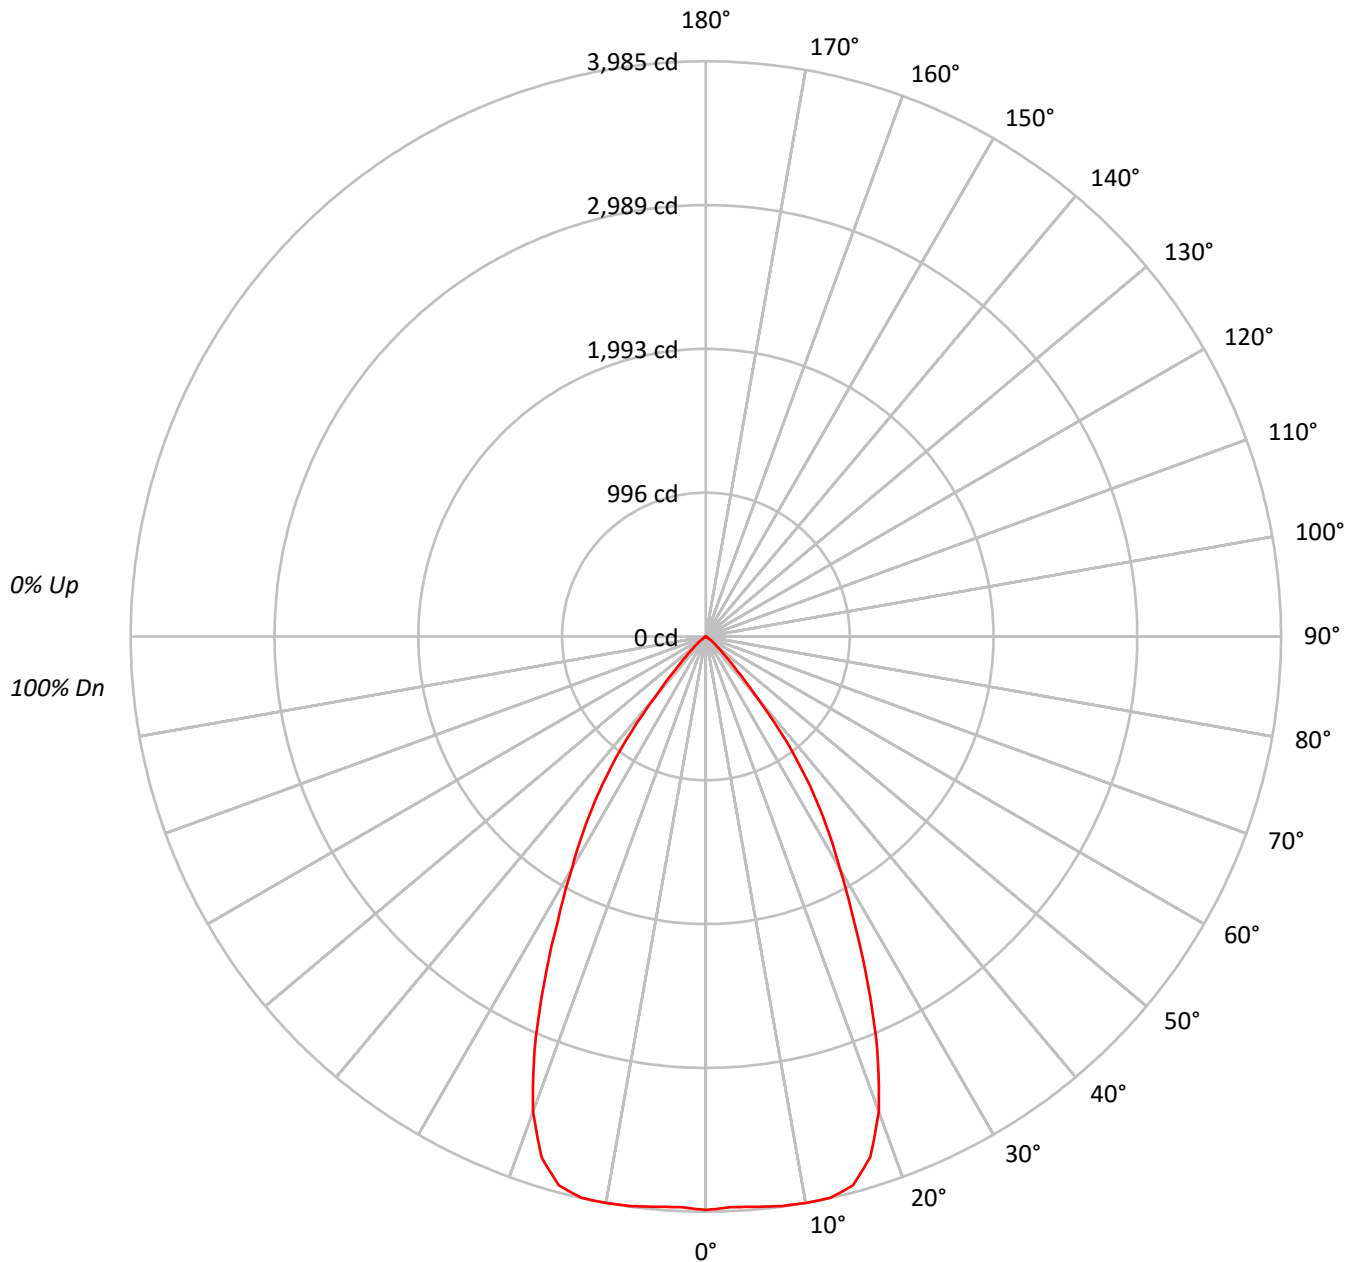



TEST NUMBER: P593203

CATALOG NUMBER: HC630D010-HM63040850-61NDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	108	106		111	109	107	105		105	103	101		101	100	98		98	97	96
2	108	103	99	96		106	102	98	95		98	96	93		96	93	91		93	91	89
3	103	97	92	88		101	95	91	87		93	89	86		90	87	84		88	85	83
4	98	90	85	81		96	89	84	80		87	83	79		85	81	79		83	80	78
5	93	85	79	75		91	84	79	75		82	77	74		80	76	73		79	75	73
6	88	80	74	70		87	79	73	69		77	73	69		76	72	68		75	71	68
7	84	75	69	65		83	74	69	65		73	68	64		72	67	64		71	67	64
8	80	71	65	61		79	70	65	61		69	64	60		68	64	60		67	63	60
9	76	67	61	57		75	66	61	57		65	60	57		65	60	57		64	60	56
10	73	63	58	54		72	63	57	54		62	57	54		61	57	53		61	56	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	217811
5°	218247
10°	221840
15°	223458
20°	204266
25°	160509
30°	117486
35°	83346
40°	39424
45°	15040
50°	6746
55°	1826
60°	778
65°	623
70°	385
75°	508
80°	0
85°	0



TEST NUMBER: P593203

CATALOG NUMBER: HC630D010-HM63040850-61NDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	379.4	10.4
10°-20°	1088.2	29.8
20°-30°	1210.5	33.2
30°-40°	756.2	20.7
40°-50°	179.7	4.9
50°-60°	25.7	0.7
60°-70°	5.3	0.1
70°-80°	2.2	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2678.1	73.4
0°-40°	3434.3	94.2
0°-60°	3639.6	99.8
0°-90°	3647.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3647.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3973	
5°	3966	379
15°	3937	1088
25°	2654	1210
35°	1245	756
45°	194	180
55°	19	26
65°	5	5
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P593203

CATALOG NUMBER: HC630D010-HM63040850-61NDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	3973.2
2.5°	3956.4
5°	3966.0
7.5°	3980.4
10°	3985.2
12.5°	3982.8
15°	3937.3
17.5°	3784.0
20°	3501.4
22.5°	3103.9
25°	2653.6
27.5°	2222.5
30°	1856.0
32.5°	1551.9
35°	1245.4
37.5°	914.8
40°	550.9
42.5°	318.5
45°	194.0
47.5°	124.5
50°	79.1
52.5°	45.5
55°	19.1
57.5°	9.6
60°	7.1
62.5°	7.1
65°	4.8
67.5°	4.8
70°	2.4
72.5°	2.4
75°	2.4
77.5°	2.4
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)