

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582698

Luminaire Tested: **HC645D010-HM64560940-61WDWB**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P582698
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-10)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC645D010-HM64560940-61WDWB
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, WHITE BAFFLE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4976.1 lumens
Efficiency: N/A
Efficacy: 113.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.05
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 44
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P582698

CATALOG NUMBER: HC645D010-HM64560940-61WDWB

Luminous Intensity Polar Plot

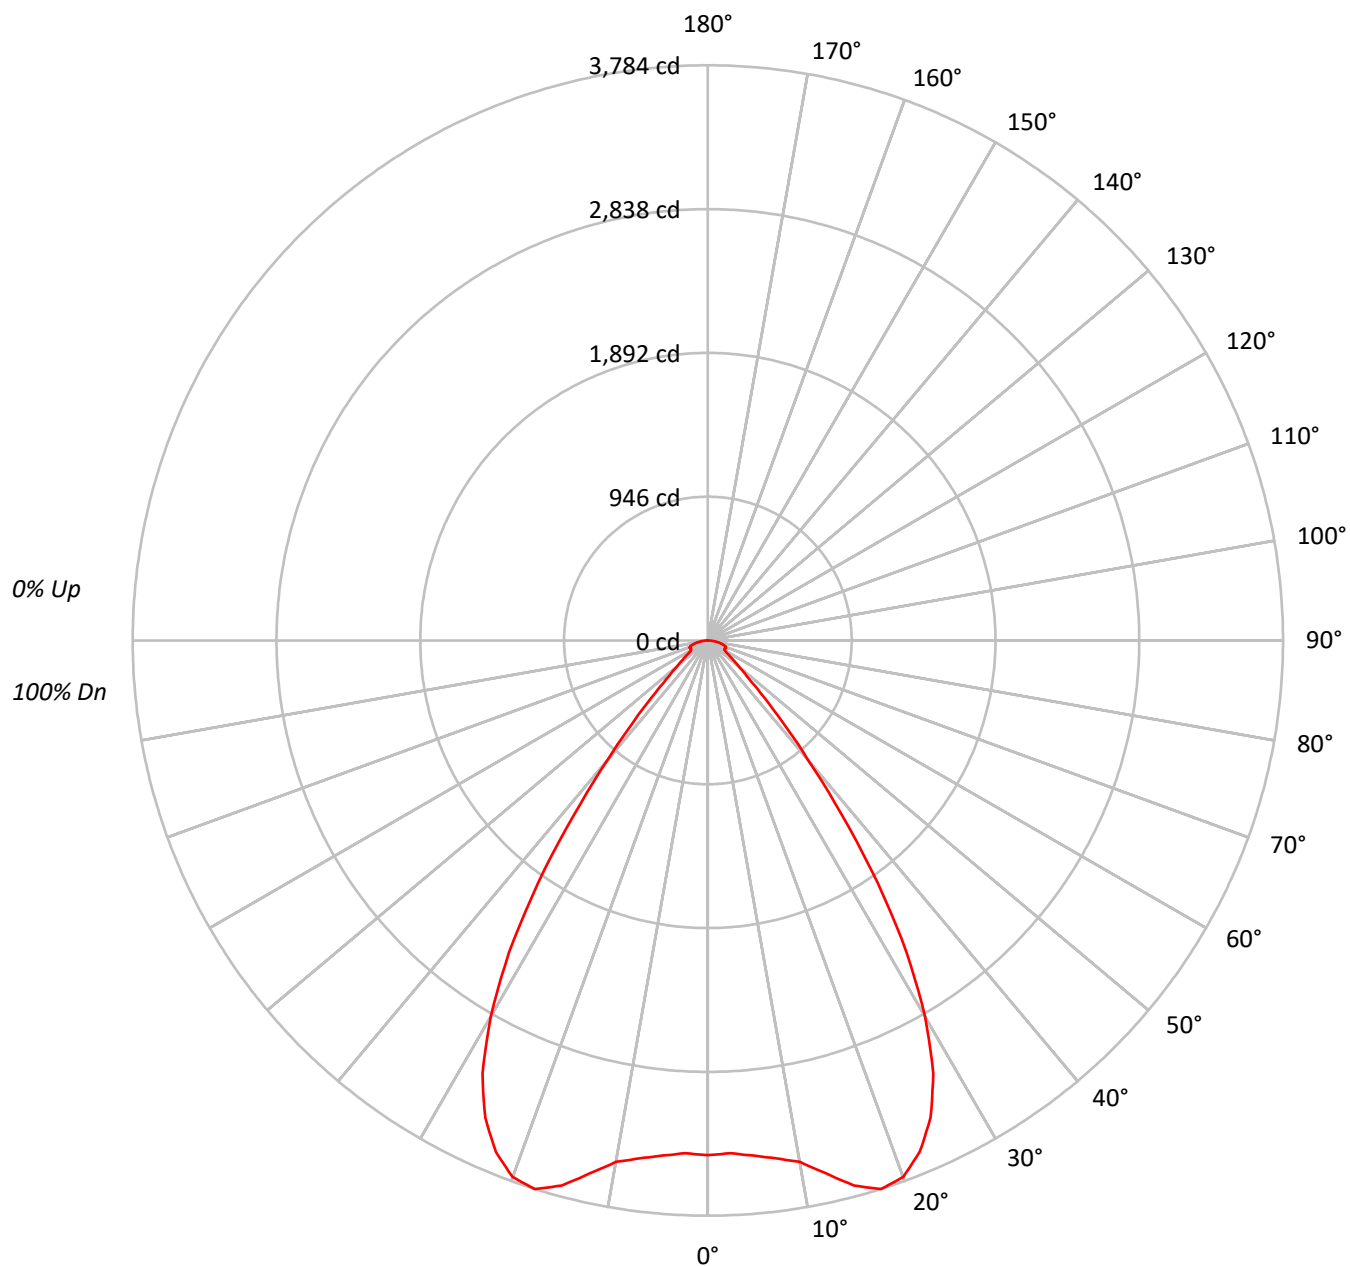



TEST NUMBER: P582698

CATALOG NUMBER: HC645D010-HM64560940-61WDWB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	102	103	100	98		99	97	95		95
2	106	100	95	91	103	98	94	90	95	91	88		92	89	86		89
3	99	92	86	81	97	90	85	81	88	83	79		85	81	78		83
4	93	85	78	73	91	83	78	73	81	76	72		79	75	71		77
5	88	78	72	67	86	77	71	66	75	70	66		74	69	65		72
6	83	73	66	61	81	72	66	61	70	65	60		69	64	60		67
7	78	68	61	56	77	67	61	56	66	60	56		64	59	55		63
8	74	63	57	52	73	63	56	52	61	56	52		60	55	51		59
9	70	59	53	48	69	59	52	48	58	52	48		57	51	48		56
10	66	56	49	45	65	55	49	45	54	48	45		53	48	44		53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	185588
5°	187167
10°	193912
15°	210631
20°	219096
25°	209565
30°	180857
35°	130219
40°	73359
45°	38019
50°	22669
55°	16334
60°	13880
65°	16007
70°	20292
75°	21435
80°	20962
85°	19939



TEST NUMBER: P582698

CATALOG NUMBER: HC645D010-HM64560940-61WDWB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	327.3	6.6
10°-20°	1046.8	21.0
20°-30°	1564.6	31.4
30°-40°	1196.0	24.0
40°-50°	417.7	8.4
50°-60°	159.2	3.2
60°-70°	124.9	2.5
70°-80°	105.6	2.1
80°-90°	34.0	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2938.6	59.1
0°-40°	4134.6	83.1
0°-60°	4711.5	94.7
0°-90°	4976.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4976.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3385	
5°	3401	327
15°	3711	1047
25°	3465	1565
35°	1946	1196
45°	490	418
55°	171	159
65°	123	125
75°	101	106
85°	32	34
90°	0	



TEST NUMBER: P582698

CATALOG NUMBER: HC645D010-HM64560940-61WDWB

CANDELA DISTRIBUTION (FULL):

	0°
0°	3385.4
2.5°	3375.9
5°	3401.2
7.5°	3436.1
10°	3483.5
12.5°	3591.1
15°	3711.3
17.5°	3784.1
20°	3755.6
22.5°	3641.7
25°	3464.6
27.5°	3211.4
30°	2857.1
32.5°	2433.0
35°	1945.8
37.5°	1442.8
40°	1025.1
42.5°	718.2
45°	490.4
47.5°	344.9
50°	265.8
52.5°	208.8
55°	170.9
57.5°	139.2
60°	126.6
62.5°	123.4
65°	123.4
67.5°	129.7
70°	126.6
72.5°	117.1
75°	101.2
77.5°	85.4
80°	66.4
82.5°	47.5
85°	31.7
87.5°	12.7
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)