

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582685

Luminaire Tested: **HC645D010-HM64560940-61MDC**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P582685
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC645D010-HM64560940-61MDC
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" MEDIUM DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4988.7 lumens
Efficiency: N/A
Efficacy: 113.4 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 0.96
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 44
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P582685

CATALOG NUMBER: HC645D010-HM64560940-61MDC

Luminous Intensity Polar Plot

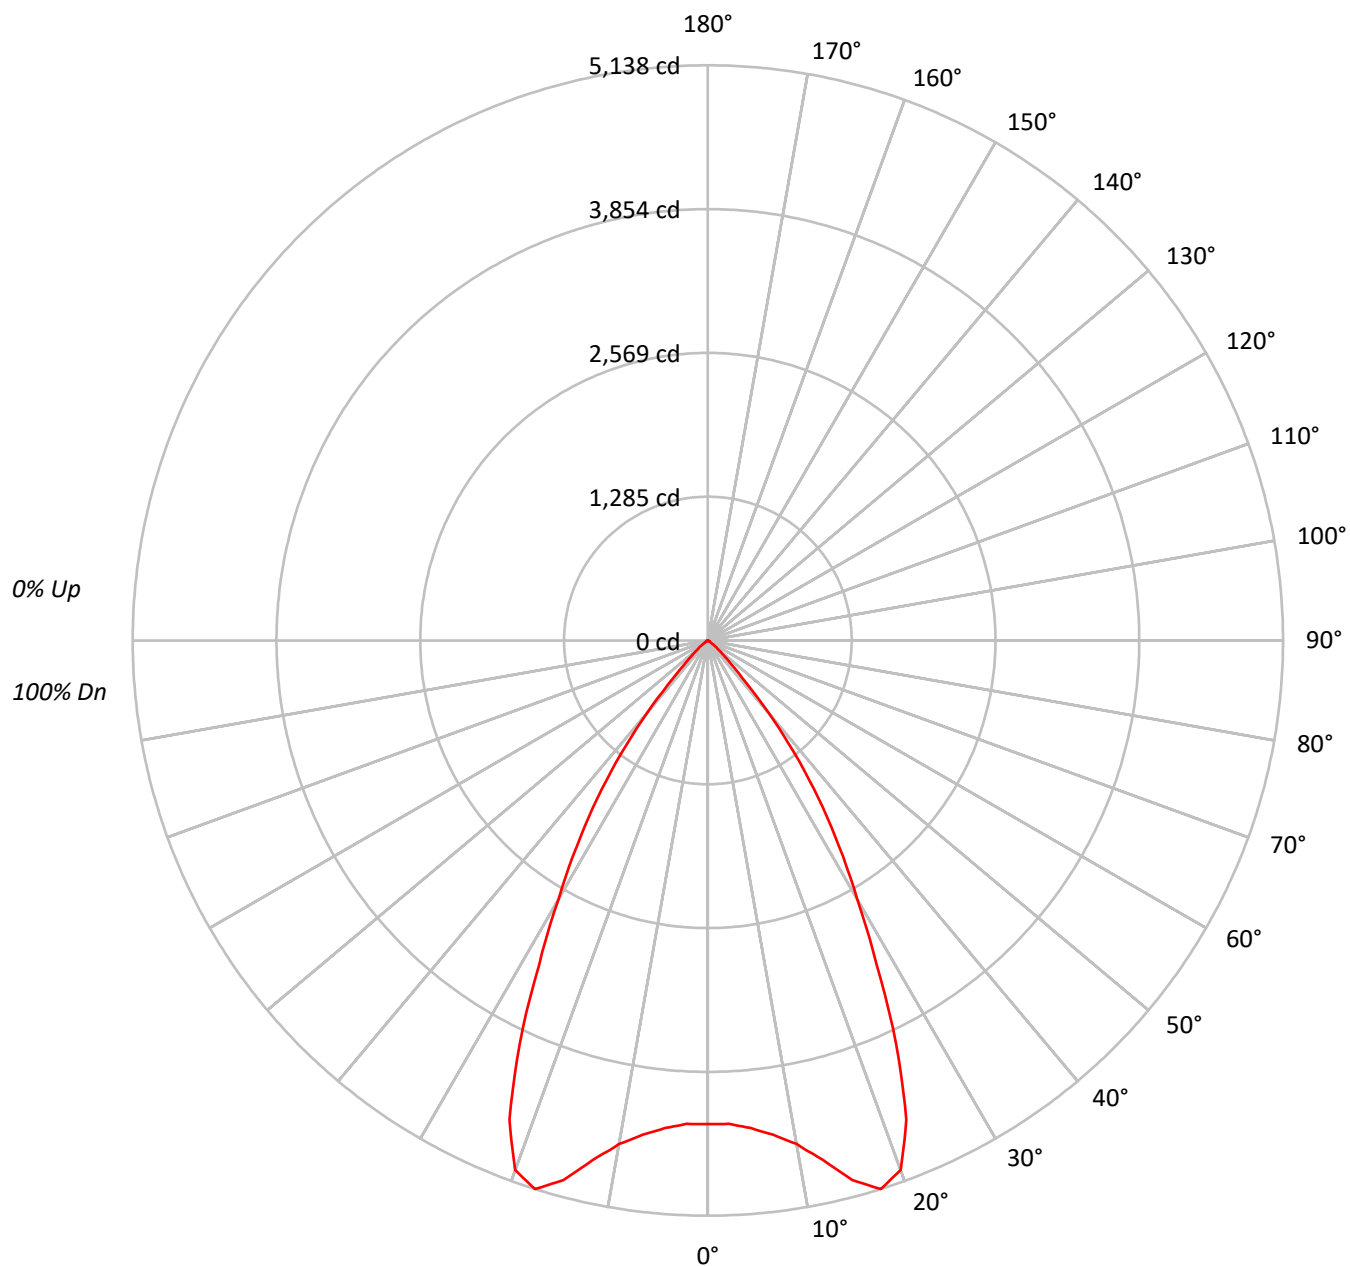



TEST NUMBER: P582685

CATALOG NUMBER: HC645D010-HM64560940-61MDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	106	104	105	103	101		101	99	98		97
2	108	103	99	96	106	101	98	95	98	95	93		95	93	91		92
3	102	96	91	87	100	95	90	86	92	88	85		90	86	84		87
4	97	90	84	80	95	89	83	79	86	82	79		84	81	78		83
5	92	84	78	74	91	83	78	73	81	76	73		80	75	72		78
6	88	79	73	68	86	78	72	68	76	71	68		75	71	67		74
7	83	74	68	64	82	73	68	63	72	67	63		71	66	63		70
8	79	70	63	59	78	69	63	59	68	63	59		67	62	59		66
9	75	66	60	56	74	65	59	55	64	59	55		63	58	55		62
10	72	62	56	52	71	61	56	52	61	55	52		60	55	52		59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	236900
5°	240589
10°	254287
15°	283140
20°	293629
25°	240915
30°	168811
35°	115168
40°	59991
45°	21087
50°	9441
55°	3030
60°	1732
65°	1232
70°	1010
75°	678
80°	0
85°	0



TEST NUMBER: P582685

CATALOG NUMBER: HC645D010-HM64560940-61MDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	423.5	8.5
10°-20°	1403.1	28.1
20°-30°	1786.5	35.8
30°-40°	1064.7	21.3
40°-50°	258.2	5.2
50°-60°	39.6	0.8
60°-70°	9.7	0.2
70°-80°	3.4	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3613.1	72.4
0°-40°	4677.8	93.8
0°-60°	4975.6	99.7
0°-90°	4988.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4988.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4321	
5°	4372	423
15°	4989	1403
25°	3983	1787
35°	1721	1065
45°	272	258
55°	32	40
65°	10	10
75°	3	3
85°	0	0
90°	0	



TEST NUMBER: P582685

CATALOG NUMBER: HC645D010-HM64560940-61MDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	4321.4
2.5°	4321.4
5°	4372.0
7.5°	4451.1
10°	4568.1
12.5°	4751.6
15°	4988.9
17.5°	5137.6
20°	5033.2
22.5°	4631.5
25°	3982.9
27.5°	3268.0
30°	2666.8
32.5°	2179.7
35°	1720.9
37.5°	1268.6
40°	838.3
42.5°	452.4
45°	272.0
47.5°	170.8
50°	110.7
52.5°	66.4
55°	31.7
57.5°	19.0
60°	15.8
62.5°	12.7
65°	9.5
67.5°	6.3
70°	6.3
72.5°	3.2
75°	3.2
77.5°	3.2
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)