

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582770

Luminaire Tested: **HC650D010-HM64560840-61WDWB**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P582770
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-10)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC650D010-HM64560840-61WDWB
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, WHITE BAFFLE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5968.5 lumens
Efficiency: N/A
Efficacy: 124.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.05
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 48
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P582770

CATALOG NUMBER: HC650D010-HM64560840-61WDWB

Luminous Intensity Polar Plot

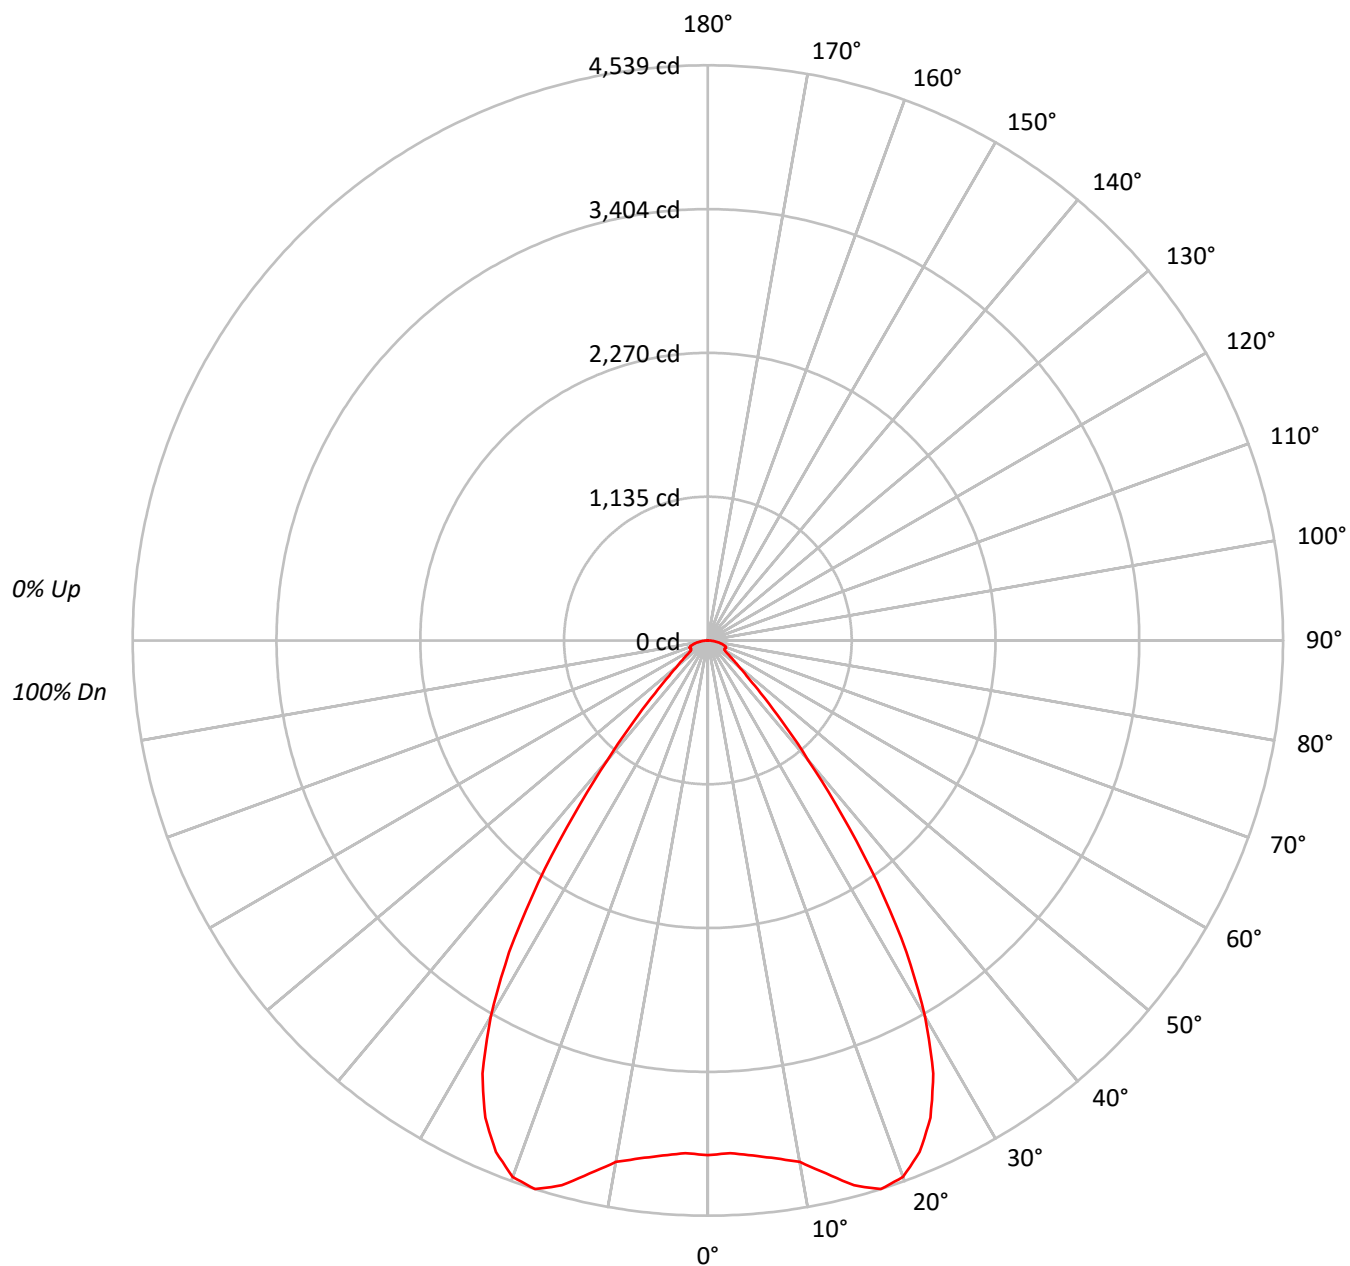



TEST NUMBER: P582770

CATALOG NUMBER: HC650D010-HM64560840-61WDWB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	112	109	106	103		110	107	104	102		103	100	98		99	97	95		95	94	93
2	106	100	95	91		103	98	94	90		95	91	88		92	89	86		89	86	84
3	99	92	86	81		97	90	85	81		88	83	79		85	81	78		83	80	77
4	93	85	78	73		91	83	78	73		81	76	72		79	75	71		77	73	70
5	88	78	72	67		86	77	71	66		75	70	66		74	69	65		72	68	65
6	83	73	66	61		81	72	66	61		70	65	60		69	64	60		67	63	60
7	78	68	61	56		77	67	61	56		66	60	56		64	59	55		63	59	55
8	74	63	57	52		73	63	56	52		61	56	52		60	55	51		59	55	51
9	70	59	53	48		69	59	52	48		58	52	48		57	51	48		56	51	48
10	66	56	49	45		65	55	49	45		54	48	45		53	48	44		53	48	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	222614
5°	224499
10°	232594
15°	252640
20°	262797
25°	251361
30°	216926
35°	156198
40°	87986
45°	45609
50°	27189
55°	19584
60°	16643
65°	19198
70°	24331
75°	25714
80°	25161
85°	23839



TEST NUMBER: P582770

CATALOG NUMBER: HC650D010-HM64560840-61WDWB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	392.6	6.6
10°-20°	1255.5	21.0
20°-30°	1876.6	31.4
30°-40°	1434.5	24.0
40°-50°	501.1	8.4
50°-60°	190.9	3.2
60°-70°	149.8	2.5
70°-80°	126.7	2.1
80°-90°	40.8	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3524.7	59.1
0°-40°	4959.3	83.1
0°-60°	5651.3	94.7
0°-90°	5968.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5968.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4061	
5°	4080	393
15°	4452	1256
25°	4156	1877
35°	2334	1435
45°	588	501
55°	205	191
65°	148	150
75°	121	127
85°	38	41
90°	0	



TEST NUMBER: P582770

CATALOG NUMBER: HC650D010-HM64560840-61WDWB

CANDELA DISTRIBUTION (FULL):

0°	
0°	4060.8
2.5°	4049.3
5°	4079.6
7.5°	4121.5
10°	4178.4
12.5°	4307.3
15°	4451.5
17.5°	4538.9
20°	4504.7
22.5°	4368.0
25°	4155.6
27.5°	3851.9
30°	3426.9
32.5°	2918.4
35°	2334.0
37.5°	1730.5
40°	1229.5
42.5°	861.4
45°	588.3
47.5°	413.7
50°	318.8
52.5°	250.5
55°	204.9
57.5°	167.0
60°	151.8
62.5°	148.0
65°	148.0
67.5°	155.7
70°	151.8
72.5°	140.4
75°	121.4
77.5°	102.5
80°	79.7
82.5°	56.9
85°	37.9
87.5°	15.2
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)