

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582757

Luminaire Tested: **HC650D010-HM64560840-61MDC**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P582757
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC650D010-HM64560840-61MDC
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" MEDIUM DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5983.8 lumens
Efficiency: N/A
Efficacy: 124.7 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 0.96
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 48
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P582757

CATALOG NUMBER: HC650D010-HM64560840-61MDC

Luminous Intensity Polar Plot

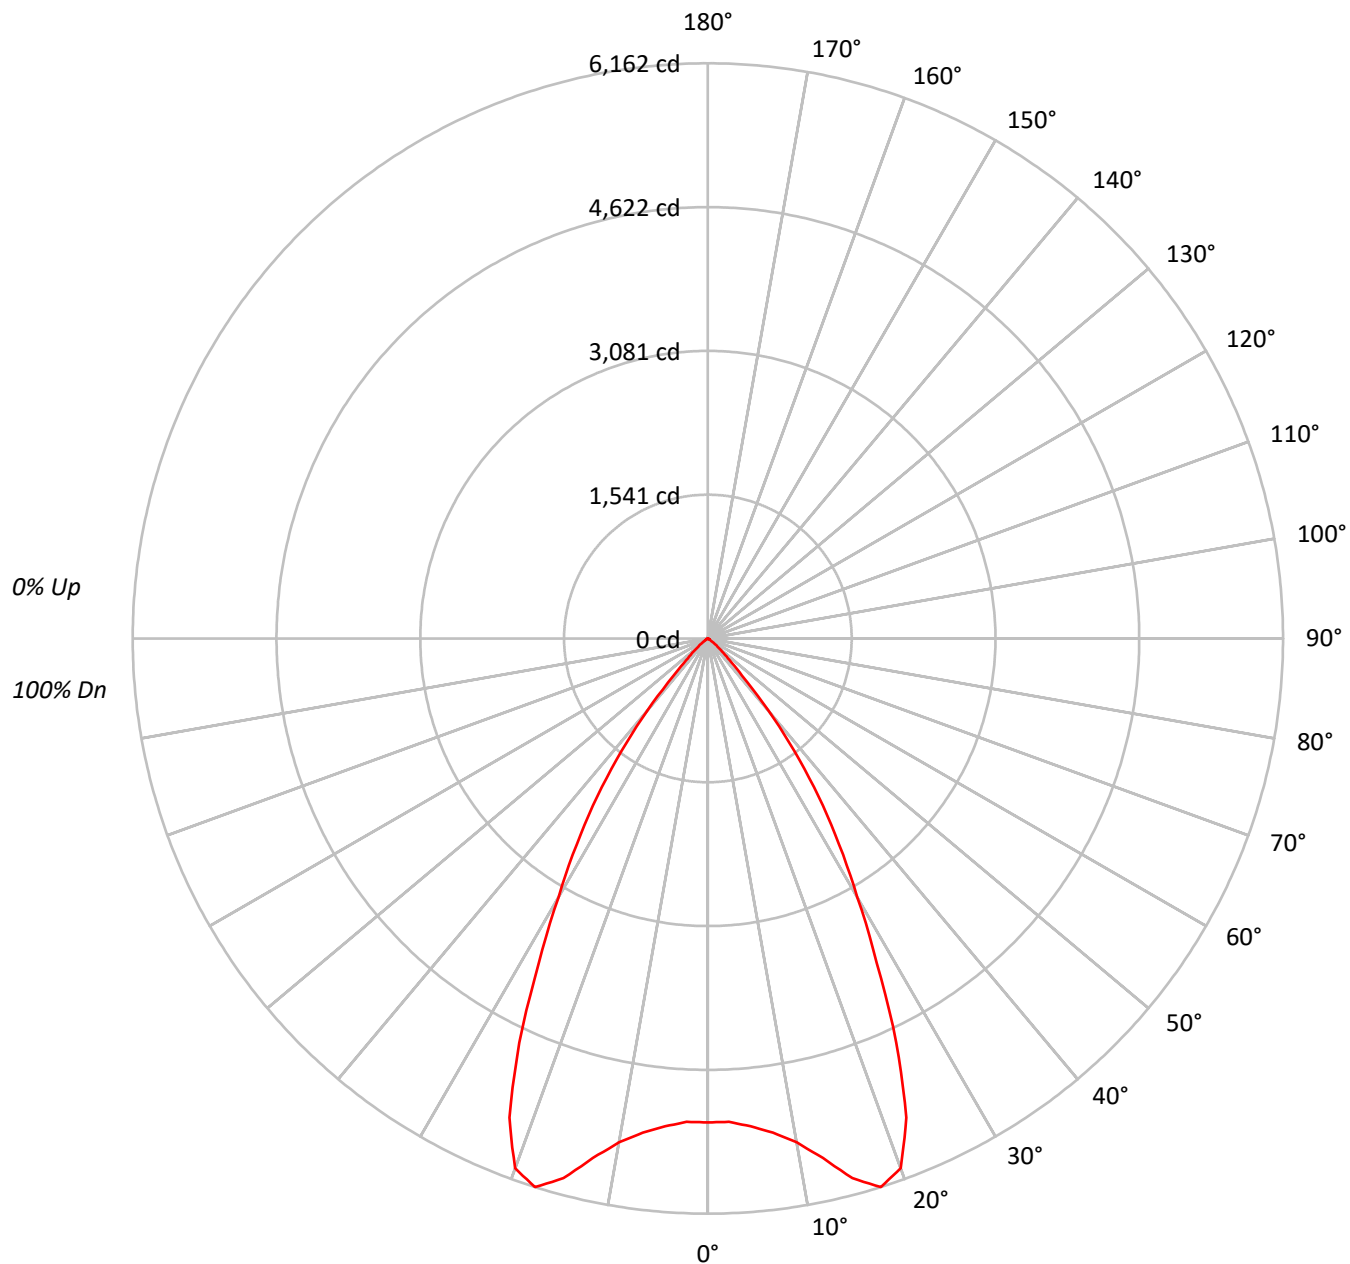



TEST NUMBER: P582757

CATALOG NUMBER: HC650D010-HM64560840-61MDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	106	104	105	103	101		101	99	98		97
2	108	103	99	96	106	101	98	95	98	95	93		95	93	91		92
3	102	96	91	87	100	95	90	86	92	88	85		90	86	84		87
4	97	90	84	80	95	89	83	79	86	82	79		84	81	78		83
5	92	84	78	74	91	83	78	73	81	76	73		80	75	72		78
6	88	79	73	68	86	78	72	68	76	71	68		75	71	67		74
7	83	74	68	64	82	73	68	63	72	67	63		71	66	63		70
8	79	70	63	59	78	69	63	59	68	63	59		67	62	59		66
9	75	66	60	56	74	65	59	55	64	59	55		63	58	55		62
10	72	62	56	52	71	61	56	52	61	55	52		60	55	52		59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	284155
5°	288581
10°	305016
15°	339616
20°	352201
25°	288972
30°	202493
35°	138149
40°	71956
45°	25297
50°	11334
55°	3622
60°	2083
65°	1466
70°	1218
75°	805
80°	0
85°	0



TEST NUMBER: P582757

CATALOG NUMBER: HC650D010-HM64560840-61MDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	508.0	8.5
10°-20°	1682.9	28.1
20°-30°	2142.8	35.8
30°-40°	1277.1	21.3
40°-50°	309.7	5.2
50°-60°	47.5	0.8
60°-70°	11.7	0.2
70°-80°	4.0	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4333.7	72.4
0°-40°	5610.8	93.8
0°-60°	5968.1	99.7
0°-90°	5983.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5983.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5183	
5°	5244	508
15°	5984	1683
25°	4777	2143
35°	2064	1277
45°	326	310
55°	38	48
65°	11	12
75°	4	4
85°	0	0
90°	0	



TEST NUMBER: P582757

CATALOG NUMBER: HC650D010-HM64560840-61MDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	5183.4
2.5°	5183.4
5°	5244.1
7.5°	5338.9
10°	5479.4
12.5°	5699.4
15°	5984.0
17.5°	6162.3
20°	6037.2
22.5°	5555.2
25°	4777.4
27.5°	3919.7
30°	3198.9
32.5°	2614.5
35°	2064.3
37.5°	1521.6
40°	1005.5
42.5°	542.7
45°	326.3
47.5°	204.9
50°	132.9
52.5°	79.7
55°	37.9
57.5°	22.8
60°	19.0
62.5°	15.2
65°	11.3
67.5°	7.6
70°	7.6
72.5°	3.8
75°	3.8
77.5°	3.8
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)