

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582763

Luminaire Tested: **HC650D010-HM64560840-61PSMDW**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P582763
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-12)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC650D010-HM64560840-61PSMDW
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" PLASTIC TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5372.8 lumens
Efficiency: N/A
Efficacy: 111.9 lumens/watt
Spacing Criteria (0/90/45): 1.09 / 1.09 / 1.04
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 48
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P582763

CATALOG NUMBER: HC650D010-HM64560840-61PSMDW

Luminous Intensity Polar Plot

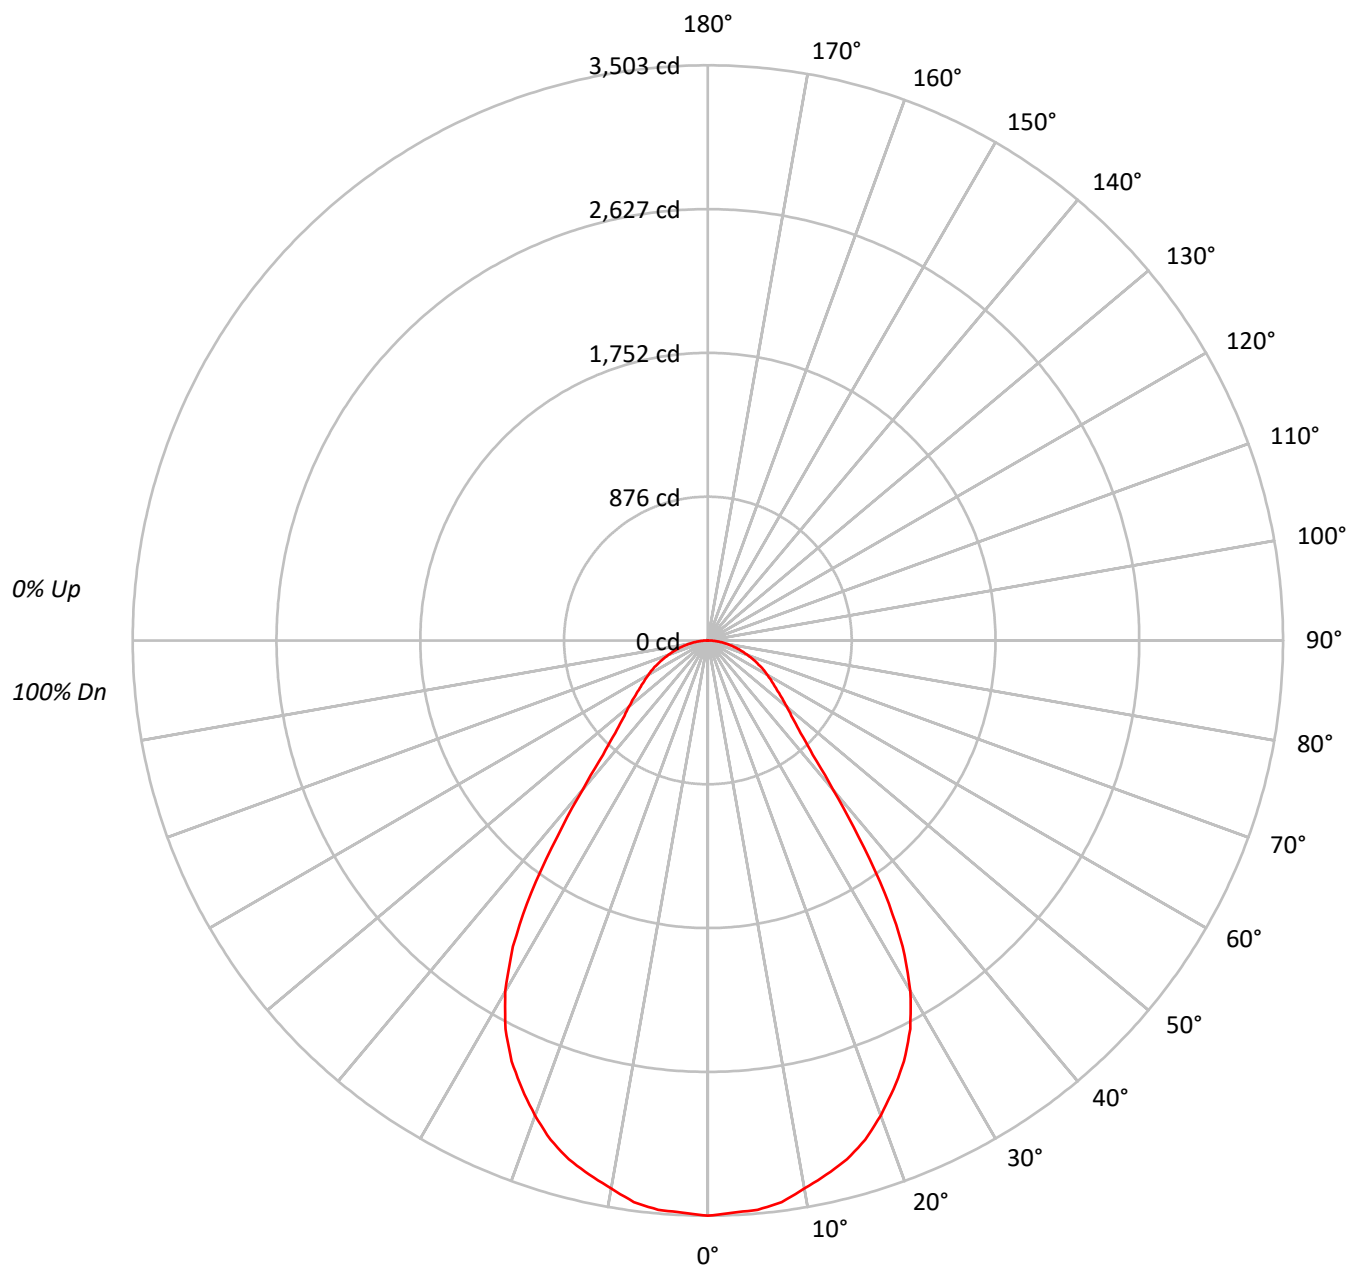



TEST NUMBER: P582763

CATALOG NUMBER: HC650D010-HM64560840-61PSMDW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	111	107	104	101	108	105	102	99	101	98	96		97	95	93		93
2	103	96	91	86	101	95	90	85	91	87	83		88	85	82		85
3	96	87	81	75	94	86	80	75	83	78	73		80	76	72		78
4	89	80	72	67	87	78	72	66	76	70	65		74	69	65		72
5	84	73	65	60	82	72	65	59	70	64	59		68	63	58		66
6	78	67	59	54	77	66	59	54	64	58	53		63	57	53		61
7	73	62	54	49	72	61	54	49	60	53	49		58	53	48		57
8	69	57	50	45	68	57	50	45	56	49	45		54	49	44		53
9	65	53	46	41	64	53	46	41	52	46	41		51	45	41		50
10	62	50	43	38	60	49	43	38	49	42	38		48	42	38		47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	192041
5°	191519
10°	188663
15°	185671
20°	179560
25°	171022
30°	156163
35°	125722
40°	84737
45°	61797
50°	53405
55°	48247
60°	45775
65°	43325
70°	40760
75°	38592
80°	35926
85°	33399



TEST NUMBER: P582763

CATALOG NUMBER: HC650D010-HM64560840-61PSMDW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	329.4	6.1
10°-20°	918.7	17.1
20°-30°	1290.8	24.0
30°-40°	1149.0	21.4
40°-50°	642.1	12.0
50°-60°	457.5	8.5
60°-70°	332.9	6.2
70°-80°	192.7	3.6
80°-90°	59.9	1.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2538.9	47.3
0°-40°	3687.8	68.6
0°-60°	4787.4	89.1
0°-90°	5372.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5372.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3503	
5°	3480	329
15°	3272	919
25°	2827	1291
35°	1879	1149
45°	797	642
55°	505	457
65°	334	333
75°	182	193
85°	53	60
90°	0	



TEST NUMBER: P582763

CATALOG NUMBER: HC650D010-HM64560840-61PSMDW

CANDELA DISTRIBUTION (FULL):

	0°
0°	3503.1
2.5°	3487.8
5°	3480.3
7.5°	3449.9
10°	3389.2
12.5°	3332.3
15°	3271.5
17.5°	3188.0
20°	3077.9
22.5°	2956.5
25°	2827.4
27.5°	2668.1
30°	2467.0
32.5°	2208.8
35°	1878.6
37.5°	1506.7
40°	1184.1
42.5°	945.0
45°	797.1
47.5°	698.3
50°	626.2
52.5°	561.7
55°	504.8
57.5°	459.2
60°	417.5
62.5°	379.6
65°	334.0
67.5°	296.1
70°	254.3
72.5°	216.4
75°	182.2
77.5°	148.0
80°	113.8
82.5°	83.5
85°	53.1
87.5°	26.6
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)