

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582834

Luminaire Tested: **HC650D010-HM64560940-61NDW**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P582834
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-3)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC650D010-HM64560940-61NDW
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" NARROW DISTRIBUTION, WHITE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4556.4 lumens
Efficiency: N/A
Efficacy: 94.9 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.03
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 48
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P582834

CATALOG NUMBER: HC650D010-HM64560940-61NDW

Luminous Intensity Polar Plot

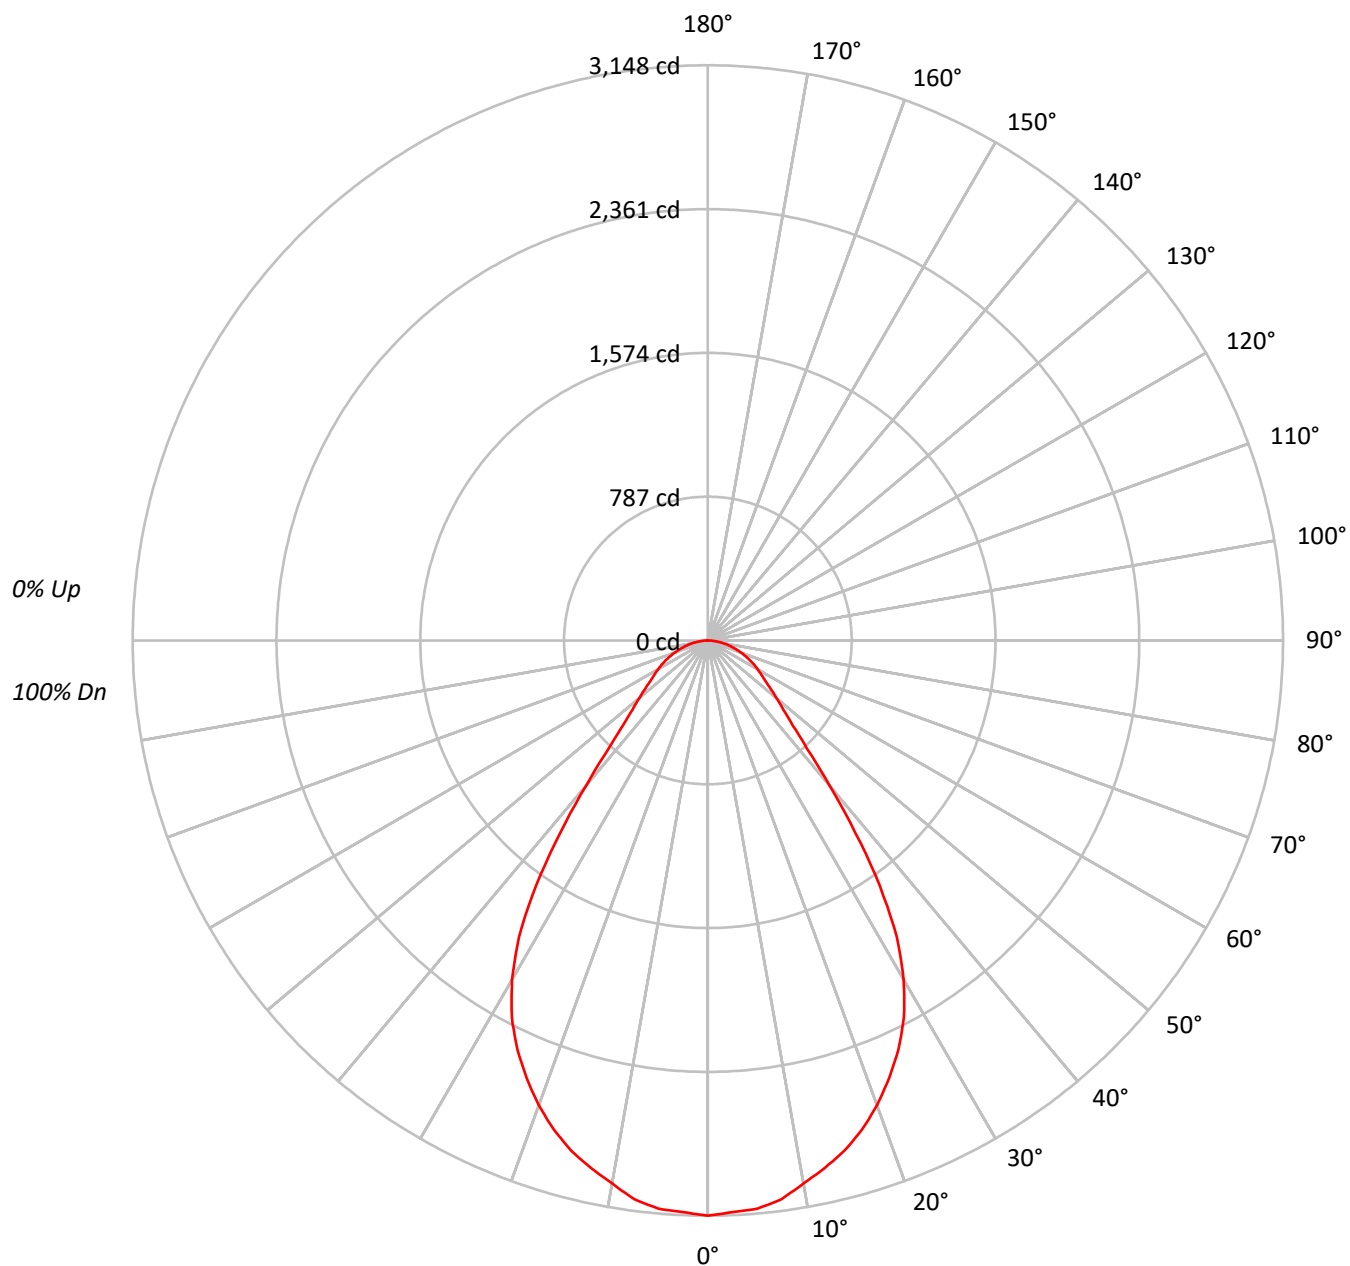



TEST NUMBER: P582834

CATALOG NUMBER: HC650D010-HM64560940-61NDW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	111	108	104	101		109	105	102	100		101	99	96		97	95	94		94	92	91
2	104	97	92	87		101	95	90	86		92	88	84		89	85	83		86	83	81
3	97	88	82	77		94	87	81	76		84	79	75		81	77	73		79	75	72
4	90	81	73	68		88	79	73	68		77	71	67		75	70	66		73	69	65
5	84	74	67	61		83	73	66	61		71	65	60		69	64	60		67	63	59
6	79	68	61	55		77	67	60	55		66	59	55		64	59	54		63	58	54
7	74	63	56	50		73	62	55	50		61	55	50		60	54	50		58	53	49
8	70	59	51	46		69	58	51	46		57	50	46		56	50	46		54	49	46
9	66	55	48	43		65	54	47	43		53	47	42		52	46	42		51	46	42
10	62	51	44	40		61	51	44	40		50	44	39		49	43	39		48	43	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	172579
5°	171764
10°	167972
15°	164025
20°	157864
25°	149295
30°	135679
35°	109821
40°	74053
45°	50889
50°	41696
55°	36491
60°	34526
65°	32585
70°	30582
75°	29103
80°	26424
85°	23147



TEST NUMBER: P582834

CATALOG NUMBER: HC650D010-HM64560940-61NDW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	294.7	6.5
10°-20°	811.6	17.8
20°-30°	1127.6	24.7
30°-40°	1004.0	22.0
40°-50°	533.0	11.7
50°-60°	348.6	7.6
60°-70°	249.8	5.5
70°-80°	144.9	3.2
80°-90°	42.3	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2233.9	49.0
0°-40°	3237.9	71.1
0°-60°	4119.4	90.4
0°-90°	4556.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4556.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3148	
5°	3121	295
15°	2890	812
25°	2468	1128
35°	1641	1004
45°	656	533
55°	382	349
65°	251	250
75°	137	145
85°	37	42
90°	0	



TEST NUMBER: P582834

CATALOG NUMBER: HC650D010-HM64560940-61NDW

CANDELA DISTRIBUTION (FULL):

	0°
0°	3148.1
2.5°	3131.3
5°	3121.3
7.5°	3084.4
10°	3017.5
12.5°	2957.2
15°	2890.1
17.5°	2806.5
20°	2706.0
22.5°	2592.2
25°	2468.2
27.5°	2324.2
30°	2143.4
32.5°	1925.7
35°	1641.0
37.5°	1326.3
40°	1034.8
42.5°	803.8
45°	656.4
47.5°	559.3
50°	488.9
52.5°	432.0
55°	381.8
57.5°	345.0
60°	314.9
62.5°	284.6
65°	251.2
67.5°	221.1
70°	190.8
72.5°	164.2
75°	137.4
77.5°	110.5
80°	83.7
82.5°	60.2
85°	36.8
87.5°	16.8
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)