

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582835

Luminaire Tested: **HC650D010-HM64560940-61PSMDW**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P582835
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-12)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC650D010-HM64560940-61PSMDW
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" PLASTIC TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4740.5 lumens
Efficiency: N/A
Efficacy: 98.8 lumens/watt
Spacing Criteria (0/90/45): 1.09 / 1.09 / 1.04
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 48
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P582835

CATALOG NUMBER: HC650D010-HM64560940-61PSMDW

Luminous Intensity Polar Plot

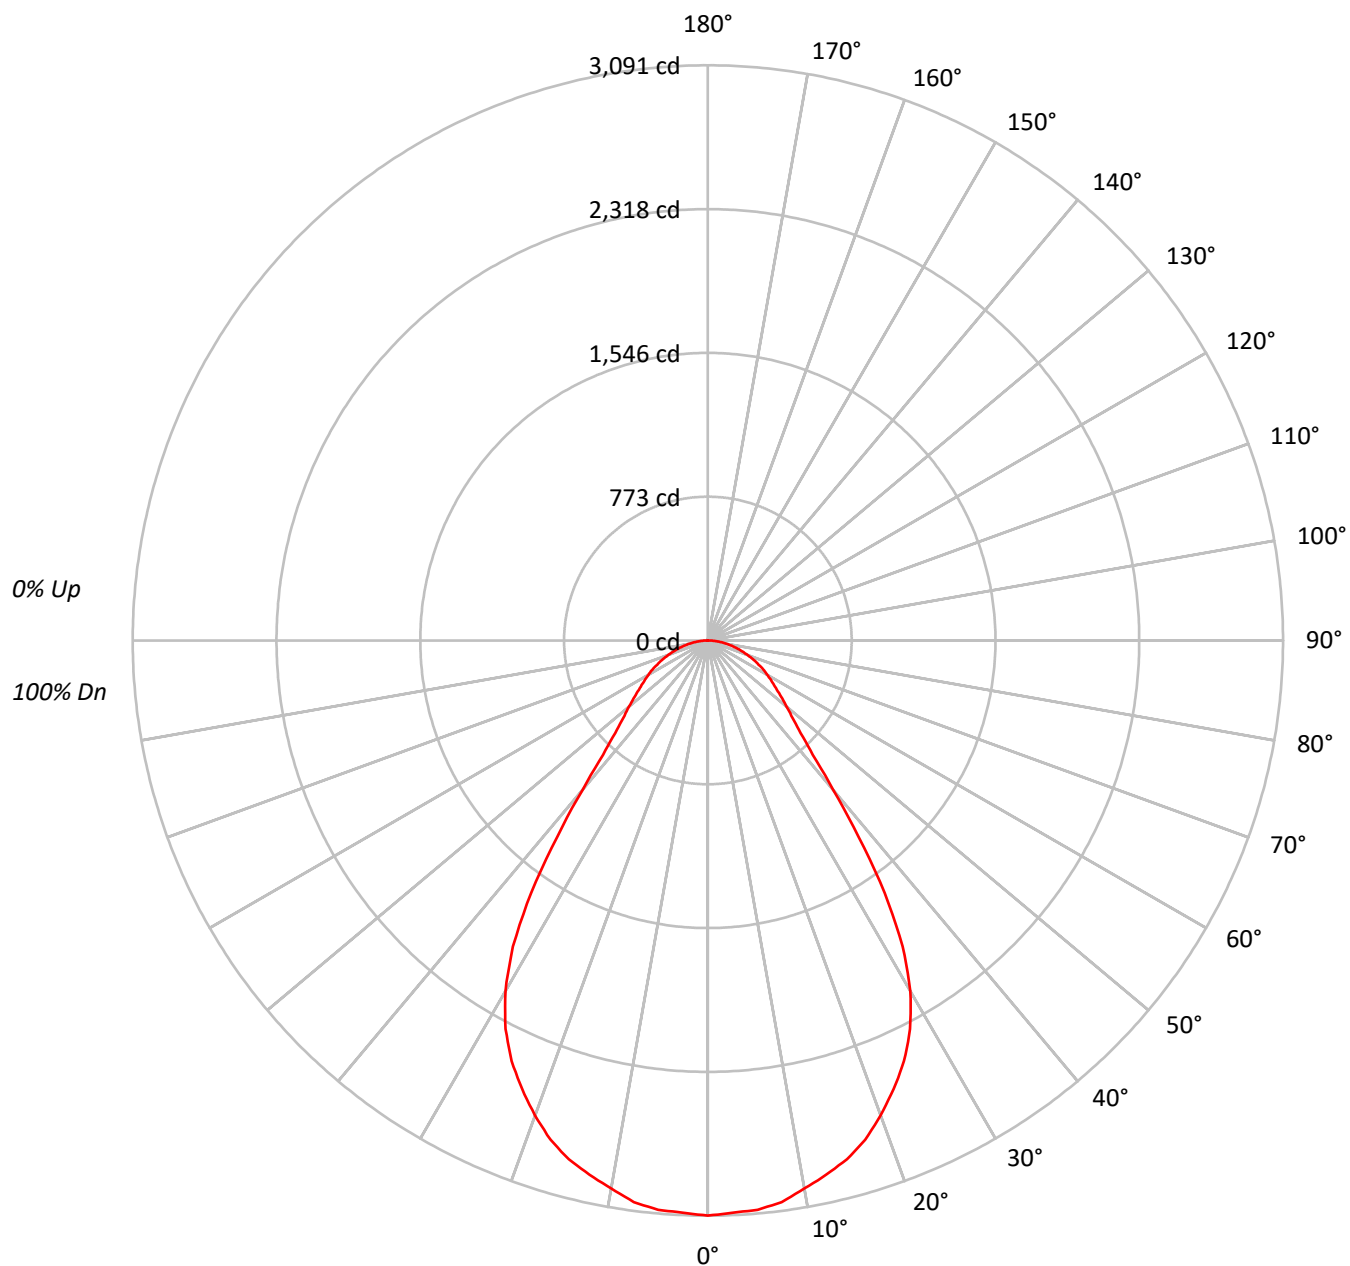



TEST NUMBER: P582835

CATALOG NUMBER: HC650D010-HM64560940-61PSMDW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10		50	30	10			50	30	10			50
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111			106	106	106			102
1	111	107	104	101	108	105	102	99		101	98	96			97	95	93			93
2	103	96	91	86	101	95	90	85		91	87	83			88	85	82			85
3	96	87	81	75	94	86	80	75		83	78	73			80	76	72			78
4	89	80	72	67	87	78	72	66		76	70	65			74	69	65			72
5	84	73	65	60	82	72	65	59		70	64	59			68	63	58			66
6	78	67	59	54	77	66	59	54		64	58	53			63	57	53			61
7	73	62	54	49	72	61	54	49		60	53	49			58	53	48			57
8	69	57	50	45	68	57	50	45		56	49	45			54	49	44			53
9	65	53	46	41	64	53	46	41		52	46	41			51	45	41			50
10	62	50	43	38	60	49	43	38		49	42	38			48	42	38			47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	169438
5°	168979
10°	166458
15°	163820
20°	158430
25°	150898
30°	137781
35°	110925
40°	74769
45°	54517
50°	47120
55°	42570
60°	40392
65°	38227
70°	35968
75°	34038
80°	31728
85°	29500



TEST NUMBER: P582835

CATALOG NUMBER: HC650D010-HM64560940-61PSMDW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	290.6	6.1
10°-20°	810.6	17.1
20°-30°	1138.9	24.0
30°-40°	1013.8	21.4
40°-50°	566.5	12.0
50°-60°	403.6	8.5
60°-70°	293.7	6.2
70°-80°	170.0	3.6
80°-90°	52.9	1.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2240.1	47.3
0°-40°	3253.9	68.6
0°-60°	4224.0	89.1
0°-90°	4740.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4740.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3091	
5°	3071	291
15°	2886	811
25°	2495	1139
35°	1658	1014
45°	703	567
55°	445	404
65°	295	294
75°	161	170
85°	47	53
90°	0	



TEST NUMBER: P582835

CATALOG NUMBER: HC650D010-HM64560940-61PSMDW

CANDELA DISTRIBUTION (FULL):

0°	
0°	3090.8
2.5°	3077.4
5°	3070.7
7.5°	3043.9
10°	2990.3
12.5°	2940.1
15°	2886.5
17.5°	2812.9
20°	2715.7
22.5°	2608.6
25°	2494.7
27.5°	2354.1
30°	2176.6
32.5°	1948.9
35°	1657.5
37.5°	1329.5
40°	1044.8
42.5°	833.8
45°	703.2
47.5°	616.1
50°	552.5
52.5°	495.5
55°	445.4
57.5°	405.2
60°	368.4
62.5°	334.8
65°	294.7
67.5°	261.2
70°	224.4
72.5°	190.8
75°	160.7
77.5°	130.6
80°	100.5
82.5°	73.7
85°	46.9
87.5°	23.4
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)