

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582875

Luminaire Tested: **HC605D010-HM60525830-61WDC**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P582875
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-7)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC605D010-HM60525830-61WDC
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 770.0 lumens
Efficiency: N/A
Efficacy: 128.3 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.28 / 1.09
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P582875

CATALOG NUMBER: HC605D010-HM60525830-61WDC

Luminous Intensity Polar Plot

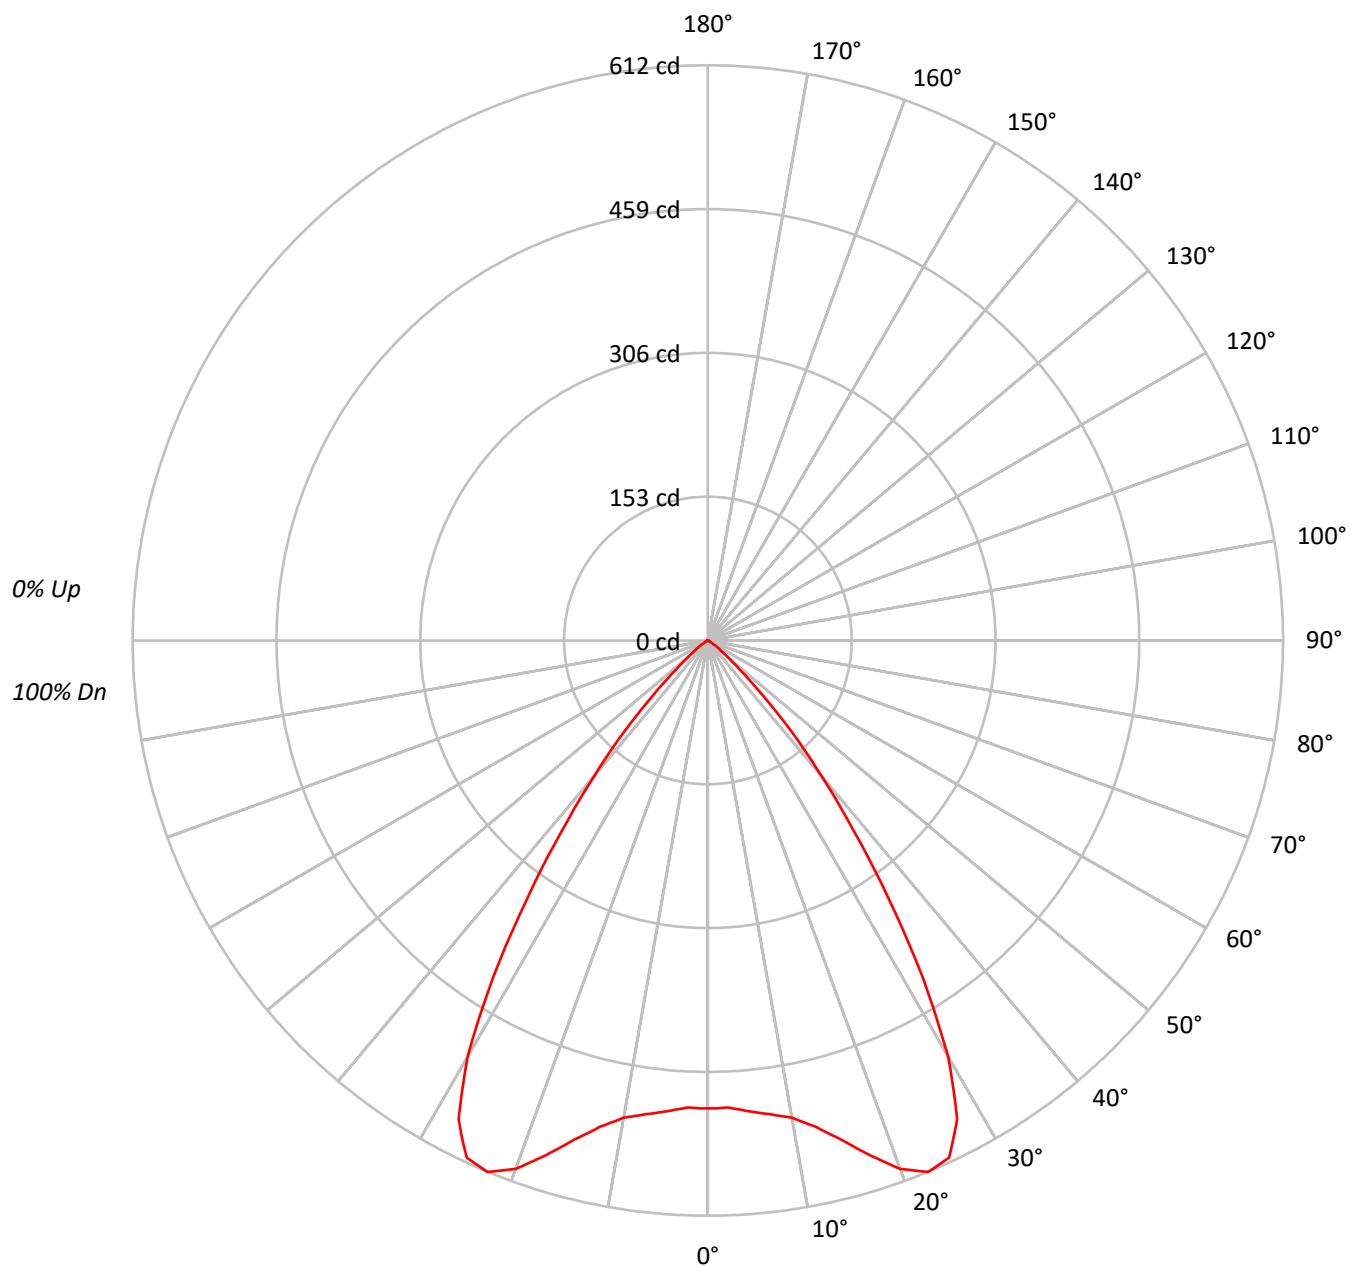



TEST NUMBER: P582875

CATALOG NUMBER: HC605D010-HM60525830-61WDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	108	105		111	108	106	103		104	102	100		100	99	97		97	96	94
2	107	102	97	94		105	100	96	93		97	94	91		94	91	89		91	89	87
3	101	94	89	85		99	93	88	84		90	86	82		88	84	81		85	82	80
4	95	87	81	77		93	86	80	76		84	79	75		82	78	74		80	76	74
5	90	81	75	70		88	80	74	70		78	73	69		76	72	68		75	71	68
6	85	75	69	64		83	74	68	64		73	67	63		71	67	63		70	66	62
7	80	70	63	59		79	69	63	59		68	62	58		67	62	58		66	61	58
8	76	65	59	54		74	65	59	54		64	58	54		62	57	54		61	57	53
9	71	61	55	50		70	60	54	50		60	54	50		59	53	50		58	53	50
10	68	57	51	47		67	57	51	47		56	50	46		55	50	46		54	50	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	27300
5°	27663
10°	28701
15°	31215
20°	34898
25°	36734
30°	32340
35°	22433
40°	13389
45°	6373
50°	2397
55°	1004
60°	307
65°	246
70°	144
75°	106
80°	158
85°	0



TEST NUMBER: P582875

CATALOG NUMBER: HC605D010-HM60525830-61WDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	48.4	6.3
10°-20°	157.9	20.5
20°-30°	270.6	35.1
30°-40°	210.2	27.3
40°-50°	69.5	9.0
50°-60°	10.6	1.4
60°-70°	1.9	0.2
70°-80°	0.7	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	477.0	61.9
0°-40°	687.1	89.2
0°-60°	767.2	99.6
0°-90°	770.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	770.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	498	
5°	503	48
15°	550	158
25°	607	271
35°	335	210
45°	82	69
55°	10	11
65°	2	2
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P582875

CATALOG NUMBER: HC605D010-HM60525830-61WDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	498.0
2.5°	497.5
5°	502.7
7.5°	508.5
10°	515.6
12.5°	530.0
15°	550.0
17.5°	574.4
20°	598.2
22.5°	612.1
25°	607.3
27.5°	574.4
30°	510.9
32.5°	425.4
35°	335.2
37.5°	254.5
40°	187.1
42.5°	132.2
45°	82.2
47.5°	45.9
50°	28.1
52.5°	17.2
55°	10.5
57.5°	5.2
60°	2.8
62.5°	2.4
65°	1.9
67.5°	1.5
70°	0.9
72.5°	0.9
75°	0.5
77.5°	0.5
80°	0.5
82.5°	0.5
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)