

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P582910

Luminaire Tested: **HC605D010-HM60525840-61WDBB**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P582910
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-11)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC605D010-HM60525840-61WDBB
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, BLACK BAFFLE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 660.8 lumens
Efficiency: N/A
Efficacy: 110.1 lumens/watt
Spacing Criteria (0/90/45): 1.32 / 1.32 / 1.14
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P582910

CATALOG NUMBER: HC605D010-HM60525840-61WDBB

Luminous Intensity Polar Plot

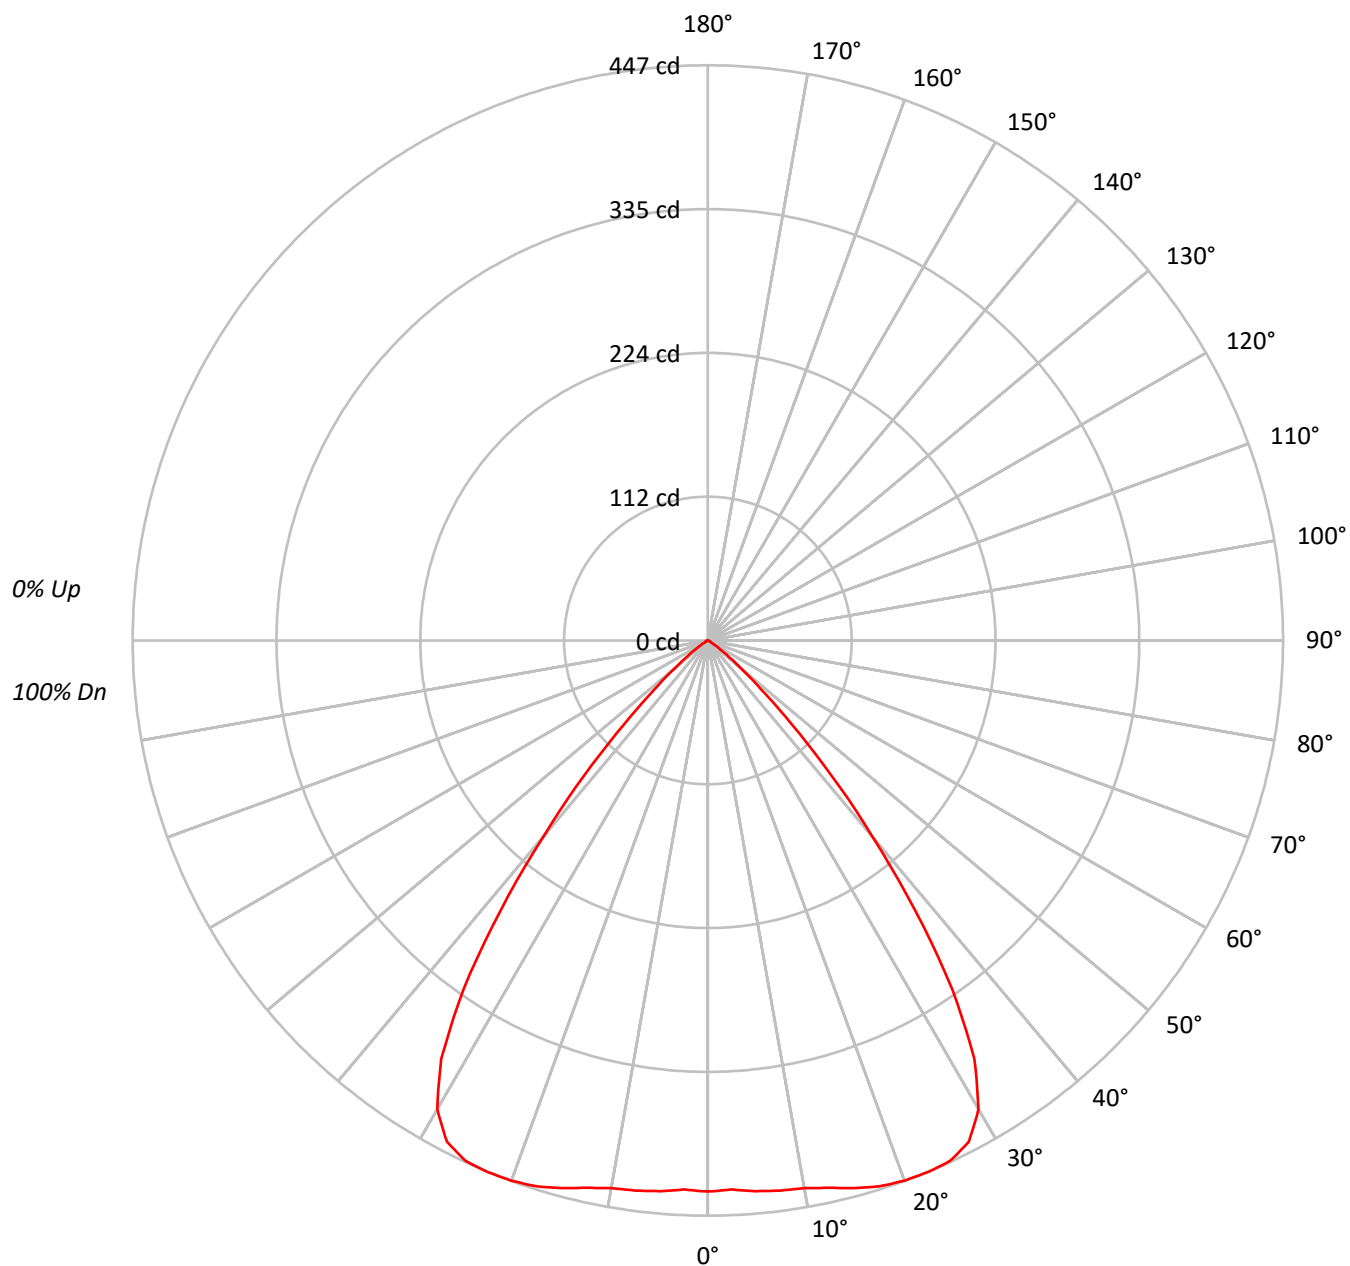



TEST NUMBER: P582910

CATALOG NUMBER: HC605D010-HM60525840-61WDBB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10		50	30	10			50	30	10			50
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111			106	106	106			102
1	113	110	107	105	110	108	105	103		104	102	100			100	98	97			97
2	107	101	97	93	104	100	95	92		96	93	90			93	91	88			90
3	100	93	88	83	98	92	87	83		89	85	81			87	83	80			84
4	95	86	80	75	93	85	79	75		83	78	74			81	77	73			79
5	89	80	73	68	87	79	73	68		77	72	67			75	70	67			73
6	84	74	67	62	82	73	67	62		71	66	62			70	65	61			69
7	79	68	62	57	77	68	61	57		66	61	57			65	60	56			64
8	74	64	57	52	73	63	57	52		62	56	52			61	56	52			60
9	70	59	53	48	69	59	53	48		58	52	48			57	52	48			56
10	66	56	49	45	65	55	49	45		54	49	45			53	48	44			53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	23474
5°	23641
10°	24053
15°	25011
20°	26060
25°	26983
30°	26624
35°	22185
40°	14227
45°	7102
50°	2814
55°	965
60°	274
65°	195
70°	160
75°	212
80°	158
85°	0



TEST NUMBER: P582910

CATALOG NUMBER: HC605D010-HM60525840-61WDBB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	41.1	6.2
10°-20°	125.0	18.9
20°-30°	204.1	30.9
30°-40°	200.1	30.3
40°-50°	76.7	11.6
50°-60°	11.3	1.7
60°-70°	1.7	0.3
70°-80°	0.9	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	370.1	56.0
0°-40°	570.2	86.3
0°-60°	658.1	99.6
0°-90°	660.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	660.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	428	
5°	430	41
15°	441	125
25°	446	204
35°	332	200
45°	92	77
55°	10	11
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P582910

CATALOG NUMBER: HC605D010-HM60525840-61WDBB

CANDELA DISTRIBUTION (FULL):

	0°
0°	428.2
2.5°	427.1
5°	429.6
7.5°	431.2
10°	432.1
12.5°	435.6
15°	440.7
17.5°	444.7
20°	446.7
22.5°	447.1
25°	446.1
27.5°	439.1
30°	420.6
32.5°	385.6
35°	331.5
37.5°	264.9
40°	198.8
42.5°	141.7
45°	91.6
47.5°	56.0
50°	33.0
52.5°	19.0
55°	10.1
57.5°	4.5
60°	2.5
62.5°	2.0
65°	1.5
67.5°	1.5
70°	1.0
72.5°	1.0
75°	1.0
77.5°	0.5
80°	0.5
82.5°	0.5
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)