

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583152

Luminaire Tested: **HC6R60D010-HM64560827-62RMDC**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P583152
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-13)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC6R60D010-HM64560827-62RMDC
Description: HALO COMMERCIAL 6" ROUND, RETROFIT FRAME, WITH 6" MEDIUM DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5557.3 lumens
Efficiency: N/A
Efficacy: 101.0 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.08 / 0.96
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 55
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583152

CATALOG NUMBER: HC6R60D010-HM64560827-62RMDC

Luminous Intensity Polar Plot

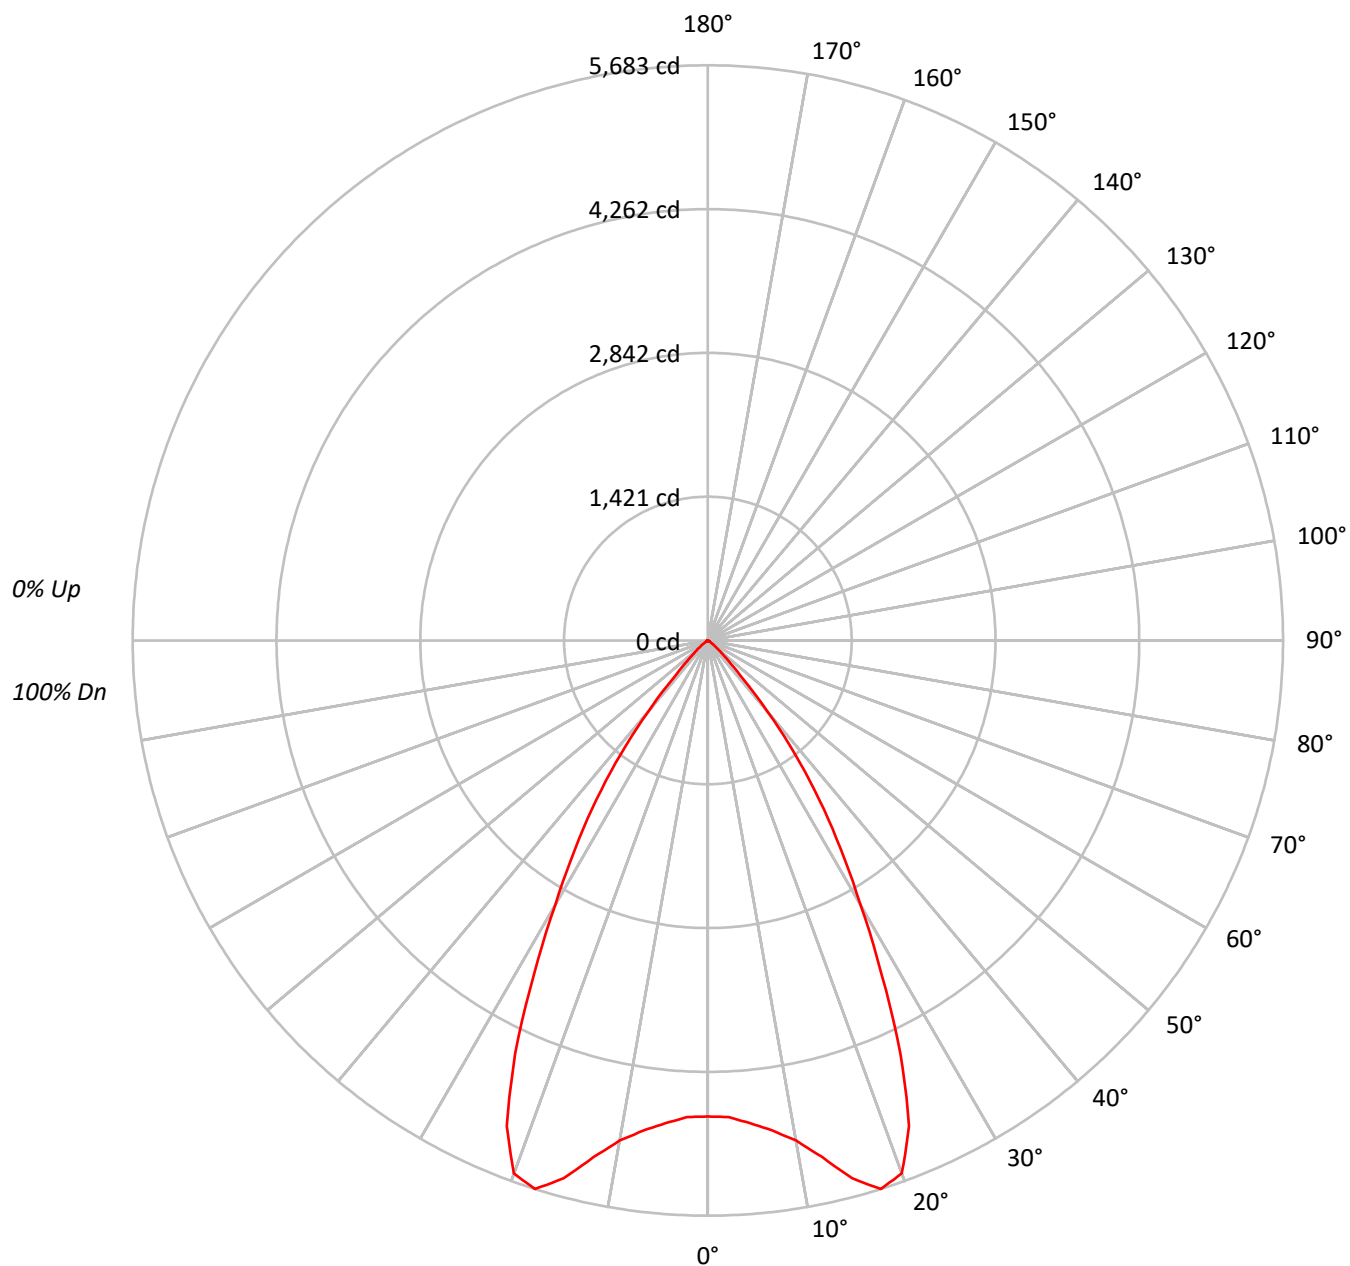



TEST NUMBER: P583152

CATALOG NUMBER: HC6R60D010-HM64560827-62RMDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	106	104	105	103	101		101	99	98		97
2	108	103	99	96	106	101	98	95	98	95	92		95	93	91		92
3	102	96	91	87	100	95	90	86	92	88	85		90	86	84		87
4	97	90	84	80	95	89	83	79	86	82	79		84	81	78		83
5	92	84	78	74	91	83	77	73	81	76	73		79	75	72		78
6	88	79	73	68	86	78	72	68	76	71	68		75	71	67		74
7	83	74	68	64	82	73	67	63	72	67	63		71	66	63		70
8	79	69	63	59	78	69	63	59	68	63	59		67	62	59		66
9	75	65	59	55	74	65	59	55	64	59	55		63	58	55		62
10	72	62	56	52	71	61	56	52	60	55	52		60	55	52		59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	257775
5°	263416
10°	279226
15°	312107
20°	326794
25°	272465
30°	190694
35°	128419
40°	66138
45°	22971
50°	10226
55°	3374
60°	1546
65°	1362
70°	1138
75°	741
80°	1105
85°	0



TEST NUMBER: P583152

CATALOG NUMBER: HC6R60D010-HM64560827-62RMDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	464.0	8.3
10°-20°	1549.5	27.9
20°-30°	2013.7	36.2
30°-40°	1189.5	21.4
40°-50°	283.8	5.1
50°-60°	41.8	0.8
60°-70°	10.4	0.2
70°-80°	4.2	0.1
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4027.2	72.5
0°-40°	5216.7	93.9
0°-60°	5542.2	99.7
0°-90°	5557.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5557.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4702	
5°	4787	464
15°	5499	1549
25°	4504	2014
35°	1919	1190
45°	296	284
55°	35	42
65°	10	10
75°	4	4
85°	0	0
90°	0	



TEST NUMBER: P583152

CATALOG NUMBER: HC6R60D010-HM64560827-62RMDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	4702.2
2.5°	4712.7
5°	4786.8
7.5°	4882.0
10°	5016.1
12.5°	5227.7
15°	5499.3
17.5°	5682.7
20°	5601.7
22.5°	5192.4
25°	4504.5
27.5°	3717.9
30°	3012.5
32.5°	2437.5
35°	1918.9
37.5°	1411.0
40°	924.2
42.5°	504.5
45°	296.3
47.5°	183.4
50°	119.9
52.5°	70.5
55°	35.3
57.5°	17.6
60°	14.1
62.5°	14.1
65°	10.5
67.5°	7.1
70°	7.1
72.5°	3.5
75°	3.5
77.5°	3.5
80°	3.5
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)