

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P593418

Luminaire Tested: **HC660D010-HM64560850-61MDC**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P593418
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC660D010-HM64560850-61MDC
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" MEDIUM DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 5000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6534.5 lumens
Efficiency: N/A
Efficacy: 118.8 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 0.96
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 55
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P593418

CATALOG NUMBER: HC660D010-HM64560850-61MDC

Luminous Intensity Polar Plot

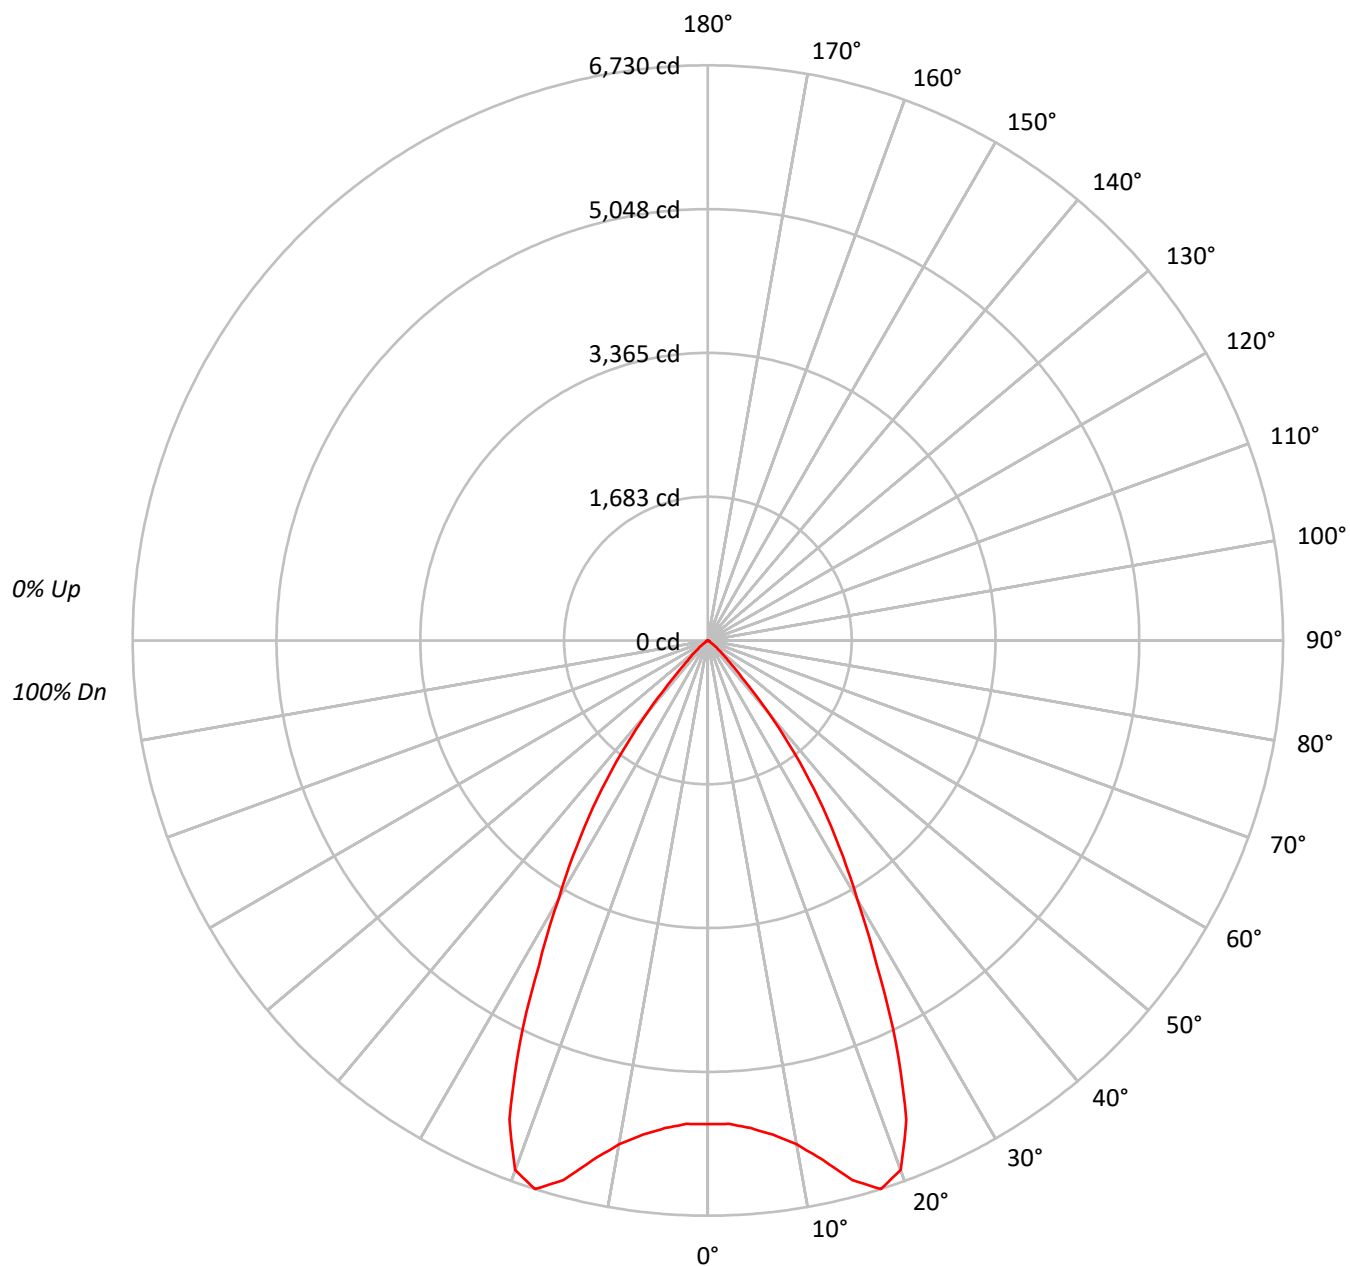



TEST NUMBER: P593418

CATALOG NUMBER: HC660D010-HM64560850-61MDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	106	104	105	103	101		101	99	98		97
2	108	103	99	96	106	101	98	95	98	95	93		95	93	91		92
3	102	96	91	87	100	95	90	86	92	88	85		90	86	84		87
4	97	90	84	80	95	89	83	79	86	82	79		84	81	78		83
5	92	84	78	74	91	83	78	73	81	76	73		80	75	72		78
6	88	79	73	68	86	78	72	68	76	71	68		75	71	67		74
7	83	74	68	64	82	73	68	63	72	67	63		71	66	63		70
8	79	70	63	59	78	69	63	59	68	63	59		67	62	59		66
9	75	66	60	56	74	65	59	55	64	59	55		63	58	55		62
10	72	62	56	52	71	61	56	52	61	55	52		60	55	52		59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	310304
5°	315143
10°	333088
15°	370882
20°	384619
25°	315569
30°	221123
35°	150865
40°	78583
45°	27623
50°	12375
55°	3966
60°	2270
65°	1608
70°	1330
75°	868
80°	0
85°	0



TEST NUMBER: P593418

CATALOG NUMBER: HC660D010-HM64560850-61MDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	554.7	8.5
10°-20°	1837.8	28.1
20°-30°	2340.1	35.8
30°-40°	1394.6	21.3
40°-50°	338.2	5.2
50°-60°	51.9	0.8
60°-70°	12.7	0.2
70°-80°	4.3	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4732.7	72.4
0°-40°	6127.3	93.8
0°-60°	6517.4	99.7
0°-90°	6534.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6534.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5660	
5°	5727	555
15°	6535	1838
25°	5217	2340
35°	2254	1395
45°	356	338
55°	42	52
65°	12	13
75°	4	4
85°	0	0
90°	0	



TEST NUMBER: P593418

CATALOG NUMBER: HC660D010-HM64560850-61MDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	5660.4
2.5°	5660.4
5°	5726.8
7.5°	5830.3
10°	5983.7
12.5°	6224.0
15°	6534.9
17.5°	6729.6
20°	6592.9
22.5°	6066.6
25°	5217.1
27.5°	4280.6
30°	3493.2
32.5°	2855.1
35°	2254.3
37.5°	1661.7
40°	1098.1
42.5°	592.5
45°	356.3
47.5°	223.8
50°	145.1
52.5°	87.1
55°	41.5
57.5°	24.8
60°	20.7
62.5°	16.5
65°	12.4
67.5°	8.3
70°	8.3
72.5°	4.1
75°	4.1
77.5°	4.1
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)