

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583237

Luminaire Tested: **HC660D010-HM64560930-61WDW**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P583237
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-9)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC660D010-HM64560930-61WDW
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, WHITE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5114.4 lumens
Efficiency: N/A
Efficacy: 93.0 lumens/watt
Spacing Criteria (0/90/45): 1.11 / 1.11 / 1.09
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 55
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583237

CATALOG NUMBER: HC660D010-HM64560930-61WDW

Luminous Intensity Polar Plot

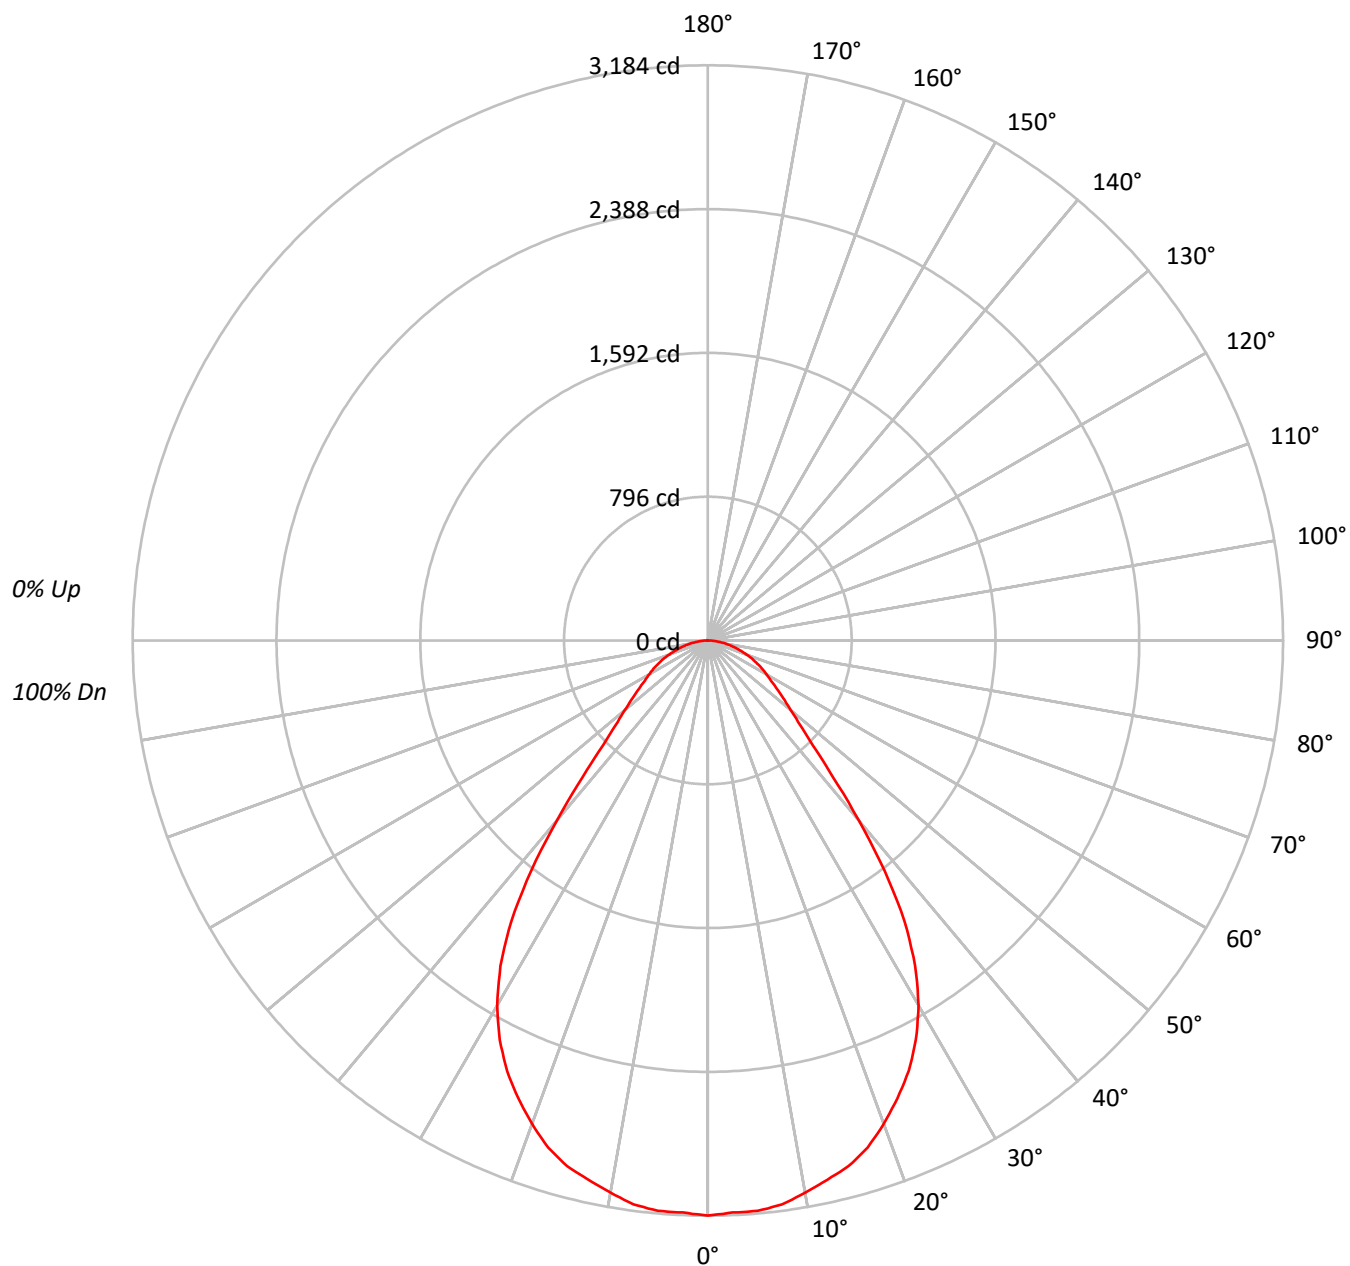



TEST NUMBER: P583237

CATALOG NUMBER: HC660D010-HM64560930-61WDW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10		50	30	10			50	30	10			50
RCR																				
0	119	119	119	119	116	116	116	116		111	111	111			106	106	106			102
1	111	107	104	101	108	105	102	99		101	98	96			97	95	93			94
2	103	97	91	87	101	95	90	86		91	87	84			88	85	82			85
3	96	87	81	76	94	86	80	75		83	78	74			81	76	72			78
4	89	80	72	67	87	78	72	66		76	70	66			74	69	65			72
5	84	73	65	60	82	72	65	59		70	64	59			68	63	58			66
6	78	67	59	54	76	66	59	54		64	58	53			63	57	53			61
7	73	62	54	49	72	61	54	49		60	53	48			58	52	48			57
8	69	57	50	45	68	57	50	45		55	49	44			54	48	44			53
9	65	53	46	41	64	53	46	41		52	45	41			51	45	41			50
10	61	50	43	38	60	49	42	38		48	42	38			47	42	38			47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	174525
5°	174422
10°	172737
15°	170943
20°	166119
25°	159100
30°	147656
35°	127040
40°	92738
45°	63541
50°	51077
55°	44519
60°	41082
65°	39070
70°	36497
75°	34122
80°	30938
85°	26418



TEST NUMBER: P583237

CATALOG NUMBER: HC660D010-HM64560930-61WDW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	300.5	5.9
10°-20°	845.9	16.5
20°-30°	1203.1	23.5
30°-40°	1158.3	22.6
40°-50°	666.5	13.0
50°-60°	422.3	8.3
60°-70°	298.9	5.8
70°-80°	170.4	3.3
80°-90°	48.6	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2349.5	45.9
0°-40°	3507.8	68.6
0°-60°	4596.5	89.9
0°-90°	5114.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5114.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3184	
5°	3170	300
15°	3012	846
25°	2630	1203
35°	1898	1158
45°	820	666
55°	466	422
65°	301	299
75°	161	170
85°	42	49
90°	0	



TEST NUMBER: P583237

CATALOG NUMBER: HC660D010-HM64560930-61WDW

CANDELA DISTRIBUTION (FULL):

0°	
0°	3183.6
2.5°	3169.6
5°	3169.6
7.5°	3148.7
10°	3103.1
12.5°	3057.5
15°	3012.0
17.5°	2942.0
20°	2847.5
22.5°	2742.3
25°	2630.3
27.5°	2493.7
30°	2332.6
32.5°	2136.5
35°	1898.3
37.5°	1607.6
40°	1295.9
42.5°	1022.7
45°	819.6
47.5°	690.0
50°	598.9
52.5°	525.3
55°	465.8
57.5°	413.3
60°	374.7
62.5°	339.7
65°	301.2
67.5°	266.2
70°	227.7
72.5°	192.6
75°	161.1
77.5°	129.6
80°	98.0
82.5°	70.1
85°	42.0
87.5°	17.5
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)