

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583388

Luminaire Tested: **HC607D010-HM60525935-61MDH**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P583388
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC607D010-HM60525935-61MDH
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 808.0 lumens
Efficiency: N/A
Efficacy: 101.0 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 0.97
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583388

CATALOG NUMBER: HC607D010-HM60525935-61MDH

Luminous Intensity Polar Plot

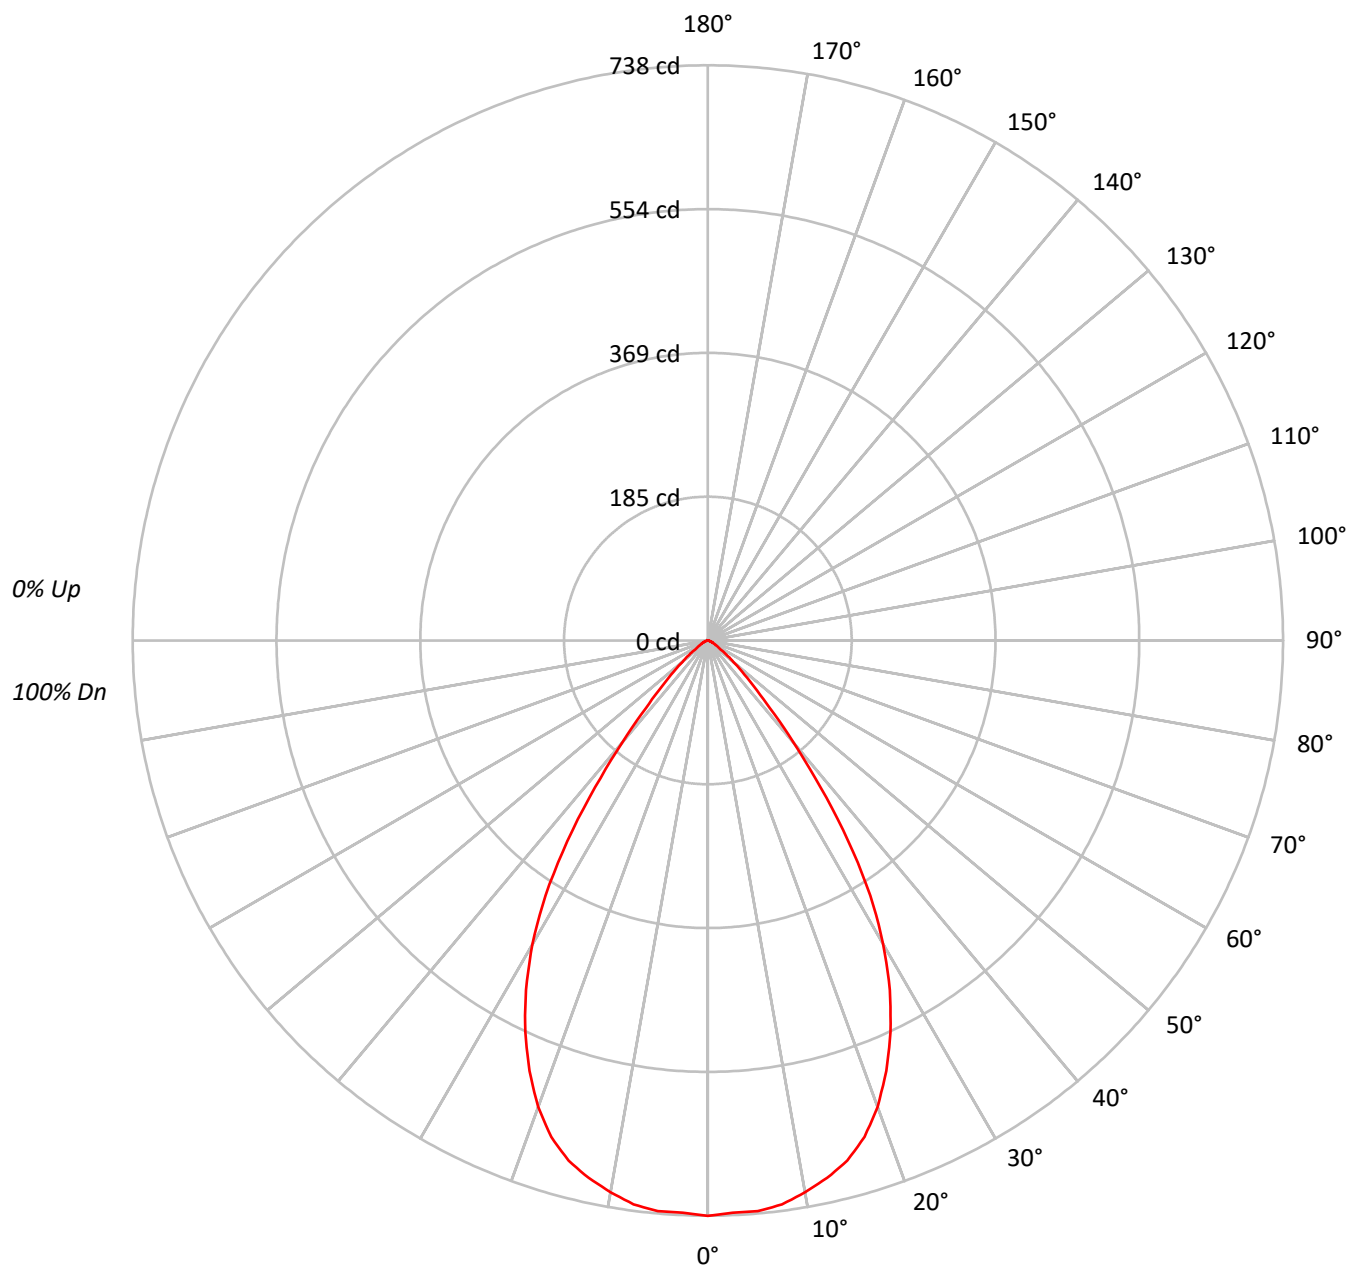



TEST NUMBER: P583388

CATALOG NUMBER: HC607D010-HM60525935-61MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	83		88	84	81		86
4	96	88	82	77	94	86	81	77	84	79	76		82	78	75		80
5	90	81	75	71	89	80	75	70	79	74	70		77	73	69		75
6	85	76	70	65	84	75	69	65	74	68	64		72	67	64		71
7	81	71	65	60	79	70	64	60	69	64	60		68	63	59		67
8	77	67	60	56	75	66	60	56	65	59	55		64	59	55		63
9	73	62	56	52	72	62	56	52	61	56	52		60	55	52		59
10	69	59	53	49	68	58	52	48	57	52	48		57	52	48		56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	40474
5°	40441
10°	40018
15°	39211
20°	37138
25°	33540
30°	28492
35°	21034
40°	12173
45°	6458
50°	3650
55°	1902
60°	1250
65°	882
70°	641
75°	487
80°	347
85°	377



TEST NUMBER: P583388

CATALOG NUMBER: HC607D010-HM60525935-61MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	69.6	8.6
10°-20°	193.2	23.9
20°-30°	252.2	31.2
30°-40°	192.7	23.9
40°-50°	69.8	8.6
50°-60°	20.3	2.5
60°-70°	7.2	0.9
70°-80°	2.5	0.3
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	515.1	63.7
0°-40°	707.8	87.6
0°-60°	797.9	98.7
0°-90°	808.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	808.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	738	
5°	735	70
15°	691	193
25°	554	252
35°	314	193
45°	83	70
55°	20	20
65°	7	7
75°	2	2
85°	1	0
90°	0	



TEST NUMBER: P583388

CATALOG NUMBER: HC607D010-HM60525935-61MDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	738.3
2.5°	734.9
5°	734.9
7.5°	729.7
10°	718.9
12.5°	706.3
15°	690.9
17.5°	668.0
20°	636.6
22.5°	597.9
25°	554.5
27.5°	505.4
30°	450.1
32.5°	387.9
35°	314.3
37.5°	237.4
40°	170.1
42.5°	117.5
45°	83.3
47.5°	59.9
50°	42.8
52.5°	30.3
55°	19.9
57.5°	14.3
60°	11.4
62.5°	9.2
65°	6.8
67.5°	5.7
70°	4.0
72.5°	2.8
75°	2.3
77.5°	1.7
80°	1.1
82.5°	0.6
85°	0.6
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)