

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P583397

Luminaire Tested: **HC607D010-HM60525935-61WDC**

Issue Date: 9/16/2021

Test Information

Test Method: LM-41-14
Report Number: P583397
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2105-241-7)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/16/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC607D010-HM60525935-61WDC
Description: HALO COMMERCIAL 6" ROUND, NEW CONSTRUCTION FRAME, WITH 6" WIDE DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 919.8 lumens
Efficiency: N/A
Efficacy: 115.0 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.28 / 1.09
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct


Input Watts (W): 8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P583397

CATALOG NUMBER: HC607D010-HM60525935-61WDC

Luminous Intensity Polar Plot

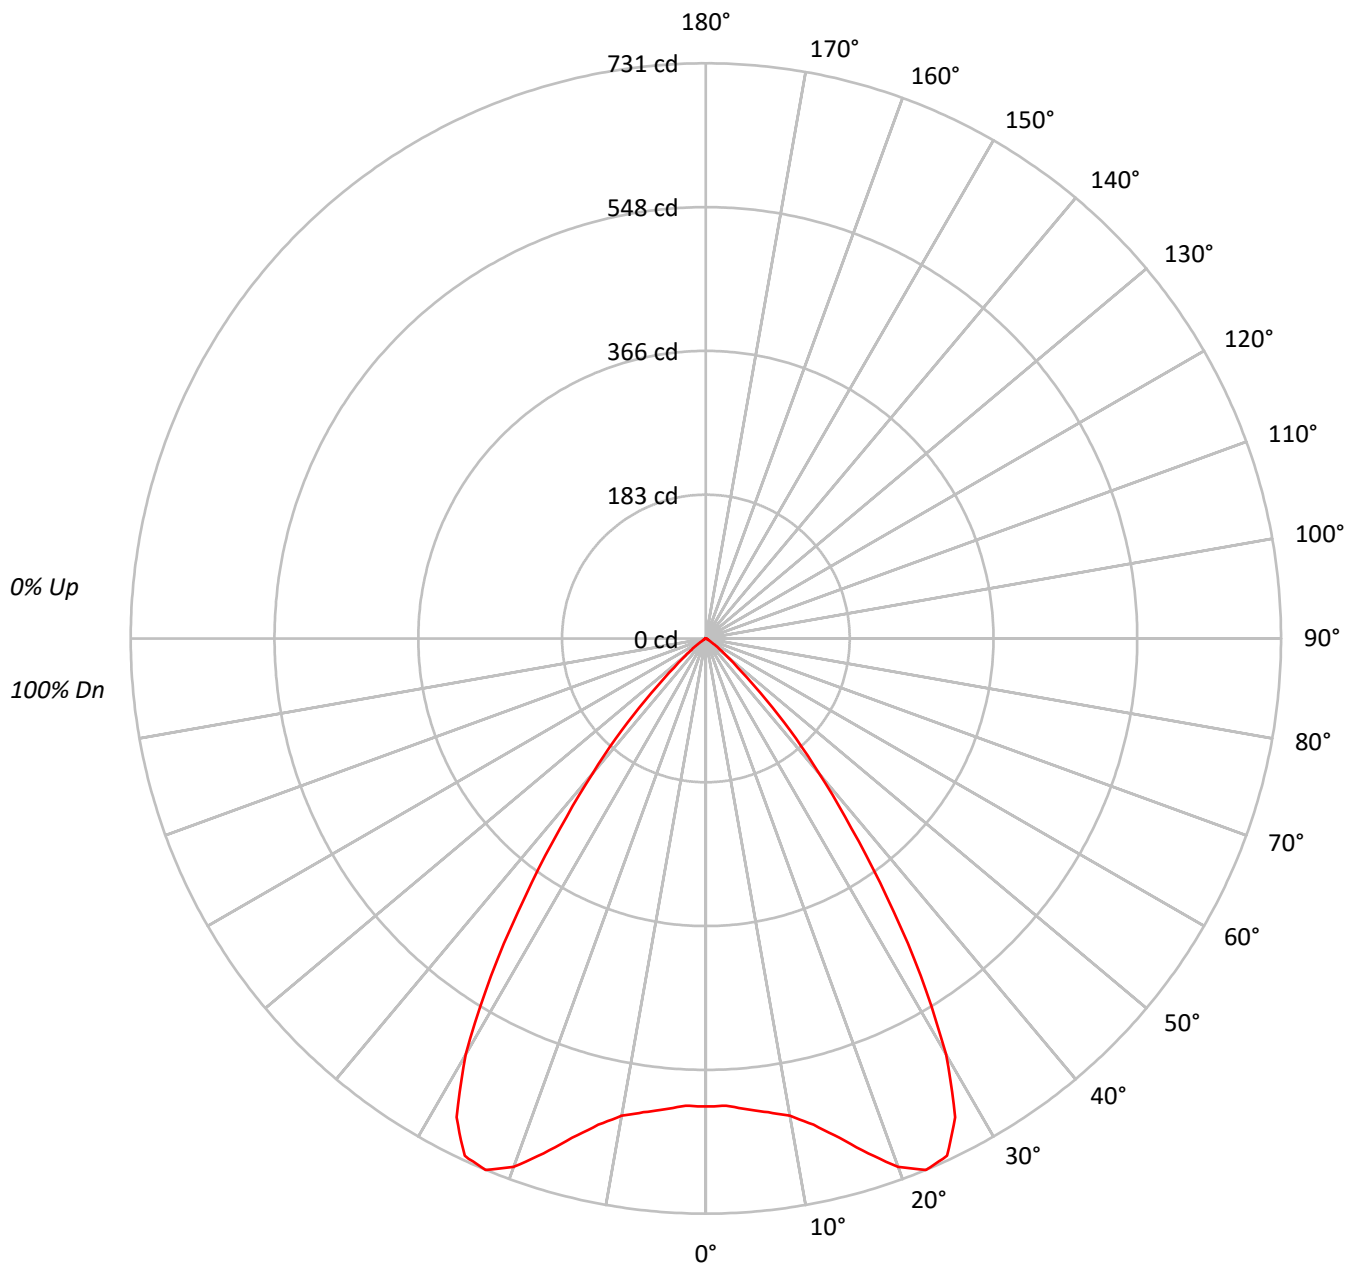



TEST NUMBER: P583397

CATALOG NUMBER: HC607D010-HM60525935-61WDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	97	94	105	100	96	93	97	94	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	82		88	84	81		85
4	95	87	81	77	93	86	80	76	84	79	75		82	78	74		80
5	90	81	75	70	88	80	74	70	78	73	69		76	72	68		75
6	85	75	69	64	83	74	68	64	73	67	63		71	67	63		70
7	80	70	63	59	79	69	63	59	68	62	58		67	62	58		66
8	76	65	59	54	74	65	59	54	64	58	54		62	57	54		61
9	71	61	55	50	70	60	54	50	60	54	50		59	53	50		58
10	68	57	51	47	67	57	51	47	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	32607
5°	33051
10°	34285
15°	37287
20°	41689
25°	43884
30°	38626
35°	26796
40°	15994
45°	7605
50°	2874
55°	1204
60°	373
65°	298
70°	176
75°	127
80°	189
85°	0



TEST NUMBER: P583397

CATALOG NUMBER: HC607D010-HM60525935-61WDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	57.8	6.3
10°-20°	188.7	20.5
20°-30°	323.3	35.1
30°-40°	251.1	27.3
40°-50°	83.0	9.0
50°-60°	12.7	1.4
60°-70°	2.2	0.2
70°-80°	0.8	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	569.7	61.9
0°-40°	820.8	89.2
0°-60°	916.5	99.6
0°-90°	919.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	919.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	595	
5°	601	58
15°	657	189
25°	726	323
35°	400	251
45°	98	83
55°	13	13
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P583397

CATALOG NUMBER: HC607D010-HM60525935-61WDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	594.8
2.5°	594.3
5°	600.6
7.5°	607.4
10°	615.9
12.5°	633.0
15°	657.0
17.5°	686.1
20°	714.6
22.5°	731.1
25°	725.5
27.5°	686.1
30°	610.2
32.5°	508.2
35°	400.4
37.5°	304.0
40°	223.5
42.5°	157.9
45°	98.1
47.5°	54.7
50°	33.7
52.5°	20.5
55°	12.6
57.5°	6.2
60°	3.4
62.5°	2.8
65°	2.3
67.5°	1.7
70°	1.1
72.5°	1.1
75°	0.6
77.5°	0.6
80°	0.6
82.5°	0.6
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)