

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: HALO

Report Number: P677517

Luminaire Tested: ML406FL9FS1E-TL40R2GMW-4000K

Issue Date: 4/25/2023

Test Information

Test Method: LM-79-2019
Report Number: P677517
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2304-979-1)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 4/25/2023
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: HALO
Catalog Number: ML406FL9FS1E-TL40R2GMW-4000K
Description: RETROFIT, CONICAL LENS TRIM
Light Source: (1) SELECTABLE LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 455.3 lumens
Efficiency: N/A
Efficacy: 54.9 lumens/watt
Spacing Criteria (0/90/45): 1.15 / 1.15 / 1.23
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 8.3
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P677517
CATALOG NUMBER: ML406FL9FS1E-TL40R2GMW-4000K

Luminous Intensity Polar Plot

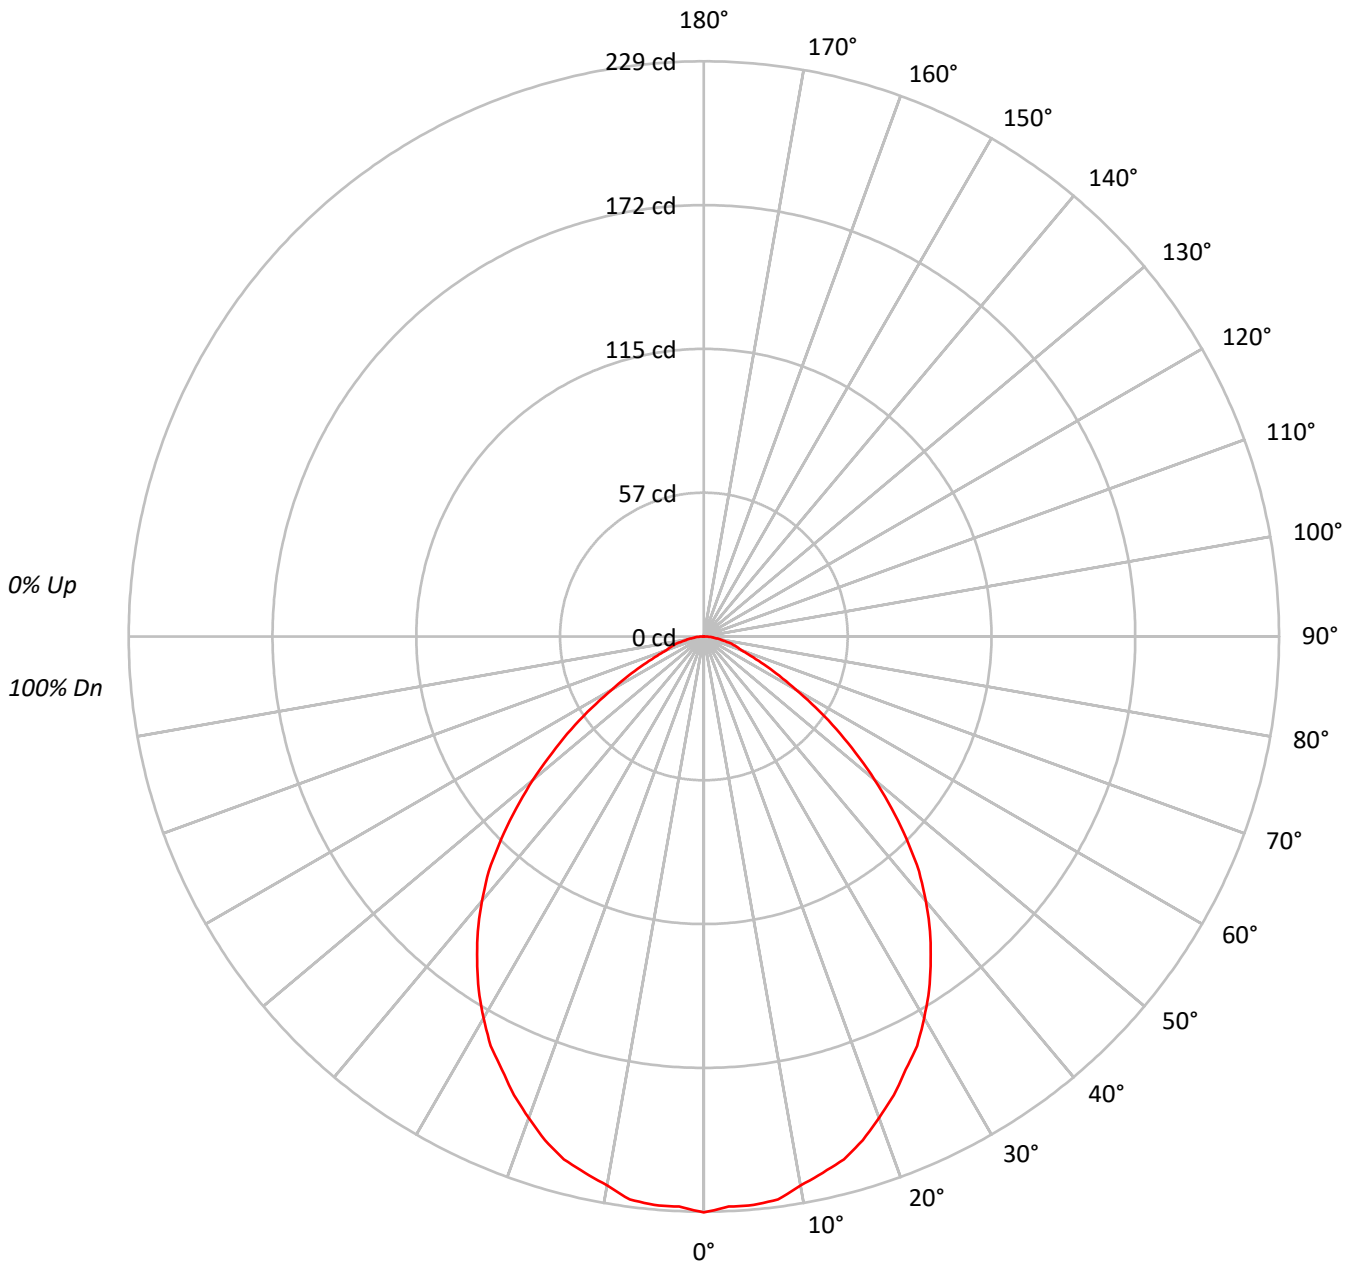



TEST NUMBER: P677517

CATALOG NUMBER: ML406FL9FS1E-TL40R2GMW-4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	103	100	108	105	102	99	101	98	96	97	95	93	93	92	90	88																			
2	103	96	90	85	100	94	89	84	90	86	82	87	84	80	84	81	79	77																			
3	95	86	79	73	92	84	78	73	81	76	71	79	74	70	76	72	69	67																			
4	88	77	70	64	86	76	69	63	74	67	62	71	66	62	69	65	61	59																			
5	81	70	62	56	79	69	61	56	67	60	55	65	59	55	63	58	54	52																			
6	76	64	56	50	74	63	55	50	61	54	49	59	53	49	58	53	48	47																			
7	70	58	50	45	69	57	50	45	56	49	44	55	48	44	53	48	44	42																			
8	66	53	46	40	64	53	45	40	52	45	40	50	44	40	49	44	40	38																			
9	62	49	42	37	60	49	42	37	48	41	36	47	41	36	46	40	36	34																			
10	58	46	38	34	57	45	38	33	44	38	33	43	37	33	43	37	33	31																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	28283
5°	28131
10°	27793
15°	27519
20°	26764
25°	25886
30°	24982
35°	23701
40°	22124
45°	19903
50°	17040
55°	13871
60°	10435
65°	7705
70°	5698
75°	5528
80°	4475
85°	4529

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 19903 cd/sqm



TEST NUMBER: P677517
 CATALOG NUMBER: ML406FL9FS1E-TL40R2GMW-4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	21.5	4.7
10°-20°	60.5	13.3
20°-30°	87.7	19.3
30°-40°	98.3	21.6
40°-50°	87.6	19.3
50°-60°	57.7	12.7
60°-70°	27.0	5.9
70°-80°	11.8	2.6
80°-90°	3.2	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	169.8	37.3
0°-40°	268.0	58.9
0°-60°	413.3	90.8
0°-90°	455.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	455.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	229	
5°	227	22
15°	216	61
25°	190	88
35°	157	98
45°	114	88
55°	64	58
65°	26	27
75°	12	12
85°	3	3
90°	0	



TEST NUMBER: P677517
CATALOG NUMBER: ML406FL9FS1E-TL40R2GMW-4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	229.3
2.5°	227.2
5°	227.2
7.5°	226.1
10°	221.9
12.5°	218.7
15°	215.5
17.5°	210.3
20°	203.9
22.5°	197.6
25°	190.2
27.5°	183.8
30°	175.4
32.5°	166.9
35°	157.4
37.5°	147.9
40°	137.4
42.5°	126.8
45°	114.1
47.5°	101.4
50°	88.8
52.5°	76.1
55°	64.5
57.5°	52.8
60°	42.3
62.5°	33.8
65°	26.4
67.5°	20.1
70°	15.8
72.5°	13.7
75°	11.6
77.5°	8.5
80°	6.3
82.5°	4.2
85°	3.2
87.5°	1.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)