

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO

Report Number: H35157

Luminaire Tested: **H7ICT-4041P**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: H35157
Test Lab:
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO
Catalog Number: H7ICT-4041P
Description: HALO 7" RECESSED DOWNLIGHT
OPEN REFLECTOR - SELF FLANGED - WHITE
SOCKET POSITION FIXED
Light Source: 60A19 60 WATTS 860 LUMENS
A19 INSIDE FROSTED
Ballast/Driver: -

Summary


Lumens per Lamp: 860 (1 lamp)
Luminaire Lumens: 549.0 lumens
Efficiency: 63.8%
Efficacy: 9.2 lumens/watt
Spacing Criteria (0/90/45): 1.43 / 1.43 / 1.49
Luminous Opening: (L: 0 ' x W: -0.48 ' x H: 0 '
CIE Type: Direct

Input Watts (W): 60
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: H35157
CATALOG NUMBER: H7ICT-4041P

Luminous Intensity Polar Plot

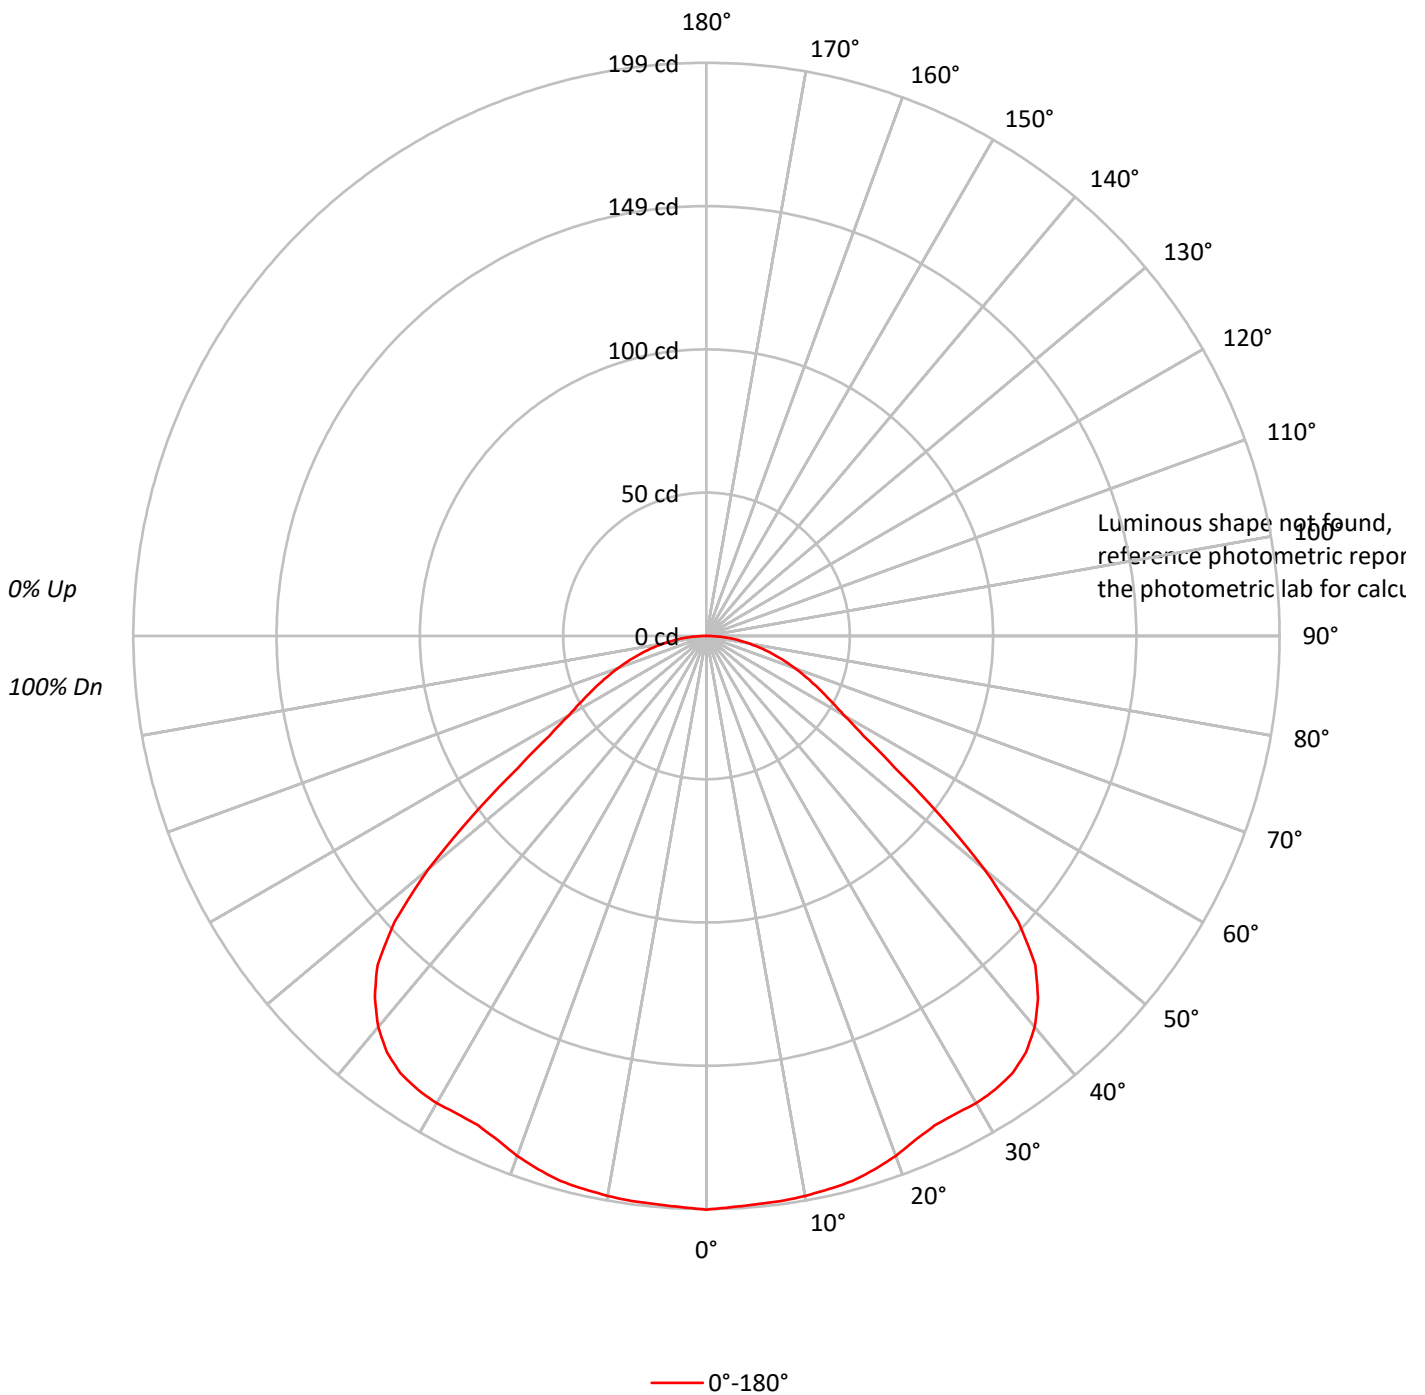




TEST NUMBER: H35157
 CATALOG NUMBER: H7ICT-4041P

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	76	76	76	76	74	74	74	74	71	71	71		68	68	68		65	65	65	64
1	70	67	65	63	68	66	64	62	63	61	60		61	59	58		58	57	56	55
2	64	59	55	52	63	58	55	51	56	53	50		54	51	49		52	50	48	47
3	59	53	48	44	57	52	47	44	50	46	43		48	45	42		46	44	41	40
4	54	47	42	38	53	46	41	37	45	40	37		43	39	36		42	39	36	35
5	50	42	37	33	49	41	36	33	40	36	32		39	35	32		38	34	31	30
6	46	38	33	29	45	37	32	29	36	32	28		35	31	28		34	31	28	27
7	43	35	29	25	42	34	29	25	33	28	25		32	28	25		31	28	25	24
8	40	32	26	23	39	31	26	23	30	26	22		29	25	22		29	25	22	21
9	37	29	24	20	36	29	24	20	28	23	20		27	23	20		27	23	20	19
10	35	27	22	18	34	26	22	18	26	21	18		25	21	18		25	21	18	17

AVERAGE LUMINANCE (cd/sqm):

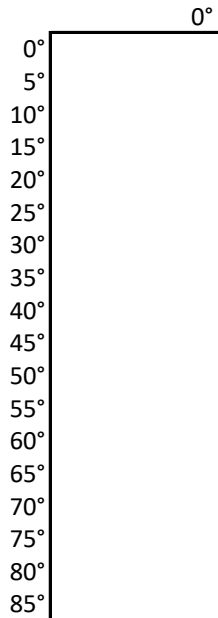



TEST NUMBER: H35157
 CATALOG NUMBER: H7ICT-4041P

ZONAL LUMENS:

Zone	Lumens	% Fixture	% Lamp
0°-10°	18.9	3.4	2.2
10°-20°	55.3	10.1	6.4
20°-30°	87.2	15.9	10.1
30°-40°	115.6	21.0	13.4
40°-50°	121.5	22.1	14.1
50°-60°	74.9	13.6	8.7
60°-70°	42.7	7.8	5.0
70°-80°	24.9	4.5	2.9
80°-90°	8.2	1.5	1.0
90°-100°	0.0	0.0	0.0
100°-110°	0.0	0.0	0.0
110°-120°	0.0	0.0	0.0
120°-130°	0.0	0.0	0.0
130°-140°	0.0	0.0	0.0
140°-150°	0.0	0.0	0.0
150°-160°	0.0	0.0	0.0
160°-170°	0.0	0.0	0.0
170°-180°	0.0	0.0	0.0
0°-30°	161.4	29.4	18.8
0°-40°	276.9	50.4	32.2
0°-60°	473.3	86.2	55.0
0°-90°	549.0	100.0	63.8
90°-120°	0.0	0.0	0.0
90°-150°	0.0	0.0	0.0
90°-180°	0.0	0.0	0.0
0°-180°	549.0	100.0	63.8

CANDELA DISTRIBUTION:

	0°	Flux
0°	199	
5°	198	19
15°	196	55
25°	188	87
35°	185	116
45°	162	122
55°	80	75
65°	43	43
75°	24	25
85°	8	8
90°	0	1
95°	0	0
105°	0	0
115°	0	0
125°	0	0
135°	0	0
145°	0	0
155°	0	0
165°	0	0
175°	0	0
180°	0	0



TEST NUMBER: H35157
CATALOG NUMBER: H7ICT-4041P

CANDELA DISTRIBUTION (FULL):

0°	
0°	199.2
2.5°	198.5
5°	198.1
7.5°	197.9
10°	197.4
12.5°	196.7
15°	195.9
17.5°	194.2
20°	192.1
22.5°	189.4
25°	187.5
27.5°	187.1
30°	187.3
32.5°	186.7
35°	185.3
37.5°	182.2
40°	177.3
42.5°	170.4
45°	161.5
47.5°	146.8
50°	125.9
52.5°	101.7
55°	79.8
57.5°	64.7
60°	55.1
62.5°	48.4
65°	42.7
67.5°	37.5
70°	32.6
72.5°	27.9
75°	23.5
77.5°	19.1
80°	15.0
82.5°	11.1
85°	7.5
87.5°	4.0
90°	0.0
92.5°	0.0
95°	0.0
97.5°	0.0
100°	0.0
102.5°	0.0
105°	0.0
107.5°	0.0
110°	0.0



TEST NUMBER: H35157
CATALOG NUMBER: H7ICT-4041P

CANDELA DISTRIBUTION (continued):

	0°
112.5°	0.0
115°	0.0
117.5°	0.0
120°	0.0
122.5°	0.0
125°	0.0
127.5°	0.0
130°	0.0
132.5°	0.0
135°	0.0
137.5°	0.0
140°	0.0
142.5°	0.0
145°	0.0
147.5°	0.0
150°	0.0
152.5°	0.0
155°	0.0
157.5°	0.0
160°	0.0
162.5°	0.0
165°	0.0
167.5°	0.0
170°	0.0
172.5°	0.0
175°	0.0
177.5°	0.0
180°	0.0

(END OF REPORT)