

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: INVUE

Report Number: P147729

Luminaire Tested: **VXS-E06-LED-E1-5WQ-7030**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P147729
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P33675)
Test Lab: INNOVATION CENTER-P3
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: INVUE
Catalog Number: VXS-E06-LED-E1-5WQ-7030
Description: VISION SITE SMALL LED LUMINAIRE
(6) LIGHTBARS WITH AccuLED OPTICS - TYPE 5 SQUARE WIDE
Light Source: (126) 3000K CCT, 70 CRI LEDs
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 17447.5 lumens
Efficiency: N/A
Efficacy: 115.9 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 1' x H: 0')
IES Classification: Type V - Short - Semi-Cutoff
BUG Rating: B4 - U0 - G3

Input Watts (W): 150.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT




REPORT NUMBER: P147729

CATALOG NUMBER: VXS-E06-LED-E1-5WQ-7030

Iso-Footcandle Lines of Horizontal Illumination

× Max cd

--- 1/2 Max cd

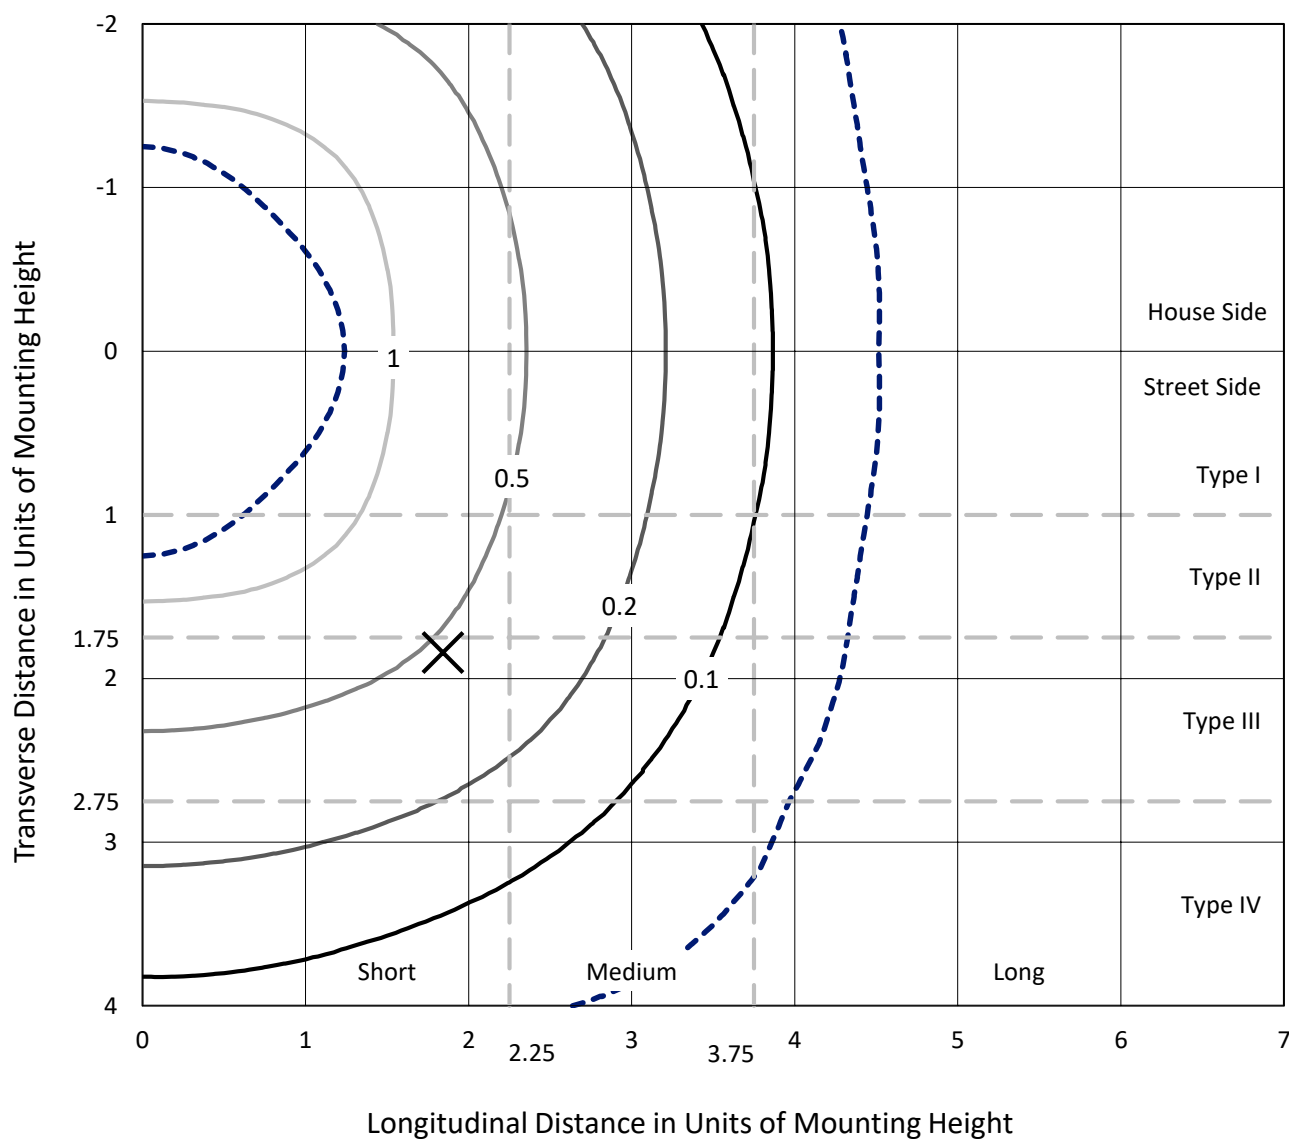


Based on 25 foot mounting height. Maximum calculated value = 1.7 fc
Type V - Short - Semi-Cutoff

REPORT NUMBER: P147729

CATALOG NUMBER: VXS-E06-LED-E1-5WQ-7030

Luminous Intensity Polar Plot

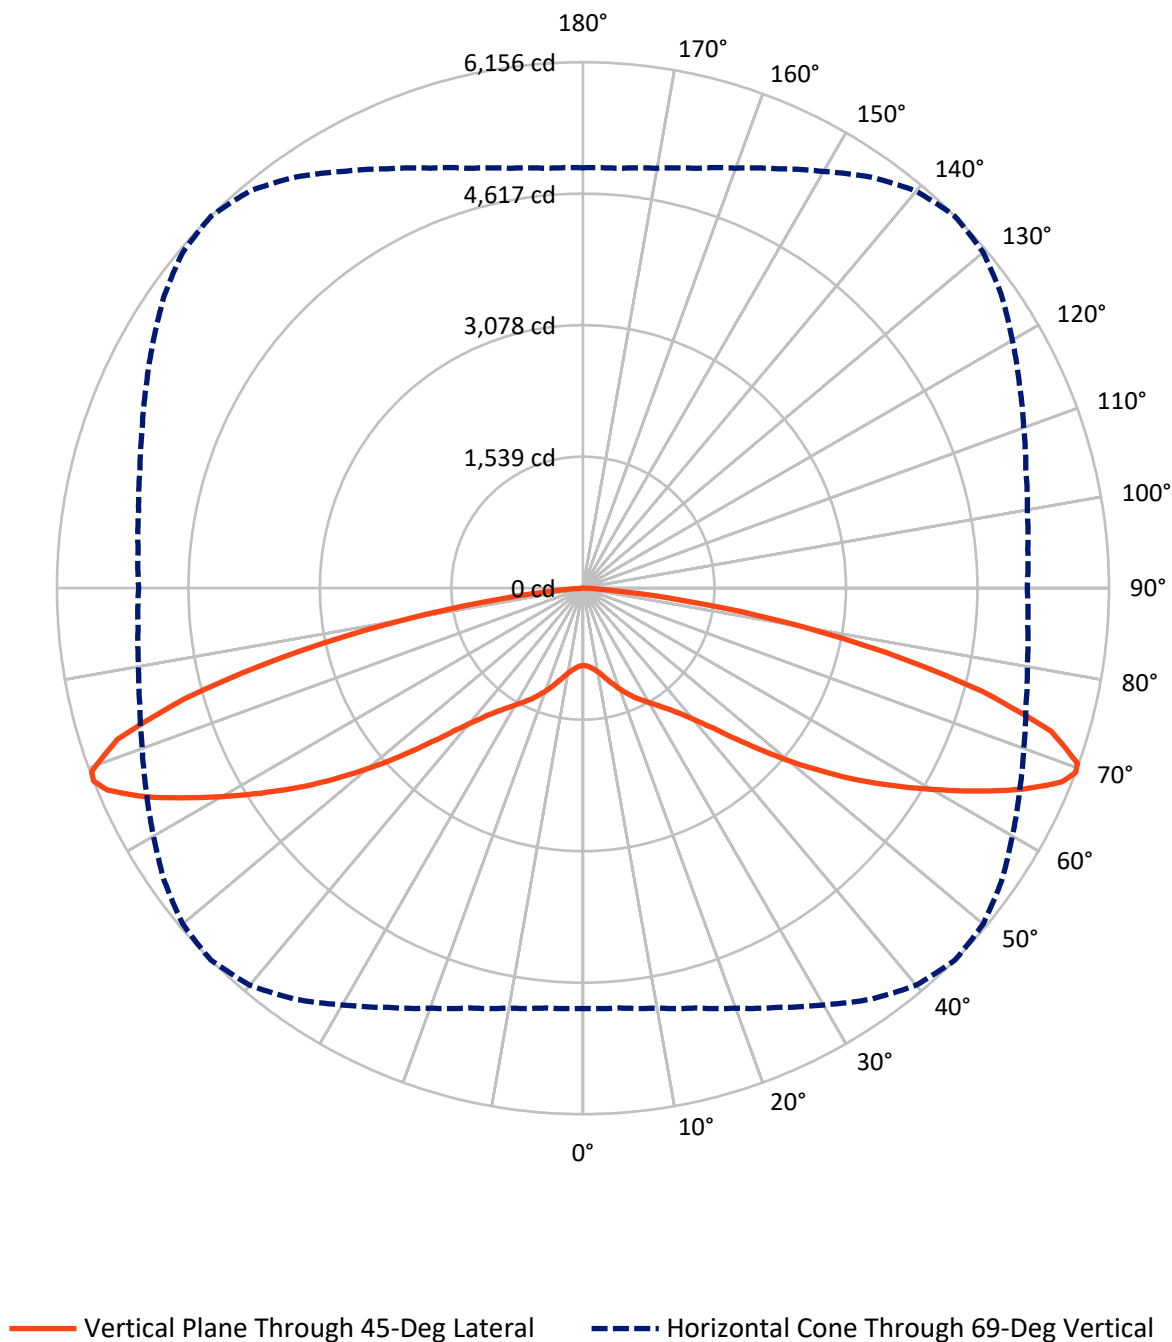

REPORT NUMBER: P147729

CATALOG NUMBER: VXS-E06-LED-E1-5WQ-7030

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	8723.8	0.0	8723.8
	% Fixture	50.0	0.0	50.0
Street Side	Lumens	8723.8	0.0	8723.8
	% Fixture	50.0	0.0	50.0
Total	Lumens	17447.5	0.0	17447.5
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	91.0	0.5
10°-20°	321.3	1.8
20°-30°	650.5	3.7
30°-40°	1090.6	6.3
40°-50°	1923.8	11.0
50°-60°	3392.6	19.4
60°-70°	5179.5	29.7
70°-80°	4328.0	24.8
80°-90°	470.3	2.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	17447.5	100.0
0°-180°	17447.5	100.0

Coefficient of Utilization



REPORT NUMBER: P147729


CATALOG NUMBER: VXS-E06-LED-E1-5WQ-7030

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	531.4	3.0			
FM	(30°-60°)	3203.5	18.4			
FH	(60°-80°)	4753.7	27.2			G2/5000
FVH	(80°-90°)	235.1	1.3			G3/500
BL	(0°-30°)	531.4	3.0	B2/1000		
BM	(30°-60°)	3203.5	18.4	B3/5000		
BH	(60°-80°)	4753.7	27.2	B4/5000		G2/5000
BVH	(80°-90°)	235.1	1.3			G3/500
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B4-U0-G3

Type V Short

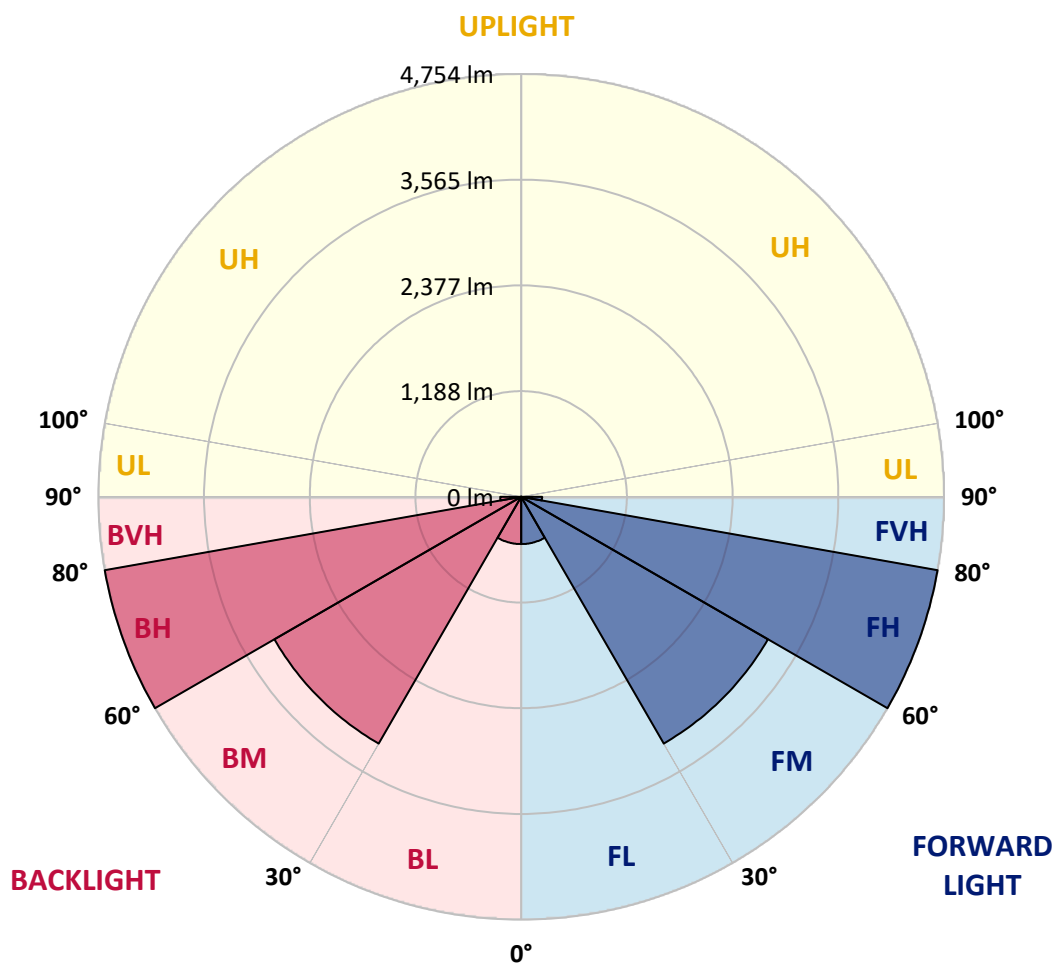

REPORT NUMBER: P147729

CATALOG NUMBER: VXS-E06-LED-E1-5WQ-7030

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	906.0	906.0	906.0	906.0	906.0	906.0	906.0	906.0	906.0	906.0	906.0
2.5°	913.4	915.1	913.4	913.4	913.4	913.4	913.4	911.5	911.5	911.5	913.4
5°	931.6	933.5	931.6	933.5	933.5	933.5	933.5	931.6	931.6	931.6	931.6
7.5°	960.8	960.8	960.8	962.7	960.8	960.8	962.7	960.8	960.8	960.8	960.8
10°	1002.9	1001.0	1001.0	1001.0	1001.0	1001.0	1002.9	1002.9	1002.9	1001.0	1001.0
12.5°	1054.0	1052.2	1054.0	1054.0	1055.9	1055.9	1055.9	1055.9	1055.9	1055.9	1054.0
15°	1116.2	1116.2	1116.2	1117.9	1121.6	1121.6	1119.8	1121.6	1121.6	1121.6	1121.6
17.5°	1185.5	1189.2	1185.5	1187.4	1189.2	1187.4	1191.0	1192.8	1194.6	1192.8	1187.4
20°	1256.8	1258.5	1258.5	1258.5	1258.5	1262.3	1264.0	1264.0	1269.5	1267.8	1265.9
22.5°	1324.4	1328.0	1328.0	1329.8	1329.8	1335.3	1335.3	1335.3	1339.0	1342.6	1339.0
25°	1395.6	1393.8	1393.8	1397.4	1399.3	1406.5	1406.5	1410.3	1415.6	1417.5	1413.9
27.5°	1459.6	1457.7	1457.7	1463.2	1465.0	1474.2	1474.2	1481.5	1485.1	1486.9	1483.3
30°	1527.2	1527.2	1525.3	1530.8	1536.3	1543.5	1547.3	1554.5	1560.0	1561.9	1558.1
32.5°	1607.5	1603.8	1605.7	1609.3	1613.0	1620.3	1625.8	1634.9	1642.2	1644.0	1640.4
35°	1698.9	1693.4	1695.1	1698.9	1704.4	1715.2	1724.5	1729.8	1740.8	1744.5	1737.2
37.5°	1799.3	1801.1	1799.3	1808.4	1817.6	1830.4	1841.3	1848.6	1859.6	1865.1	1859.6
40°	1941.8	1936.3	1941.8	1950.9	1965.5	1982.0	2003.9	2009.3	2020.3	2031.3	2018.5
42.5°	2126.3	2122.6	2135.4	2142.7	2159.2	2177.4	2204.9	2219.5	2235.9	2243.2	2232.2
45°	2367.4	2367.4	2382.0	2383.8	2409.4	2433.2	2471.5	2489.8	2520.8	2520.8	2520.8
47.5°	2634.1	2645.1	2654.2	2672.4	2690.8	2734.6	2773.0	2813.2	2842.4	2846.0	2840.5
50°	2909.9	2920.9	2948.3	2973.9	3014.1	3068.8	3110.9	3163.8	3189.4	3211.3	3204.0
52.5°	3215.0	3216.8	3249.7	3282.6	3341.0	3401.3	3468.9	3523.7	3569.3	3589.4	3573.1
55°	3549.3	3553.0	3582.2	3616.9	3682.6	3752.0	3836.1	3892.7	3951.2	3987.7	3960.3
57.5°	3911.0	3912.7	3942.0	3984.0	4062.6	4132.0	4212.3	4292.7	4347.6	4380.4	4362.2
60°	4311.0	4320.1	4342.1	4395.0	4469.9	4543.0	4623.4	4694.6	4758.5	4793.3	4775.0
62.5°	4738.4	4747.6	4778.7	4820.6	4886.4	4966.8	5043.5	5134.8	5187.9	5226.2	5198.8
65°	5025.3	5041.7	5091.0	5147.7	5244.5	5348.6	5438.1	5562.3	5626.2	5671.9	5646.3
67.5°	5043.5	5052.6	5113.0	5198.8	5328.5	5485.6	5668.3	5861.9	5987.9	6048.2	6004.4
69°	4919.3	4932.1	4990.6	5087.4	5231.7	5414.3	5631.7	5872.8	6066.4	6156.0	6114.0
70°	4778.7	4806.0	4869.9	4976.0	5116.6	5308.4	5533.1	5790.7	6017.2	6139.6	6108.5
72.5°	4482.7	4490.1	4532.0	4616.1	4723.8	4882.8	5094.7	5337.6	5553.2	5728.5	5754.1
75°	3978.5	4002.3	4033.4	4089.9	4144.8	4259.9	4402.4	4568.6	4694.6	4829.8	4835.2
77.5°	3006.7	3078.0	3101.8	3114.5	3138.2	3229.6	3353.8	3498.1	3602.3	3624.1	3620.5
80°	1349.9	1444.9	1466.8	1571.0	1634.9	1786.5	1976.5	2197.5	2345.5	2362.0	2321.8
82.5°	264.9	283.1	330.7	412.8	562.6	652.1	776.4	931.6	1074.1	1156.3	1106.9
85°	87.7	93.2	107.8	118.8	137.0	155.2	188.2	233.8	290.5	321.5	286.8
87.5°	34.7	34.7	40.2	43.8	47.5	47.5	47.5	43.8	42.0	34.7	31.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P147729

CATALOG NUMBER: VXS-E06-LED-E1-5WQ-7030

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	906.0	906.0	906.0	906.0	906.0	906.0	906.0	906.0
2.5°	911.5	911.5	911.5	911.5	911.5	911.5	911.5	911.5
5°	931.6	929.7	929.7	928.0	928.0	928.0	928.0	928.0
7.5°	959.1	957.2	955.3	957.2	955.3	955.3	955.3	955.3
10°	1001.0	997.4	995.5	993.7	993.7	993.7	991.9	991.9
12.5°	1050.4	1050.4	1048.5	1046.7	1043.0	1044.9	1043.0	1039.4
15°	1117.9	1114.3	1112.4	1110.7	1106.9	1106.9	1106.9	1105.2
17.5°	1185.5	1181.9	1181.9	1176.4	1174.6	1174.6	1174.6	1176.4
20°	1260.4	1254.9	1251.3	1247.7	1243.9	1245.8	1242.2	1245.8
22.5°	1335.3	1328.0	1324.4	1318.9	1313.4	1313.4	1311.6	1307.9
25°	1408.4	1399.3	1395.6	1390.2	1382.8	1382.8	1379.2	1375.5
27.5°	1477.8	1468.7	1465.0	1454.1	1446.7	1444.9	1441.2	1439.5
30°	1554.5	1543.5	1538.0	1527.2	1516.2	1514.3	1508.8	1508.8
32.5°	1634.9	1623.9	1620.3	1603.8	1594.7	1594.7	1591.1	1587.4
35°	1735.3	1719.0	1715.2	1698.9	1686.0	1686.0	1682.4	1684.2
37.5°	1854.1	1841.3	1828.5	1815.8	1801.1	1799.3	1795.6	1792.0
40°	2013.1	1998.4	1983.8	1965.5	1952.7	1949.1	1943.6	1941.8
42.5°	2224.9	2210.3	2181.0	2166.4	2153.7	2142.7	2140.9	2139.1
45°	2495.2	2477.0	2456.9	2429.5	2413.1	2389.3	2385.7	2376.6
47.5°	2820.4	2785.7	2751.0	2727.3	2701.7	2674.3	2668.8	2654.2
50°	3165.7	3138.2	3079.8	3041.5	3001.2	2973.9	2955.6	2950.2
52.5°	3536.5	3485.4	3426.8	3375.8	3317.3	3280.7	3247.9	3238.8
55°	3923.7	3850.7	3777.6	3717.3	3658.9	3615.0	3583.9	3569.3
57.5°	4311.0	4230.7	4150.3	4084.5	4035.2	3978.5	3947.5	3940.2
60°	4714.7	4638.0	4555.8	4490.1	4429.7	4380.4	4362.2	4327.5
62.5°	5142.2	5061.8	4985.1	4921.1	4844.5	4809.7	4778.7	4758.5
65°	5562.3	5469.1	5372.3	5304.8	5228.0	5178.7	5140.3	5113.0
67.5°	5887.5	5746.8	5617.1	5503.8	5399.7	5323.0	5273.7	5248.1
69°	5978.8	5803.4	5637.2	5489.2	5366.8	5281.0	5226.2	5200.6
70°	5967.9	5774.2	5591.5	5428.9	5295.6	5204.2	5151.3	5103.8
72.5°	5629.8	5452.7	5249.9	5072.7	4952.2	4864.5	4811.5	4785.9
75°	4804.2	4685.5	4539.4	4402.4	4314.7	4263.5	4197.7	4199.6
77.5°	3498.1	3501.8	3403.1	3262.5	3163.8	3145.6	3116.4	3087.2
80°	2170.2	1996.6	1883.3	1731.7	1620.3	1523.4	1481.5	1390.2
82.5°	1001.0	781.9	606.4	458.5	352.5	275.9	241.1	197.3
85°	222.9	169.8	140.6	113.3	96.8	89.5	73.1	67.6
87.5°	31.1	27.4	25.6	23.7	20.1	14.6	11.0	9.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)