

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: INVUE

Report Number: P150474

Luminaire Tested: **VXS-F05-LED-E1-SL3-HSS-7030**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P150474
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P33727)
Test Lab: INNOVATION CENTER-P3
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: INVUE
Catalog Number: VXS-F05-LED-E1-SL3-HSS-7030
Description: VISION SITE SMALL LED LUMINAIRE
(5) LIGHTBARS WITH AccuLED OPTICS - TYPE 3 W/ SPILL LIGHT CONTROL AND
HOUSE SIDE SHIELD
Light Source: (35) 3000K CCT, 70 CRI LEDs
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6536.5 lumens
Efficiency: N/A
Efficacy: 49.0 lumens/watt
Luminous Opening: Rectangular (W 0.83' x L: 1' x H: 0')
IES Classification: Type III - Short - Non-Cutoff
BUG Rating: B0 - U0 - G2

Input Watts (W): 133.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT




REPORT NUMBER: P150474

CATALOG NUMBER: VXS-F05-LED-E1-SL3-HSS-7030

Iso-Footcandle Lines of Horizontal Illumination

× Max cd
- - - 1/2 Max cd

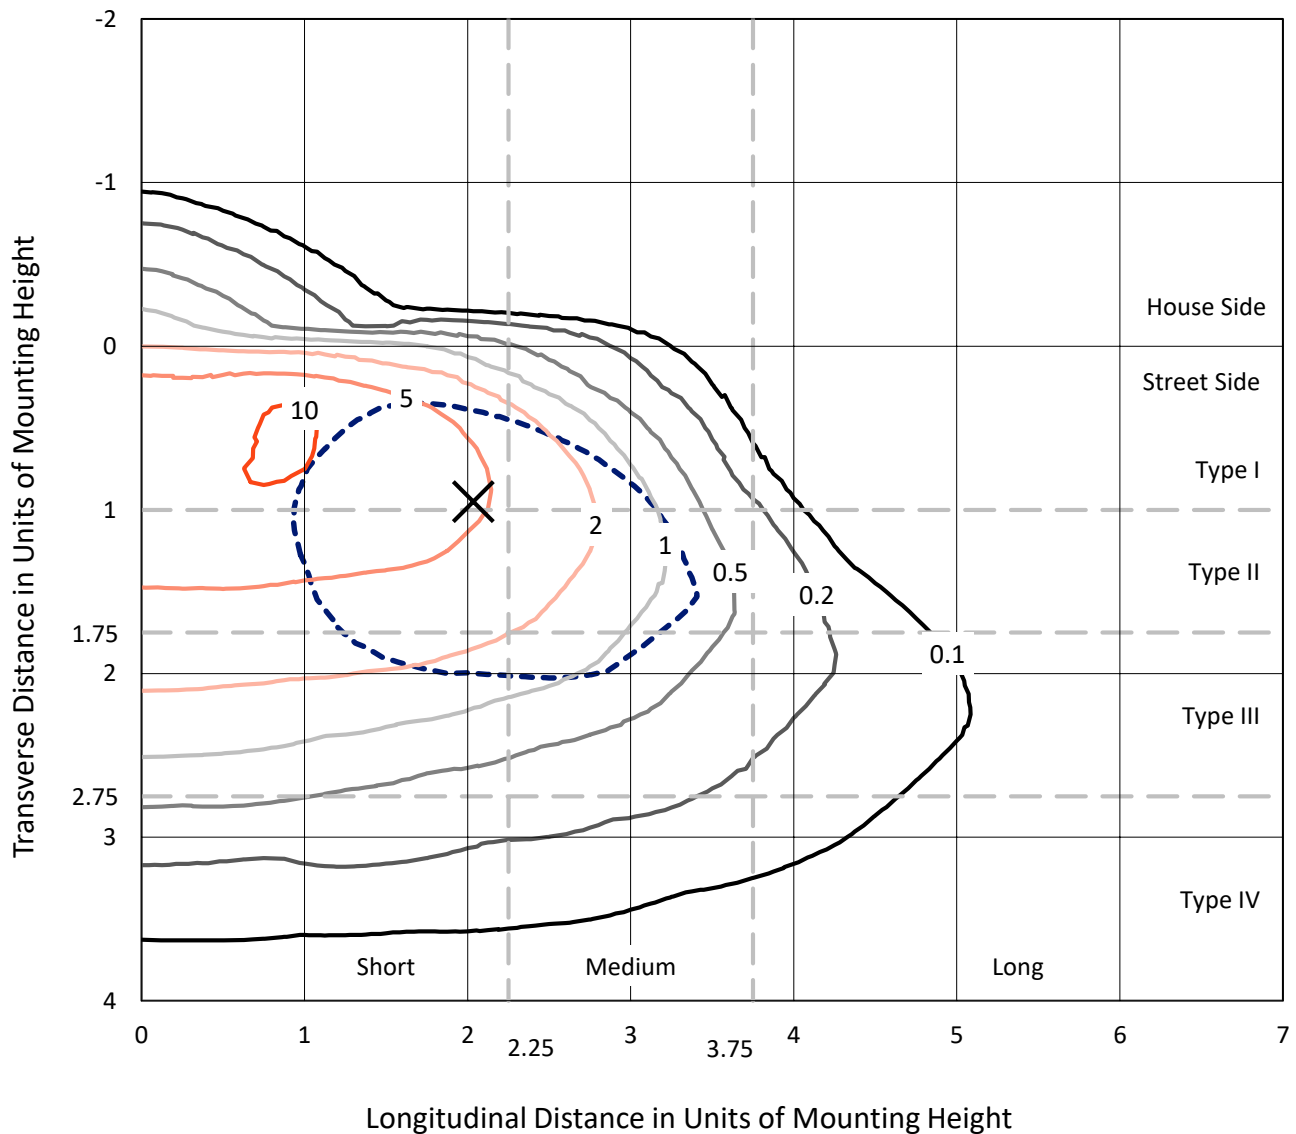


Based on 10 foot mounting height. Maximum calculated value = 10.8 fc
Type III - Short - Non-Cutoff

REPORT NUMBER: P150474

CATALOG NUMBER: VXS-F05-LED-E1-SL3-HSS-7030

Luminous Intensity Polar Plot

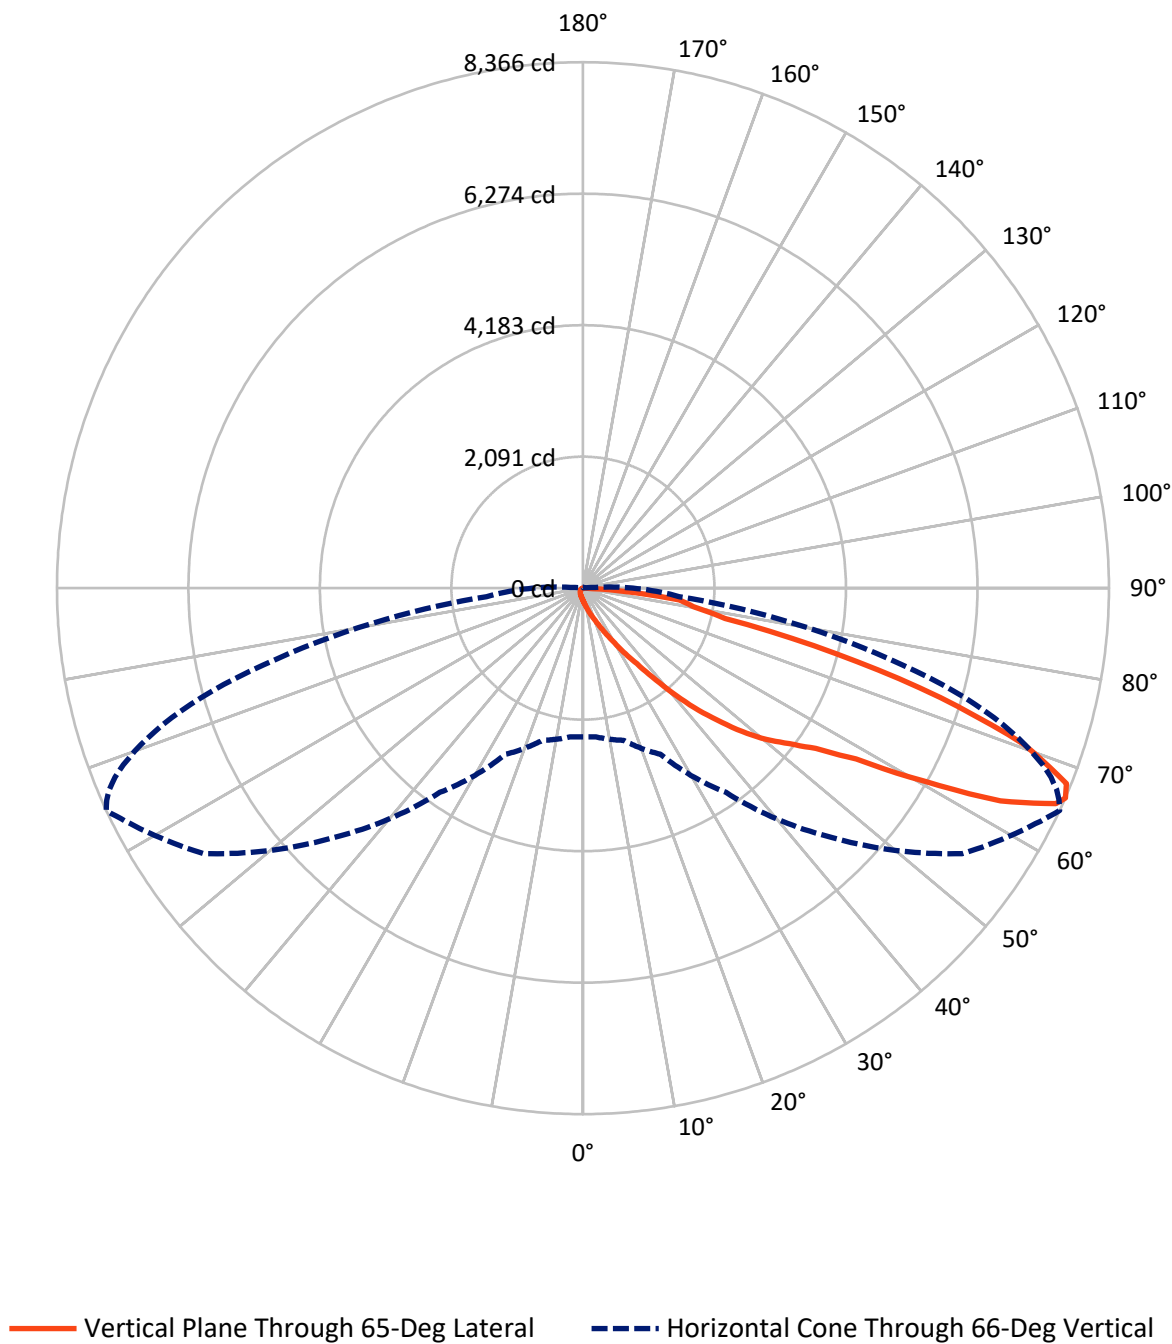

REPORT NUMBER: P150474

CATALOG NUMBER: VXS-F05-LED-E1-SL3-HSS-7030


FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	141.7	0.0	141.7
	% Fixture	2.2	0.0	2.2
Street Side	Lumens	6394.8	0.0	6394.8
	% Fixture	97.8	0.0	97.8
Total	Lumens	6536.5	0.0	6536.5
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	22.1	0.3
10°-20°	93.7	1.4
20°-30°	202.0	3.1
30°-40°	431.3	6.6
40°-50°	953.9	14.6
50°-60°	1616.6	24.7
60°-70°	2157.2	33.0
70°-80°	950.2	14.5
80°-90°	109.5	1.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	6536.5	100.0
0°-180°	6536.5	100.0

Coefficient of Utilization

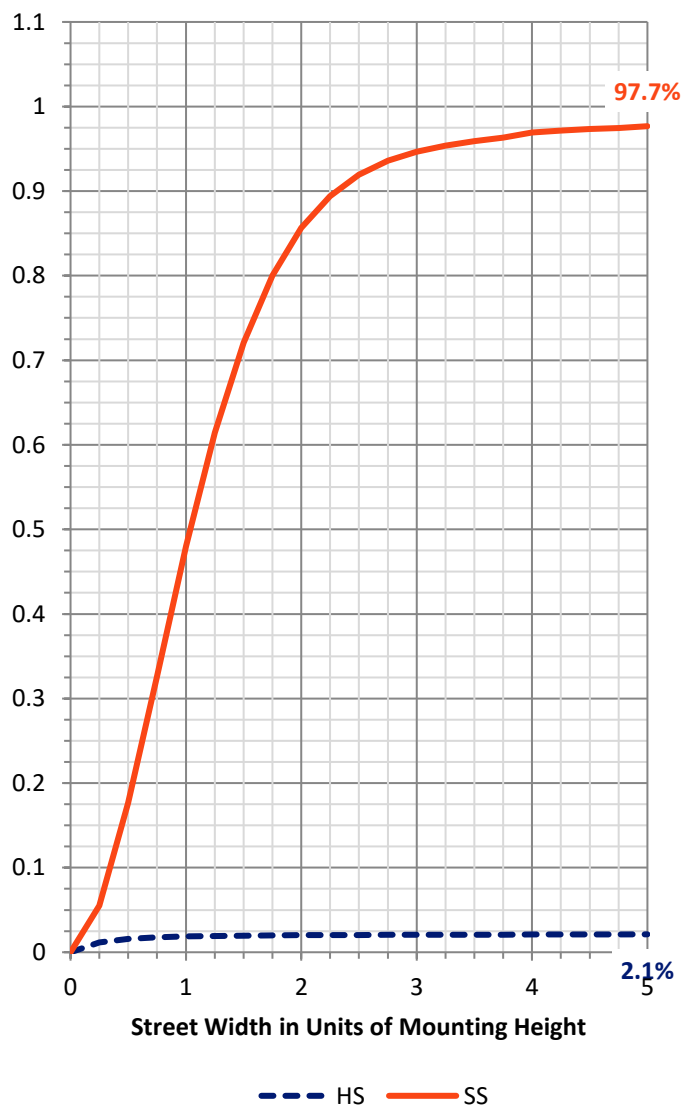

REPORT NUMBER: P150474


CATALOG NUMBER: VXS-F05-LED-E1-SL3-HSS-7030

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	273.0	4.2			
FM	(30°-60°)	2939.7	45.0			
FH	(60°-80°)	3077.0	47.1			G2/5000
FVH	(80°-90°)	105.1	1.6			G2/225
BL	(0°-30°)	44.7	0.7	B0/110		
BM	(30°-60°)	62.2	1.0	B0/220		
BH	(60°-80°)	30.4	0.5	B0/110		G0/110
BVH	(80°-90°)	4.4	0.1			G0/10
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B0-U0-G2

Type III Short

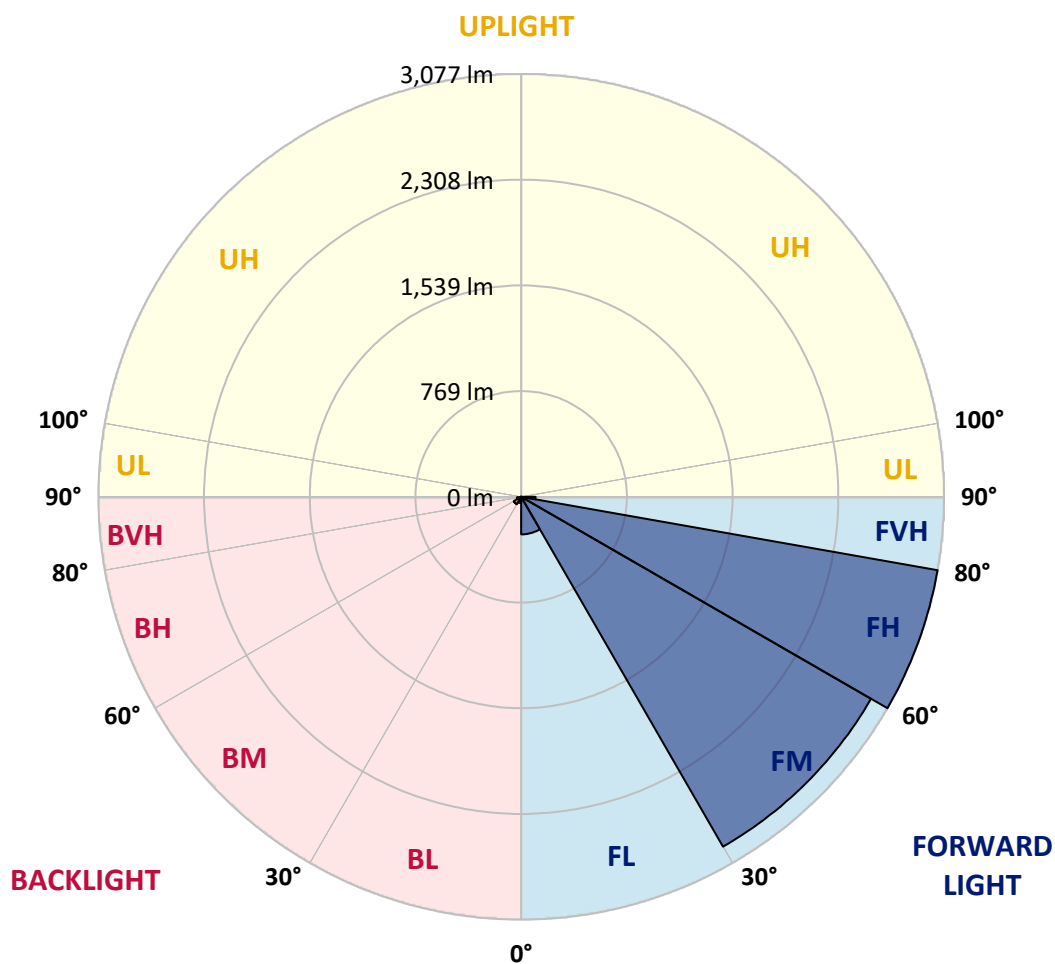

REPORT NUMBER: P150474

CATALOG NUMBER: VXS-F05-LED-E1-SL3-HSS-7030

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	66°	67°	68°
0°	197.3	197.3	197.3	197.3	197.3	197.3	197.3	197.3	197.3	197.3	197.3
2.5°	248.8	247.6	242.5	242.5	235.0	229.9	223.7	217.4	217.4	216.2	214.9
5°	329.2	321.7	320.4	306.6	295.3	279.0	263.9	243.8	241.2	238.8	237.5
7.5°	418.4	417.2	405.9	389.5	366.9	336.8	306.6	274.0	268.9	266.4	261.3
10°	534.1	527.8	512.7	485.1	451.1	410.9	361.9	310.4	304.1	299.1	296.6
12.5°	644.7	633.4	624.6	589.3	546.6	487.6	428.5	354.4	349.3	343.1	333.1
15°	747.7	737.6	722.6	692.4	644.7	570.6	501.5	410.9	398.3	389.5	382.1
17.5°	828.2	821.9	804.2	770.4	718.8	653.5	570.6	468.7	458.7	447.4	433.6
20°	904.8	896.0	868.4	821.9	766.5	716.3	652.2	544.1	530.3	516.5	501.5
22.5°	977.7	968.9	923.6	846.9	787.9	766.5	743.9	629.5	608.2	596.9	581.9
25°	1079.5	1060.6	990.3	868.4	789.2	805.5	844.5	740.2	720.1	703.7	679.9
27.5°	1216.5	1191.3	1080.7	899.8	794.2	848.3	960.1	874.6	853.3	834.4	808.0
30°	1371.0	1354.7	1222.7	975.1	830.7	911.1	1089.5	1045.5	1020.4	997.8	966.3
32.5°	1526.8	1504.2	1373.6	1118.4	928.7	1033.0	1251.6	1244.0	1211.4	1190.1	1156.2
35°	1663.8	1652.5	1555.8	1353.4	1152.3	1246.6	1467.8	1476.6	1447.7	1425.1	1387.4
37.5°	1756.8	1756.8	1737.9	1606.0	1508.0	1578.3	1785.7	1786.9	1758.0	1706.5	1687.7
40°	1804.6	1818.3	1886.2	1911.4	1906.3	1996.8	2202.9	2180.3	2156.4	2130.1	2067.2
42.5°	1902.6	1915.1	2059.7	2233.1	2346.2	2465.6	2607.6	2600.0	2571.1	2523.3	2465.6
45°	2068.5	2084.8	2257.0	2532.1	2764.7	2934.3	3024.8	2989.5	2960.7	2915.4	2885.3
47.5°	2279.6	2311.0	2505.8	2846.3	3126.5	3406.8	3501.0	3408.1	3382.9	3347.8	3298.8
50°	2504.6	2534.7	2742.1	3131.6	3448.3	3782.5	3939.6	3782.5	3746.1	3734.8	3679.5
52.5°	2699.3	2724.5	2924.2	3351.5	3694.6	4086.6	4315.3	4108.0	4081.7	4043.9	4003.7
55°	2814.9	2835.0	3022.3	3457.1	3861.7	4360.6	4678.5	4496.3	4457.4	4442.3	4384.5
57.5°	2853.9	2874.0	3042.4	3470.9	3952.2	4610.7	5119.6	5125.9	5079.4	5025.4	5007.8
60°	2853.9	2876.5	3018.4	3437.0	4040.1	4877.1	5707.8	6231.7	6131.2	6121.1	6057.1
62.5°	2735.8	2757.1	2900.3	3332.6	4158.2	5236.5	6527.0	7451.9	7423.1	7357.7	7252.1
65°	2479.4	2491.9	2632.6	3066.2	4113.1	5566.9	7237.1	8263.7	8217.3	8089.1	7953.4
66°	2363.7	2373.8	2505.8	2914.2	3964.8	5612.2	7362.8	8365.6	8288.9	8180.8	8027.6
67.5°	2196.7	2214.2	2307.3	2631.4	3609.1	5455.1	7283.6	8293.9	8227.4	8096.7	7943.3
70°	1466.5	1454.0	1782.0	2019.5	2749.5	4444.8	6534.6	7446.9	7448.2	7386.6	7325.1
72.5°	696.2	703.7	799.3	1242.8	1799.5	2969.4	5201.3	5943.9	6029.4	5918.9	5842.2
75°	500.1	511.5	569.2	760.3	1073.2	1782.0	3371.6	4157.0	4159.5	3963.5	3788.8
77.5°	145.8	152.0	213.7	468.7	804.2	1202.6	1936.5	2311.0	2257.0	2116.2	1984.2
80°	60.3	60.3	62.8	149.5	323.0	816.8	1354.7	1779.4	1773.2	1719.1	1641.2
82.5°	22.6	23.8	30.2	61.6	76.7	201.0	903.5	1544.5	1540.6	1464.0	1408.7
85°	2.5	2.5	7.6	26.4	28.9	37.7	180.9	681.1	677.3	681.1	596.9
87.5°	0.0	0.0	1.2	2.5	3.7	5.1	7.6	26.4	28.9	27.7	25.2
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P150474

CATALOG NUMBER: VXS-F05-LED-E1-SL3-HSS-7030

CANDELA DISTRIBUTION (continued):

	69°	70°	71°	72°	73°	74°	75°	76°	77°	78°	79°
0°	197.3	197.3	197.3	197.3	197.3	197.3	197.3	197.3	197.3	197.3	197.3
2.5°	214.9	212.3	212.3	211.1	211.1	211.1	209.8	208.6	208.6	207.4	206.1
5°	235.0	232.4	231.2	228.7	227.5	226.2	223.7	222.4	219.9	218.7	217.4
7.5°	258.9	253.9	252.5	248.8	245.1	242.5	240.0	236.3	233.8	228.7	227.5
10°	289.0	282.8	277.7	272.7	268.9	262.6	258.9	253.9	248.8	245.1	241.2
12.5°	328.0	319.2	311.6	306.6	297.8	290.3	282.8	279.0	268.9	263.9	257.6
15°	370.7	360.6	351.8	341.8	335.5	323.0	313.0	301.6	296.6	287.8	277.7
17.5°	426.0	409.6	395.9	385.8	373.3	360.6	349.3	338.0	323.0	313.0	300.3
20°	485.1	471.3	452.4	434.8	419.7	404.7	388.3	373.3	359.4	343.1	328.0
22.5°	560.5	540.3	517.7	500.1	480.0	463.7	441.0	420.9	398.3	377.0	359.4
25°	656.0	629.5	608.2	583.1	559.2	534.1	506.4	481.3	452.4	432.3	402.2
27.5°	774.1	749.0	720.1	687.4	663.5	625.8	589.3	557.9	524.0	492.6	458.7
30°	924.9	888.5	858.3	826.8	779.2	742.7	700.0	657.2	610.8	579.3	527.8
32.5°	1105.9	1066.9	1021.7	976.4	932.4	880.9	828.2	775.3	723.8	666.0	613.3
35°	1327.0	1280.5	1229.0	1180.0	1112.1	1056.9	990.3	917.4	859.6	793.0	726.3
37.5°	1619.8	1543.2	1497.9	1446.4	1354.7	1279.3	1205.2	1132.2	1030.5	960.1	865.8
40°	1986.7	1941.6	1867.4	1784.5	1701.6	1602.3	1501.7	1405.0	1286.8	1188.8	1079.5
42.5°	2417.8	2351.2	2275.9	2156.4	2072.2	1955.3	1841.0	1712.8	1568.3	1442.6	1314.5
45°	2822.5	2743.3	2685.5	2566.1	2478.1	2339.9	2201.7	2065.9	1898.8	1736.7	1588.4
47.5°	3259.8	3194.4	3099.0	3002.2	2913.0	2757.1	2607.6	2442.9	2267.0	2074.7	1882.5
50°	3644.4	3592.7	3527.5	3410.6	3311.3	3180.6	3004.7	2825.0	2602.5	2411.5	2192.8
52.5°	3971.0	3930.8	3839.1	3756.2	3666.9	3543.7	3386.7	3214.5	2974.5	2764.7	2515.9
55°	4356.8	4327.9	4247.5	4196.0	4116.8	3998.7	3851.6	3692.0	3438.2	3209.5	2928.0
57.5°	4988.9	4966.3	4896.0	4874.6	4796.7	4693.6	4512.6	4341.8	4045.2	3761.1	3439.5
60°	6035.8	5990.5	5887.5	5834.6	5670.1	5531.8	5296.8	5061.8	4703.6	4341.8	3954.7
62.5°	7156.7	7029.7	6833.7	6665.3	6431.6	6191.5	5877.4	5517.9	5098.2	4668.5	4223.6
65°	7761.1	7545.0	7297.4	7029.7	6726.8	6373.8	5977.9	5546.8	5095.8	4642.1	4172.1
66°	7830.3	7586.4	7323.8	7026.0	6689.2	6313.5	5911.3	5459.0	4990.2	4547.9	4077.8
67.5°	7743.5	7488.4	7210.7	6880.2	6515.8	6126.2	5703.9	5234.0	4782.8	4334.2	3876.8
70°	7136.6	6882.7	6635.1	6287.0	5898.8	5506.6	5107.0	4581.8	4154.5	3742.3	3335.1
72.5°	5699.0	5526.7	5281.8	4983.9	4605.6	4145.7	3812.6	3342.7	2972.0	2572.3	2257.0
75°	3561.3	3318.9	3016.0	2636.5	2347.5	1974.2	1779.4	1422.5	1211.4	1026.7	848.3
77.5°	1820.9	1638.7	1426.3	1212.6	1007.9	804.2	622.1	439.8	296.6	206.1	153.3
80°	1504.2	1343.3	1167.5	972.6	791.7	614.5	442.4	301.6	192.2	125.7	98.0
82.5°	1242.8	1107.2	950.1	769.1	612.0	482.6	335.5	218.7	135.8	88.0	69.1
85°	529.0	480.0	370.7	294.1	221.1	163.3	114.4	76.7	54.0	43.9	40.2
87.5°	22.6	25.2	23.8	18.9	13.8	13.8	12.5	10.1	10.1	10.1	10.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P150474

CATALOG NUMBER: VXS-F05-LED-E1-SL3-HSS-7030

CANDELA DISTRIBUTION (continued):

	80°	81°	82°	83°	84°	85°	95°	105°	115°	125°	135°
0°	197.3	197.3	197.3	197.3	197.3	197.3	197.3	197.3	197.3	197.3	197.3
2.5°	206.1	204.9	203.6	203.6	202.3	201.0	193.6	187.3	179.7	174.7	169.6
5°	214.9	213.7	211.1	209.8	207.4	206.1	189.7	176.0	164.7	155.9	149.5
7.5°	223.7	222.4	218.7	214.9	213.7	211.1	184.8	167.2	152.0	142.0	135.8
10°	235.0	231.2	227.5	222.4	218.7	214.9	179.7	157.1	140.7	131.9	125.7
12.5°	251.3	245.1	238.8	232.4	227.5	221.1	177.2	148.3	131.9	121.9	115.6
15°	270.2	261.3	253.9	246.3	237.5	231.2	172.1	140.7	124.5	114.4	106.8
17.5°	287.8	277.7	266.4	255.1	246.3	237.5	167.2	133.2	116.9	106.8	99.3
20°	313.0	297.8	284.0	270.2	257.6	246.3	159.6	125.7	110.6	99.3	91.7
22.5°	340.5	323.0	305.4	286.5	270.2	255.1	153.3	119.4	104.4	93.0	84.1
25°	375.8	354.4	330.5	306.6	287.8	267.7	147.0	113.1	98.0	86.7	77.9
27.5°	424.8	394.6	368.2	338.0	309.1	286.5	142.0	108.1	91.7	80.4	71.6
30°	491.4	447.4	405.9	373.3	339.3	306.6	137.0	101.8	86.7	74.1	64.0
32.5°	565.5	514.0	466.2	417.2	374.5	336.8	131.9	96.8	80.4	67.9	59.1
35°	657.2	591.9	527.8	471.3	419.7	369.4	126.9	91.7	75.4	61.6	52.7
37.5°	789.2	707.5	623.3	550.5	483.8	417.2	123.1	86.7	69.1	55.3	46.5
40°	970.2	864.6	761.6	662.3	575.5	492.6	118.1	81.7	64.0	50.3	41.5
42.5°	1166.2	1038.0	902.3	790.5	671.1	566.7	113.1	76.7	59.1	45.3	36.5
45°	1409.9	1250.4	1085.7	933.7	787.9	653.5	108.1	71.6	52.7	40.2	31.4
47.5°	1676.4	1472.8	1286.8	1095.9	922.4	761.6	101.8	67.9	47.8	35.2	27.7
50°	1950.4	1735.4	1500.4	1283.0	1077.0	869.6	95.5	61.6	42.7	31.4	22.6
52.5°	2245.6	1991.8	1751.8	1481.6	1241.6	1011.6	89.2	56.6	39.0	27.7	18.9
55°	2621.3	2337.4	2055.9	1753.1	1464.0	1176.3	82.9	50.3	33.9	23.8	15.1
57.5°	3093.9	2757.1	2411.5	2069.7	1719.1	1392.3	77.9	43.9	28.9	20.1	12.5
60°	3540.0	3146.6	2728.2	2334.8	1939.1	1558.2	70.4	39.0	25.2	16.4	12.5
62.5°	3771.2	3322.6	2871.5	2437.9	2015.6	1617.3	62.8	32.6	21.3	13.8	11.3
65°	3714.7	3257.2	2819.9	2382.6	1969.2	1579.6	55.3	28.9	18.9	12.5	11.3
66°	3633.0	3180.6	2740.7	2324.8	1930.3	1539.4	51.5	27.7	17.6	12.5	10.1
67.5°	3454.5	3017.2	2597.5	2210.5	1823.4	1462.8	46.5	25.2	16.4	11.3	10.1
70°	2950.7	2553.6	2218.0	1873.7	1558.2	1232.7	37.7	21.3	13.8	10.1	10.1
72.5°	1952.8	1682.7	1459.0	1255.4	1049.3	814.3	31.4	17.6	11.3	10.1	8.8
75°	736.4	666.0	571.8	514.0	448.6	393.4	25.2	11.3	8.8	8.8	8.8
77.5°	130.7	120.6	106.8	98.0	90.5	82.9	20.1	7.6	7.6	8.8	8.8
80°	88.0	81.7	74.1	67.9	62.8	56.6	13.8	6.3	7.6	7.6	8.8
82.5°	62.8	59.1	55.3	50.3	46.5	41.5	8.8	6.3	7.6	7.6	7.6
85°	37.7	35.2	32.6	30.2	26.4	25.2	6.3	6.3	6.3	7.6	7.6
87.5°	10.1	8.8	10.1	10.1	7.6	8.8	5.1	5.1	5.1	6.3	6.3
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P150474

CATALOG NUMBER: VXS-F05-LED-E1-SL3-HSS-7030

CANDELA DISTRIBUTION (continued):

	145°	155°	165°	175°	180°
0°	197.3	197.3	197.3	197.3	197.3
2.5°	167.2	167.2	164.7	168.4	168.4
5°	144.6	144.6	143.2	144.6	144.6
7.5°	131.9	130.7	130.7	130.7	131.9
10°	120.6	119.4	119.4	119.4	119.4
12.5°	110.6	109.3	108.1	109.3	109.3
15°	101.8	99.3	99.3	99.3	99.3
17.5°	94.3	91.7	90.5	90.5	90.5
20°	86.7	82.9	82.9	82.9	82.9
22.5°	79.2	75.4	75.4	75.4	75.4
25°	71.6	67.9	67.9	67.9	67.9
27.5°	65.4	61.6	61.6	61.6	61.6
30°	57.8	55.3	55.3	56.6	55.3
32.5°	52.7	49.0	49.0	50.3	50.3
35°	46.5	43.9	43.9	43.9	43.9
37.5°	40.2	37.7	37.7	37.7	37.7
40°	35.2	32.6	31.4	32.6	32.6
42.5°	30.2	27.7	26.4	26.4	26.4
45°	26.4	22.6	21.3	22.6	22.6
47.5°	21.3	18.9	18.9	20.1	20.1
50°	16.4	16.4	17.6	20.1	20.1
52.5°	15.1	15.1	17.6	20.1	20.1
55°	13.8	15.1	17.6	18.9	20.1
57.5°	12.5	15.1	17.6	18.9	18.9
60°	12.5	13.8	16.4	18.9	18.9
62.5°	11.3	12.5	15.1	17.6	17.6
65°	11.3	12.5	15.1	17.6	17.6
66°	11.3	12.5	15.1	17.6	17.6
67.5°	11.3	12.5	15.1	17.6	17.6
70°	11.3	12.5	15.1	16.4	16.4
72.5°	10.1	11.3	13.8	16.4	16.4
75°	10.1	11.3	13.8	16.4	16.4
77.5°	10.1	11.3	13.8	16.4	16.4
80°	10.1	11.3	13.8	15.1	16.4
82.5°	8.8	11.3	12.5	15.1	15.1
85°	8.8	10.1	12.5	13.8	15.1
87.5°	7.6	8.8	10.1	12.5	12.5
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)