

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: INVUE

Report Number: P156503

Luminaire Tested: **VXS-F06-LED-E1-T4-8030**

Issue Date: 03/03/2020

Test Information

Test Method: LM-79-08
Report Number: P156503
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (P33673)
Test Lab: INNOVATION CENTER-P3
Issue Date: 03/03/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: INVUE
Catalog Number: VXS-F06-LED-E1-T4-8030
Description: VISION SITE SMALL LED LUMINAIRE
(6) LIGHTBARS WITH AccuLED OPTICS - TYPE 4
Light Source: (42) 3000K CCT, 80 CRI LEDs
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 12633.4 lumens
Efficiency: N/A
Efficacy: 80.7 lumens/watt
Luminous Opening: Rectangular (W 1' x L: 1' x H: 0')
IES Classification: Type IV - Short - Semi-Cutoff
BUG Rating: B2 - U0 - G3

Input Watts (W): 156.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT




REPORT NUMBER: P156503

CATALOG NUMBER: VXS-F06-LED-E1-T4-8030

Iso-Footcandle Lines of Horizontal Illumination

× Max cd

--- 1/2 Max cd

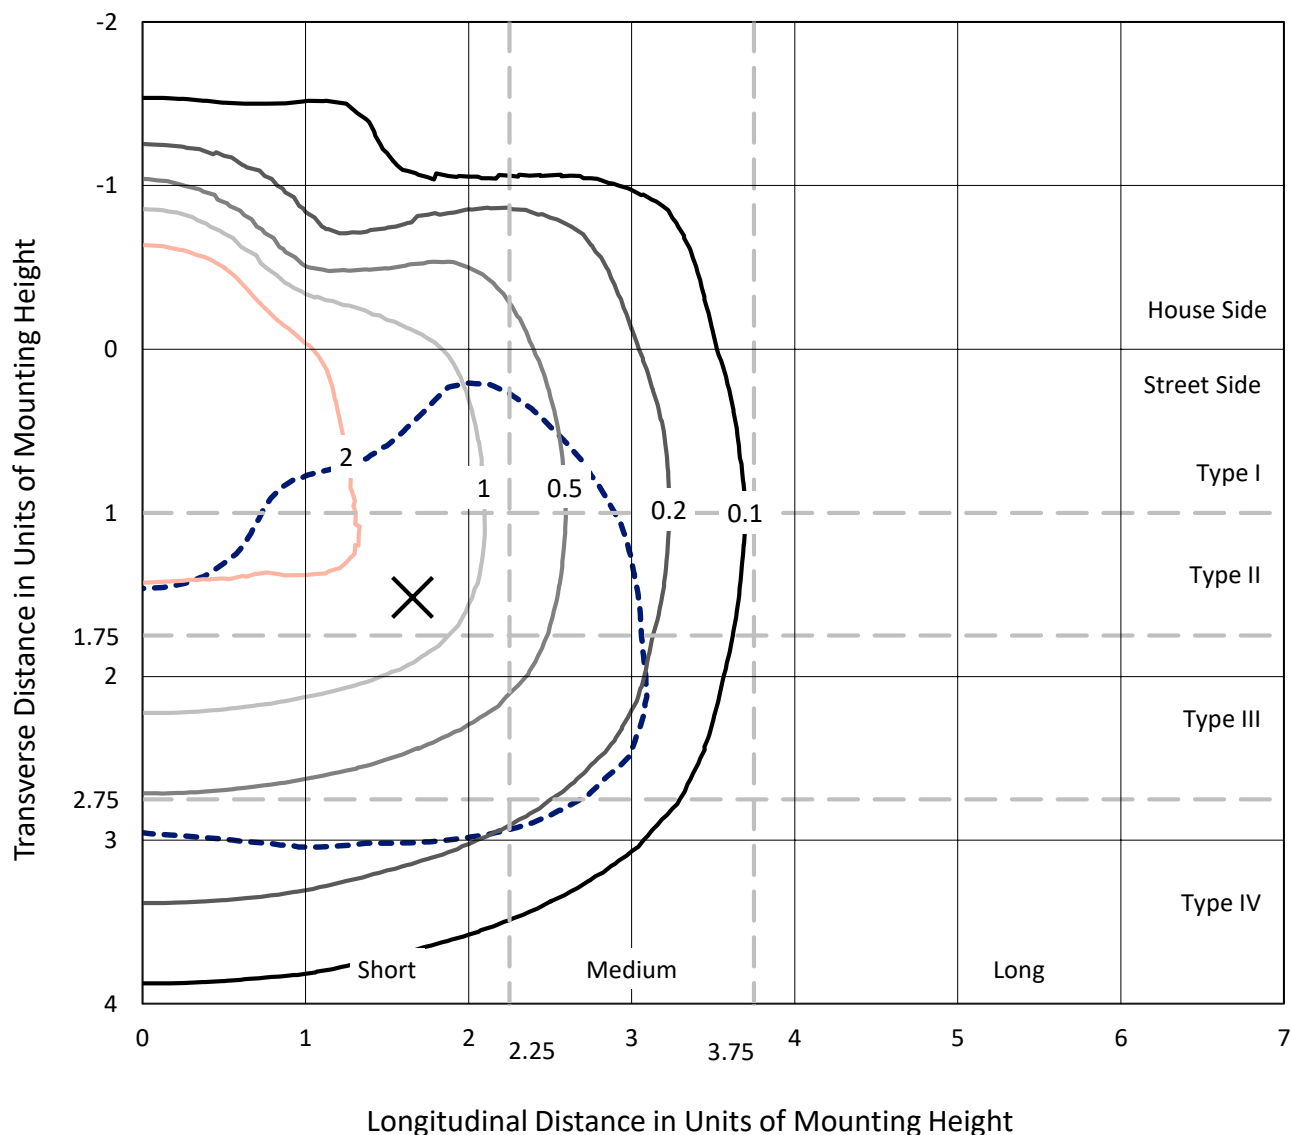


Based on 20 foot mounting height. Maximum calculated value = 4.4 fc
 Type IV - Short - Semi-Cutoff

REPORT NUMBER: P156503

CATALOG NUMBER: VXS-F06-LED-E1-T4-8030

Luminous Intensity Polar Plot

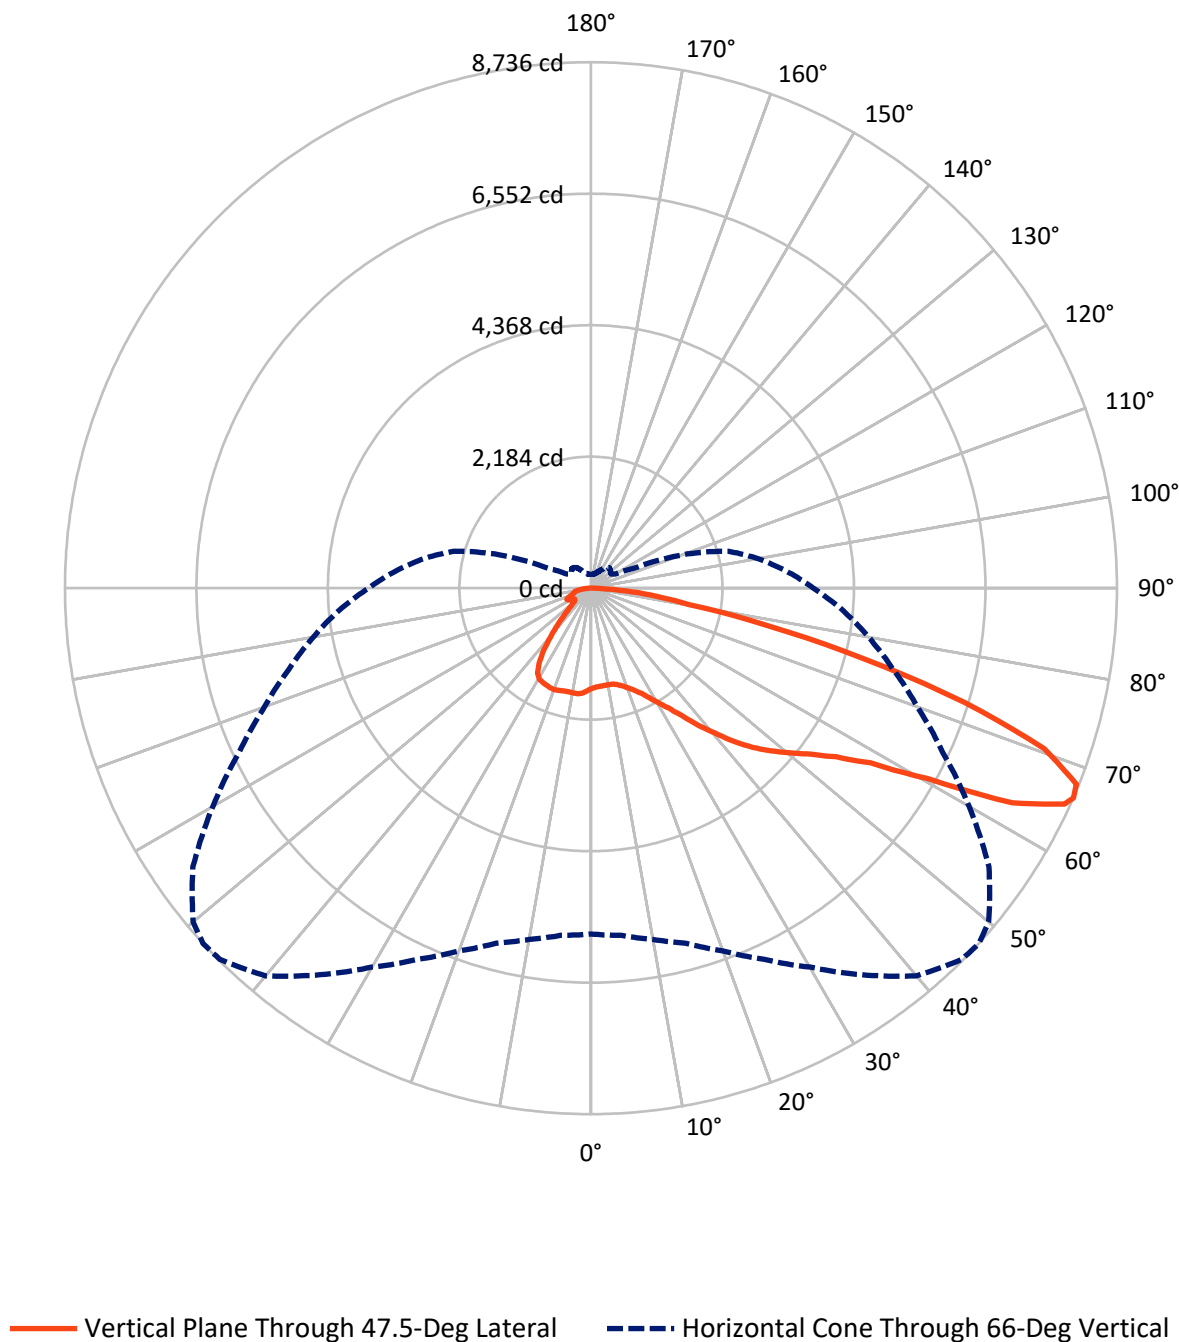

REPORT NUMBER: P156503

CATALOG NUMBER: VXS-F06-LED-E1-T4-8030

FLUX DISTRIBUTION:

		Downward	Upward	Total
House Side	Lumens	2695.6	0.0	2695.6
	% Fixture	21.3	0.0	21.3
Street Side	Lumens	9937.7	0.0	9937.7
	% Fixture	78.7	0.0	78.7
Total	Lumens	12633.4	0.0	12633.4
	% Fixture	100.0	0.0	100.0

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	161.7	1.3
10°-20°	490.9	3.9
20°-30°	845.6	6.7
30°-40°	1279.4	10.1
40°-50°	1658.2	13.1
50°-60°	2286.2	18.1
60°-70°	3552.0	28.1
70°-80°	2065.5	16.3
80°-90°	293.7	2.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-90°	12633.4	100.0
0°-180°	12633.4	100.0

Coefficient of Utilization



REPORT NUMBER: P156503


CATALOG NUMBER: VXS-F06-LED-E1-T4-8030

LUMINAIRE CLASSIFICATION SYSTEM LUMEN TABLE AND BUG RATING:

Zone		Lumens	% Fixture	Zone Rating/Lumen Limit		
				B	U	G
FL	(0°-30°)	776.7	6.1			
FM	(30°-60°)	4055.3	32.1			
FH	(60°-80°)	4880.3	38.6			G2/5000
FVH	(80°-90°)	225.4	1.8			G3/500
BL	(0°-30°)	721.6	5.7	B2/1000		
BM	(30°-60°)	1168.5	9.2	B2/2500		
BH	(60°-80°)	737.3	5.8	B2/1000		G2/1000
BVH	(80°-90°)	68.3	0.5			G1/100
UL	(90°-100°)	0.0	0.0		U0/0	
UH	(100°-180°)	0.0	0.0		U0/0	

BUG Rating: B2-U0-G3

Type IV Short

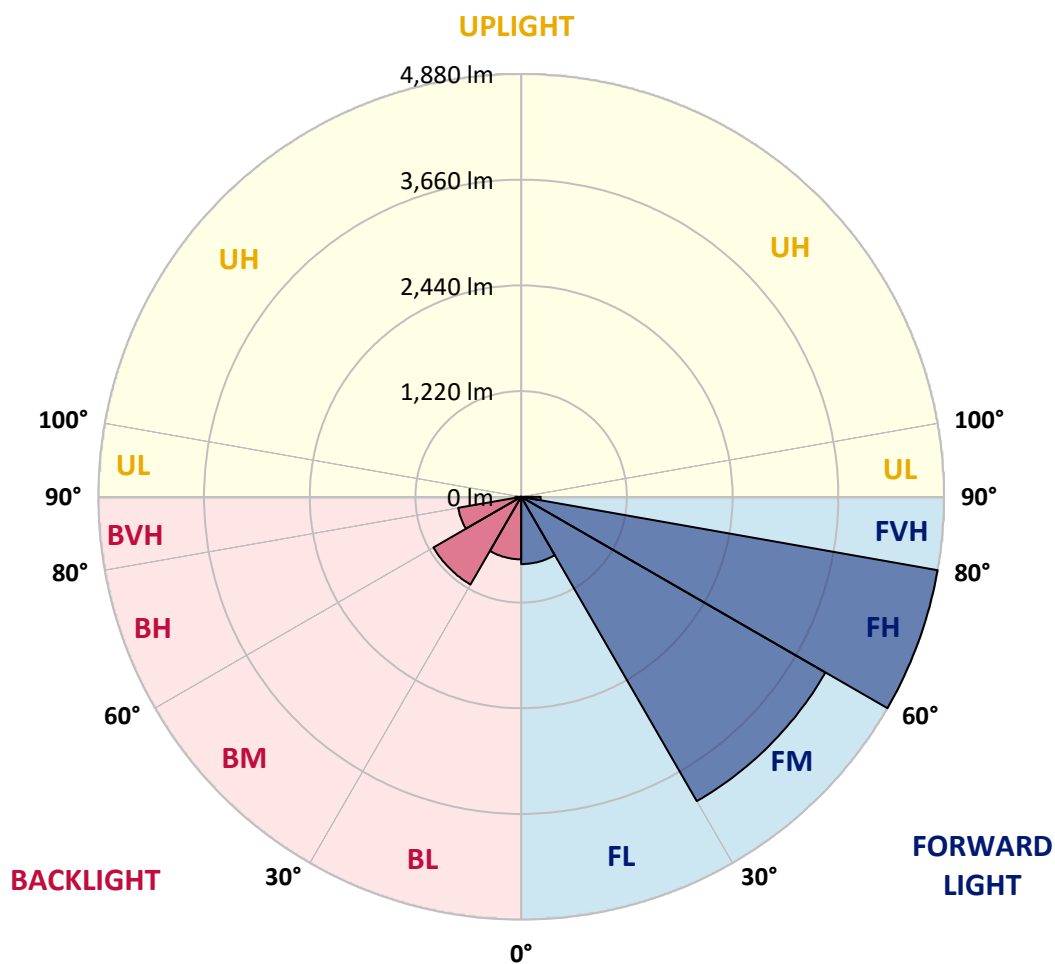

REPORT NUMBER: P156503

CATALOG NUMBER: VXS-F06-LED-E1-T4-8030

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	47.5°
0°	1665.2	1665.2	1665.2	1665.2	1665.2	1665.2	1665.2	1665.2	1665.2	1665.2	1665.2
2.5°	1634.5	1640.1	1636.0	1637.3	1637.3	1638.8	1638.8	1640.1	1638.8	1642.9	1645.7
5°	1605.3	1608.1	1606.6	1609.4	1612.2	1617.8	1616.5	1623.4	1624.8	1629.0	1636.0
7.5°	1594.1	1591.3	1592.7	1596.9	1599.7	1602.5	1605.3	1610.9	1615.0	1624.8	1630.4
10°	1605.3	1603.8	1605.3	1608.1	1608.1	1609.4	1606.6	1612.2	1615.0	1623.4	1629.0
12.5°	1651.3	1651.3	1648.5	1648.5	1645.7	1642.9	1636.0	1631.7	1630.4	1631.7	1634.5
15°	1725.1	1722.3	1716.8	1712.5	1707.0	1697.2	1687.5	1679.2	1673.6	1665.2	1662.4
17.5°	1797.6	1793.4	1787.8	1782.3	1775.2	1765.5	1750.2	1740.4	1725.1	1715.3	1709.7
20°	1881.1	1872.8	1865.9	1858.9	1845.0	1842.2	1826.8	1810.2	1792.0	1769.7	1766.9
22.5°	1989.8	1976.0	1967.6	1963.4	1949.4	1945.3	1920.2	1896.5	1874.2	1845.0	1838.0
25°	2100.0	2086.0	2081.9	2076.3	2066.5	2060.9	2037.3	2010.8	1981.6	1941.1	1932.7
27.5°	2207.3	2208.6	2197.5	2201.7	2198.9	2189.1	2165.5	2139.0	2116.7	2069.3	2059.6
30°	2341.0	2332.6	2327.0	2335.4	2325.7	2327.0	2306.2	2292.2	2256.1	2228.2	2208.6
32.5°	2480.4	2479.0	2487.4	2493.0	2491.5	2488.7	2472.0	2458.1	2426.0	2385.6	2377.3
35°	2671.3	2679.7	2686.6	2711.7	2711.7	2729.8	2713.1	2696.4	2658.8	2609.9	2593.3
37.5°	2800.8	2803.6	2831.5	2865.0	2906.7	2945.8	2957.0	2961.1	2945.8	2909.5	2884.5
40°	2919.3	2924.9	2969.5	3021.0	3082.4	3159.0	3205.0	3225.9	3230.1	3213.4	3159.0
42.5°	3037.7	3046.1	3092.1	3167.4	3252.3	3349.9	3430.8	3482.3	3511.5	3511.5	3479.5
45°	3175.8	3186.8	3237.0	3319.3	3418.1	3540.8	3652.3	3751.2	3798.7	3801.3	3770.8
47.5°	3338.8	3348.5	3407.0	3490.7	3592.3	3716.4	3857.1	3969.9	4057.8	4063.3	4038.2
50°	3549.1	3563.1	3611.9	3687.2	3791.6	3917.1	4057.8	4215.2	4307.3	4329.5	4303.0
52.5°	3827.9	3830.7	3871.1	3940.7	4042.5	4162.3	4311.4	4482.8	4604.0	4622.2	4579.0
55°	4212.4	4208.3	4234.7	4310.1	4386.6	4480.0	4634.7	4826.9	4962.2	4990.1	4945.4
57.5°	4735.0	4730.9	4753.2	4771.3	4914.8	5005.4	5157.2	5341.1	5472.1	5553.0	5476.4
60°	5544.7	5540.4	5576.7	5682.6	5789.8	5922.3	6069.9	6290.2	6474.1	6497.7	6422.5
62.5°	6131.3	6152.1	6231.6	6355.6	6573.0	6832.2	7102.5	7392.3	7769.9	7889.8	7853.6
65°	5926.4	5968.2	6078.3	6266.4	6556.3	6914.4	7338.0	7863.3	8369.2	8652.0	8643.7
66°	5742.5	5788.5	5923.6	6104.8	6411.4	6802.9	7265.6	7838.2	8404.0	8716.2	8735.6
67.5°	5408.1	5459.6	5592.0	5806.6	6104.8	6521.5	7019.0	7641.8	8281.3	8645.1	8696.7
70°	4757.3	4815.9	4912.0	5088.9	5383.0	5755.0	6279.0	6836.4	7506.6	7923.3	7986.0
72.5°	3977.0	4028.5	4135.9	4280.7	4521.9	4756.0	5166.9	5578.0	6057.4	6532.6	6486.6
75°	2855.2	2877.5	2941.7	3099.1	3228.7	3439.1	3769.3	4106.5	4434.0	4651.4	4682.1
77.5°	1484.0	1542.6	1633.2	1807.4	1948.1	2137.6	2352.2	2605.8	2845.5	3044.8	2990.4
80°	971.3	996.4	1077.2	1166.3	1269.4	1390.7	1534.2	1629.0	1659.6	1647.0	1659.6
82.5°	560.2	606.1	713.5	781.8	858.3	900.2	1014.4	1123.1	1184.5	1107.8	1079.9
85°	71.1	92.0	289.8	365.1	418.0	480.7	515.5	581.0	542.1	485.0	590.9
87.5°	15.3	13.9	19.5	41.8	43.2	36.3	68.3	72.4	44.6	22.3	27.9
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P156503

CATALOG NUMBER: VXS-F06-LED-E1-T4-8030

CANDELA DISTRIBUTION (continued):

	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°
0°	1665.2	1665.2	1665.2	1665.2	1665.2	1665.2	1665.2	1665.2	1665.2	1665.2	1665.2
2.5°	1648.5	1649.8	1652.6	1656.8	1659.6	1662.4	1665.2	1669.4	1672.1	1674.9	1680.5
5°	1641.6	1647.0	1652.6	1658.2	1665.2	1676.4	1683.3	1688.9	1694.5	1705.6	1709.7
7.5°	1637.3	1647.0	1655.4	1665.2	1676.4	1686.1	1698.7	1705.6	1714.0	1720.9	1729.3
10°	1634.5	1648.5	1656.8	1670.8	1683.3	1693.1	1707.0	1715.3	1725.1	1733.5	1737.6
12.5°	1640.1	1647.0	1655.4	1669.4	1684.7	1698.7	1714.0	1720.9	1729.3	1736.3	1737.6
15°	1663.8	1663.8	1665.2	1676.4	1691.7	1702.8	1715.3	1722.3	1726.5	1730.7	1730.7
17.5°	1707.0	1697.2	1690.3	1691.7	1701.5	1708.4	1715.3	1715.3	1712.5	1711.2	1708.4
20°	1757.2	1744.7	1730.7	1720.9	1718.1	1712.5	1708.4	1694.5	1683.3	1673.6	1666.6
22.5°	1829.6	1810.2	1790.6	1772.5	1755.8	1734.9	1711.2	1683.3	1656.8	1638.8	1627.6
25°	1918.9	1903.5	1879.8	1851.9	1831.0	1792.0	1761.3	1720.9	1687.5	1663.8	1644.2
27.5°	2045.6	2027.5	2005.2	1980.1	1949.4	1906.2	1868.6	1821.2	1780.8	1746.0	1720.9
30°	2203.1	2179.4	2162.7	2132.0	2111.1	2062.4	2024.7	1966.2	1888.2	1832.4	1797.6
32.5°	2364.8	2338.2	2324.4	2300.6	2276.9	2247.7	2190.6	2100.0	1999.6	1909.0	1849.1
35°	2580.7	2552.8	2527.8	2506.8	2472.0	2417.7	2367.5	2258.9	2120.8	1994.1	1893.7
37.5°	2852.4	2806.4	2743.7	2690.8	2629.4	2551.4	2474.8	2363.3	2205.9	2041.5	1907.7
40°	3142.3	3061.5	2972.2	2873.4	2767.5	2654.6	2566.7	2453.9	2276.9	2081.9	1897.9
42.5°	3444.7	3316.5	3192.4	3053.1	2905.4	2771.6	2657.3	2533.4	2329.8	2093.0	1858.9
45°	3744.2	3600.7	3412.6	3230.1	3043.3	2877.5	2749.3	2609.9	2378.7	2097.2	1807.4
47.5°	3992.3	3844.6	3629.9	3401.5	3179.9	2991.8	2841.2	2690.8	2444.1	2126.4	1794.8
50°	4254.3	4074.5	3836.3	3565.9	3315.0	3104.7	2944.5	2788.3	2536.2	2201.7	1835.2
52.5°	4539.9	4333.7	4055.0	3752.6	3478.1	3242.6	3068.4	2908.2	2653.2	2307.6	1911.8
55°	4888.3	4636.1	4333.7	3992.3	3698.2	3437.7	3245.4	3055.9	2792.5	2433.0	2008.0
57.5°	5420.6	5111.3	4771.3	4382.5	4056.4	3748.4	3518.5	3299.7	3008.5	2619.7	2139.0
60°	6383.5	6053.3	5611.5	5140.5	4757.3	4397.8	4060.6	3788.8	3430.8	2987.6	2428.8
62.5°	7763.0	7324.0	6734.6	6075.5	5573.9	5055.5	4675.1	4271.0	3826.4	3348.5	2770.3
65°	8529.4	7997.1	7208.4	6443.4	5798.2	5235.2	4751.7	4283.5	3790.3	3333.2	2849.6
66°	8624.1	8069.6	7250.3	6444.8	5767.6	5189.3	4680.6	4195.8	3691.3	3255.1	2816.2
67.5°	8585.2	8018.0	7173.6	6323.5	5635.2	5013.7	4488.4	3985.3	3482.3	3075.4	2704.8
70°	7945.6	7407.7	6578.5	5755.0	5101.5	4488.4	3986.7	3492.0	3030.8	2682.4	2409.3
72.5°	6598.1	6138.2	5417.8	4771.3	4258.4	3752.6	3327.6	2855.2	2465.1	2207.3	2045.6
75°	4762.9	4484.1	3827.9	3457.2	3007.2	2671.3	2258.9	1978.8	1698.7	1573.3	1545.4
77.5°	3008.5	2633.7	2217.0	1825.5	1500.7	1244.4	968.5	822.2	685.6	671.6	811.0
80°	1523.1	1371.2	1056.3	841.7	707.9	572.7	452.8	342.8	239.7	288.5	345.6
82.5°	997.7	831.9	652.1	536.5	466.8	387.4	301.0	209.0	153.3	172.7	236.9
85°	539.3	459.9	370.7	292.6	236.9	211.8	142.2	100.3	99.0	105.9	135.1
87.5°	39.1	39.1	30.7	27.9	33.5	27.9	25.1	25.1	23.7	25.1	33.5
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P156503

CATALOG NUMBER: VXS-F06-LED-E1-T4-8030

CANDELA DISTRIBUTION (continued):

	105°	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°
0°	1665.2	1665.2	1665.2	1665.2	1665.2	1665.2	1665.2	1665.2	1665.2	1665.2	1665.2
2.5°	1683.3	1687.5	1688.9	1695.9	1700.0	1702.8	1705.6	1705.6	1707.0	1711.2	1712.5
5°	1715.3	1722.3	1730.7	1736.3	1739.1	1747.5	1750.2	1750.2	1753.0	1758.5	1762.7
7.5°	1734.9	1744.7	1753.0	1755.8	1761.3	1764.1	1768.3	1771.1	1771.1	1776.7	1779.5
10°	1741.9	1747.5	1755.8	1755.8	1761.3	1761.3	1765.5	1766.9	1766.9	1772.5	1776.7
12.5°	1741.9	1744.7	1751.6	1751.6	1755.8	1757.2	1762.7	1766.9	1768.3	1775.2	1780.8
15°	1733.5	1736.3	1741.9	1743.2	1753.0	1758.5	1771.1	1779.5	1779.5	1786.4	1789.2
17.5°	1709.7	1716.8	1727.9	1739.1	1757.2	1769.7	1785.1	1792.0	1786.4	1782.3	1778.0
20°	1670.8	1683.3	1709.7	1737.6	1769.7	1786.4	1794.8	1787.8	1768.3	1748.8	1736.3
22.5°	1631.7	1656.8	1701.5	1743.2	1779.5	1790.6	1786.4	1761.3	1729.3	1705.6	1688.9
25°	1649.8	1679.2	1722.3	1760.0	1783.6	1780.8	1764.1	1729.3	1694.5	1663.8	1636.0
27.5°	1725.1	1757.2	1780.8	1793.4	1790.6	1771.1	1744.7	1705.6	1663.8	1623.4	1584.4
30°	1796.2	1813.0	1818.4	1808.7	1786.4	1754.4	1720.9	1676.4	1620.6	1570.5	1525.8
32.5°	1828.2	1811.5	1785.1	1758.5	1722.3	1694.5	1648.5	1599.7	1530.1	1470.2	1425.5
35°	1828.2	1761.3	1694.5	1638.8	1584.4	1549.5	1496.6	1431.1	1367.0	1316.8	1282.0
37.5°	1787.8	1659.6	1549.5	1459.0	1390.7	1353.1	1273.7	1215.1	1160.7	1144.0	1121.8
40°	1714.0	1524.5	1365.6	1247.2	1160.7	1105.0	1025.6	985.2	964.2	956.0	951.7
42.5°	1615.0	1374.0	1162.2	1015.9	922.5	859.8	806.8	781.8	780.3	779.0	779.0
45°	1509.1	1212.3	964.2	790.1	707.9	652.1	627.0	617.3	625.7	624.2	625.7
47.5°	1443.6	1089.7	783.1	597.8	535.1	498.9	486.3	490.5	497.5	494.7	494.7
50°	1435.2	1026.9	661.9	465.4	418.0	399.9	397.1	397.1	401.3	398.5	397.1
52.5°	1465.9	1017.2	599.2	399.9	362.3	346.9	344.1	342.8	341.5	333.1	326.1
55°	1518.9	1039.5	581.0	383.2	344.1	327.5	323.3	320.5	314.9	303.7	291.2
57.5°	1624.8	1109.2	597.8	391.6	349.7	335.9	331.6	331.6	320.5	302.4	284.2
60°	1879.8	1286.2	666.1	423.6	376.3	362.3	365.1	363.7	346.9	320.5	292.6
62.5°	2208.6	1517.5	755.2	468.2	409.6	406.9	420.8	418.0	390.2	349.7	309.3
65°	2360.5	1626.2	780.3	477.9	416.7	429.2	457.1	454.3	419.5	363.7	312.1
66°	2363.3	1626.2	769.2	469.6	406.9	422.2	450.1	448.7	413.9	358.1	306.5
67.5°	2306.2	1581.6	737.1	452.8	387.4	398.5	423.6	422.2	390.2	344.1	295.4
70°	2091.6	1415.8	654.9	423.6	360.9	355.3	363.7	358.1	337.2	305.2	271.7
72.5°	1792.0	1188.6	571.3	401.3	342.8	320.5	314.9	310.8	294.0	276.0	255.0
75°	1411.6	940.6	501.7	384.6	326.1	296.8	287.0	281.5	270.4	257.8	241.0
77.5°	870.9	673.1	437.5	362.3	313.6	284.2	277.3	268.9	252.2	236.9	224.4
80°	388.8	416.7	359.5	316.3	280.1	253.6	242.5	229.9	213.2	203.4	196.5
82.5°	259.2	268.9	260.6	236.9	211.8	190.9	174.2	174.2	171.4	163.0	160.2
85°	165.8	167.3	161.7	146.3	136.6	124.0	117.1	118.4	124.0	122.6	121.2
87.5°	37.6	37.6	44.6	41.8	48.8	51.6	55.8	59.9	68.3	68.3	72.4
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

REPORT NUMBER: P156503

CATALOG NUMBER: VXS-F06-LED-E1-T4-8030

CANDELA DISTRIBUTION (continued):

	160°	165°	170°	175°	180°
0°	1665.2	1665.2	1665.2	1665.2	1665.2
2.5°	1714.0	1716.8	1719.6	1715.3	1716.8
5°	1762.7	1761.3	1768.3	1764.1	1766.9
7.5°	1778.0	1779.5	1785.1	1785.1	1786.4
10°	1779.5	1782.3	1789.2	1793.4	1796.2
12.5°	1786.4	1792.0	1803.1	1805.9	1805.9
15°	1792.0	1794.8	1801.8	1804.6	1807.4
17.5°	1772.5	1766.9	1769.7	1771.1	1769.7
20°	1723.7	1718.1	1716.8	1711.2	1714.0
22.5°	1670.8	1655.4	1645.7	1634.5	1634.5
25°	1606.6	1583.0	1563.5	1543.9	1548.2
27.5°	1546.7	1516.1	1496.6	1484.0	1481.2
30°	1488.2	1456.2	1438.0	1422.7	1422.7
32.5°	1390.7	1368.4	1344.7	1334.9	1333.6
35°	1255.5	1241.6	1222.1	1217.9	1210.9
37.5°	1103.6	1099.5	1082.7	1081.3	1074.4
40°	944.8	947.6	942.0	939.2	935.0
42.5°	785.9	799.9	797.1	795.6	792.8
45°	634.0	643.8	645.2	649.3	656.4
47.5°	498.9	501.7	504.5	503.0	504.5
50°	390.2	383.2	381.8	377.6	381.8
52.5°	314.9	303.7	298.2	292.6	289.8
55°	277.3	266.1	260.6	257.8	255.0
57.5°	267.6	256.4	248.1	242.5	241.0
60°	270.4	253.6	242.5	235.5	234.1
62.5°	277.3	255.0	239.7	232.7	231.3
65°	276.0	252.2	238.2	229.9	228.5
66°	271.7	249.4	235.5	228.5	227.2
67.5°	264.8	245.3	232.7	227.2	224.4
70°	252.2	239.7	229.9	223.0	220.2
72.5°	241.0	231.3	223.0	216.0	214.6
75°	228.5	220.2	211.8	206.2	204.9
77.5°	213.2	204.9	199.3	195.1	193.7
80°	188.1	182.6	177.0	171.4	171.4
82.5°	156.1	151.9	146.3	142.2	140.7
85°	119.8	119.8	115.6	111.5	110.1
87.5°	71.1	69.6	69.6	65.5	65.5
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)