

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1303215

Luminaire Tested: P3RT17R209027DE010 E3CBUS1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1303215
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-86)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3RT17R209027DE010 E3CBUS1MW
Description: 3in Adjustable LED luminaire with, R20 optic, 2700K CCT AND, 90CRI , E3CBUS1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1623.0 lumens
Efficiency: N/A
Efficacy: 76.6 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.33
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1303215
CATALOG NUMBER: P3RT17R209027DE010 E3CBUS1MW

Luminous Intensity Polar Plot

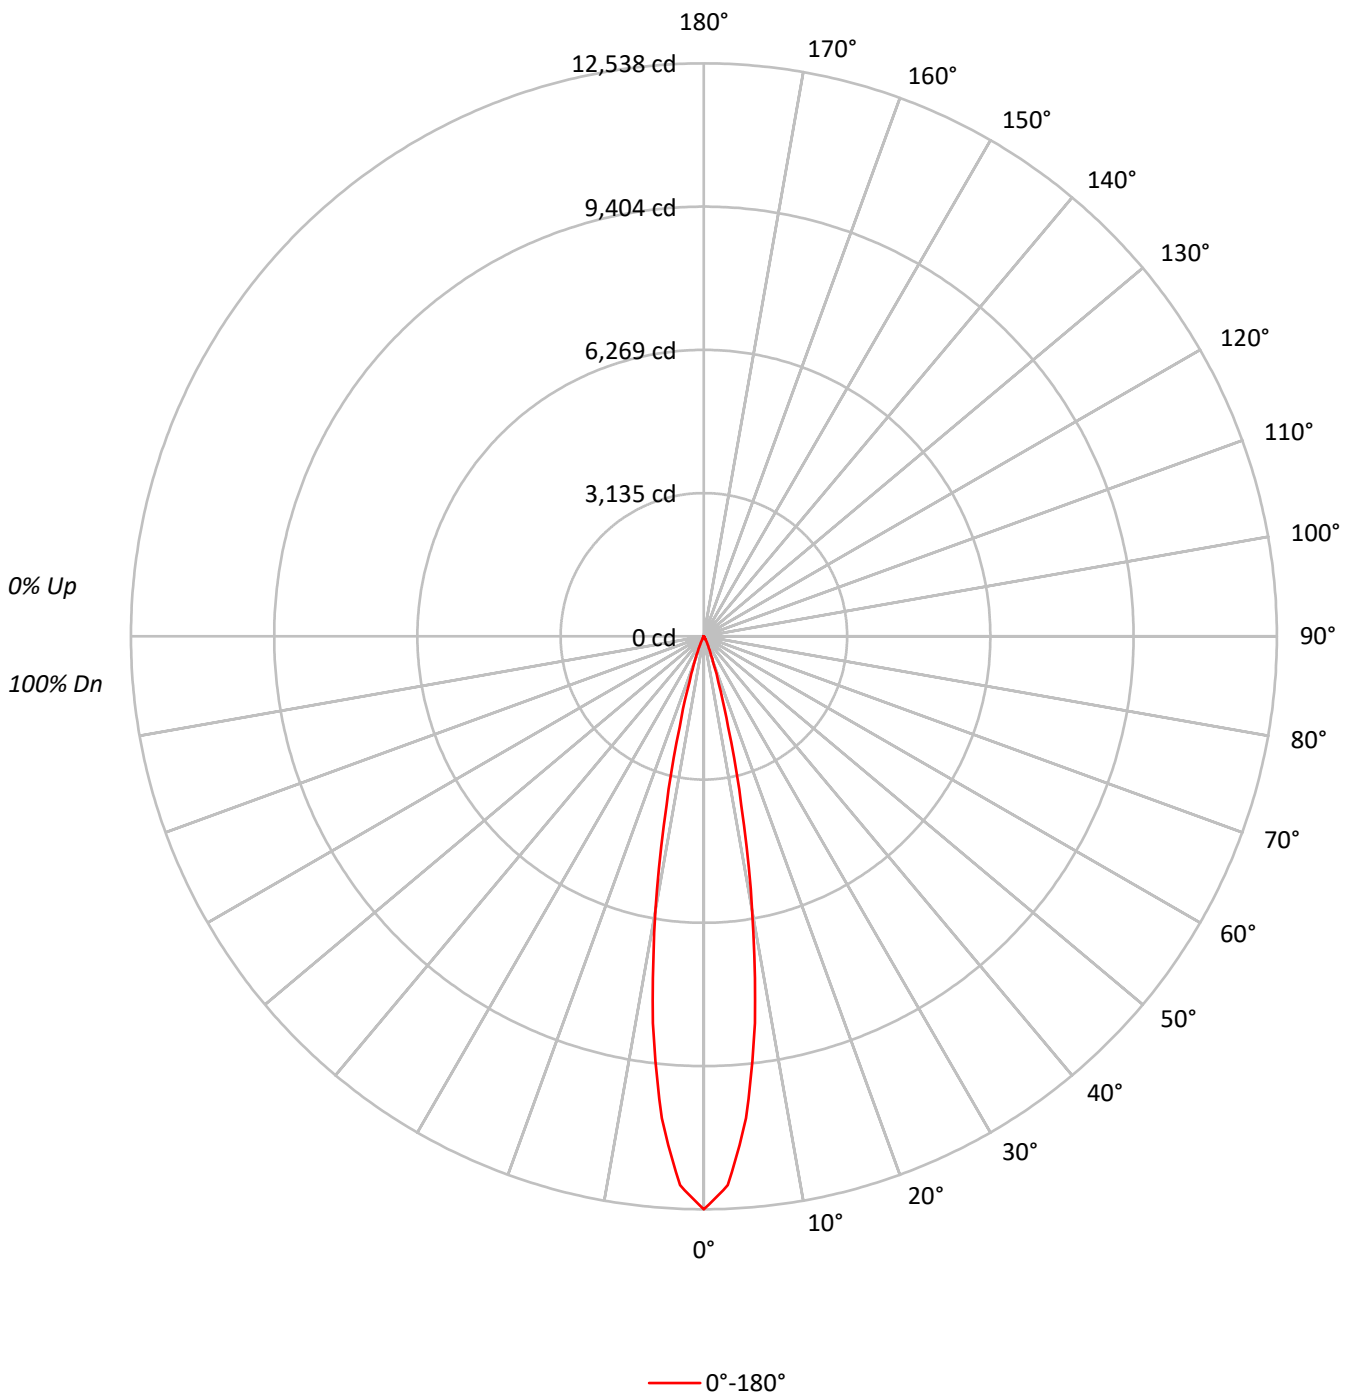



TEST NUMBER: P1303215
 CATALOG NUMBER: P3RT17R209027DE010 E3CBUS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	102	101	100	100	100	100	98
2	113	109	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	97	97	96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	96	95	95	95	94
4	107	103	99	97	106	102	99	96	100	97	95	98	96	94	96	95	93	93	93	92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	91	91	91	91
6	103	98	94	92	102	97	94	91	96	93	91	95	92	90	93	91	90	90	90	89
7	101	95	92	90	100	95	92	89	94	91	89	93	90	89	92	90	88	88	88	87
8	99	93	90	88	98	93	90	88	92	89	87	91	89	87	91	88	87	87	87	86
9	97	92	88	86	96	91	88	86	90	88	86	90	87	85	89	87	85	85	85	84
10	95	90	87	85	95	90	86	84	89	86	84	88	86	84	88	86	84	84	84	83

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2749385
5°	2329490
10°	1354907
15°	465201
20°	134015
25°	41059
30°	11242
35°	6291
40°	2977
45°	806
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 806 cd/sqm



TEST NUMBER: P1303215
 CATALOG NUMBER: P3RT17R209027DE010 E3CBUS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	866.3	53.4
10°-20°	644.8	39.7
20°-30°	94.5	5.8
30°-40°	15.0	0.9
40°-50°	2.4	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1605.6	98.9
0°-40°	1620.6	99.9
0°-60°	1623.0	100.0
0°-90°	1623.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1623.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12538	
5°	10583	866
15°	2049	645
25°	170	94
35°	24	15
45°	3	2
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1303215
CATALOG NUMBER: P3RT17R209027DE010 E3CBUS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	12538.2
2.5°	12021.3
5°	10582.9
7.5°	8538.9
10°	6085.0
12.5°	3777.4
15°	2049.2
17.5°	1059.9
20°	574.3
22.5°	315.9
25°	169.7
27.5°	80.9
30°	44.4
32.5°	31.3
35°	23.5
37.5°	15.7
40°	10.4
42.5°	5.2
45°	2.6
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)