

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1445745

Luminaire Tested: P3ART05R709027DE010 E3CLSWW1MW

Issue Date: 5/8/2026

Test Information

Test Method: LM-79-2019
Report Number: P1445745
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-15)
Test Lab: INNOVATION CENTER
Issue Date: 5/8/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3ART05R709027DE010 E3CLSWW1MW
Description: 3in Adjustable LED luminaire with, R70 optic, 2700K CCT AND, 90CRI , E3CLSWW1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 238.1 lumens
Efficiency: N/A
Efficacy: 33.1 lumens/watt
Spacing Criteria (0/90/45): 1.47 / 0.85 / 1.23
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1445745
CATALOG NUMBER: P3ART05R709027DE010 E3CLSWW1MW

Luminous Intensity Polar Plot

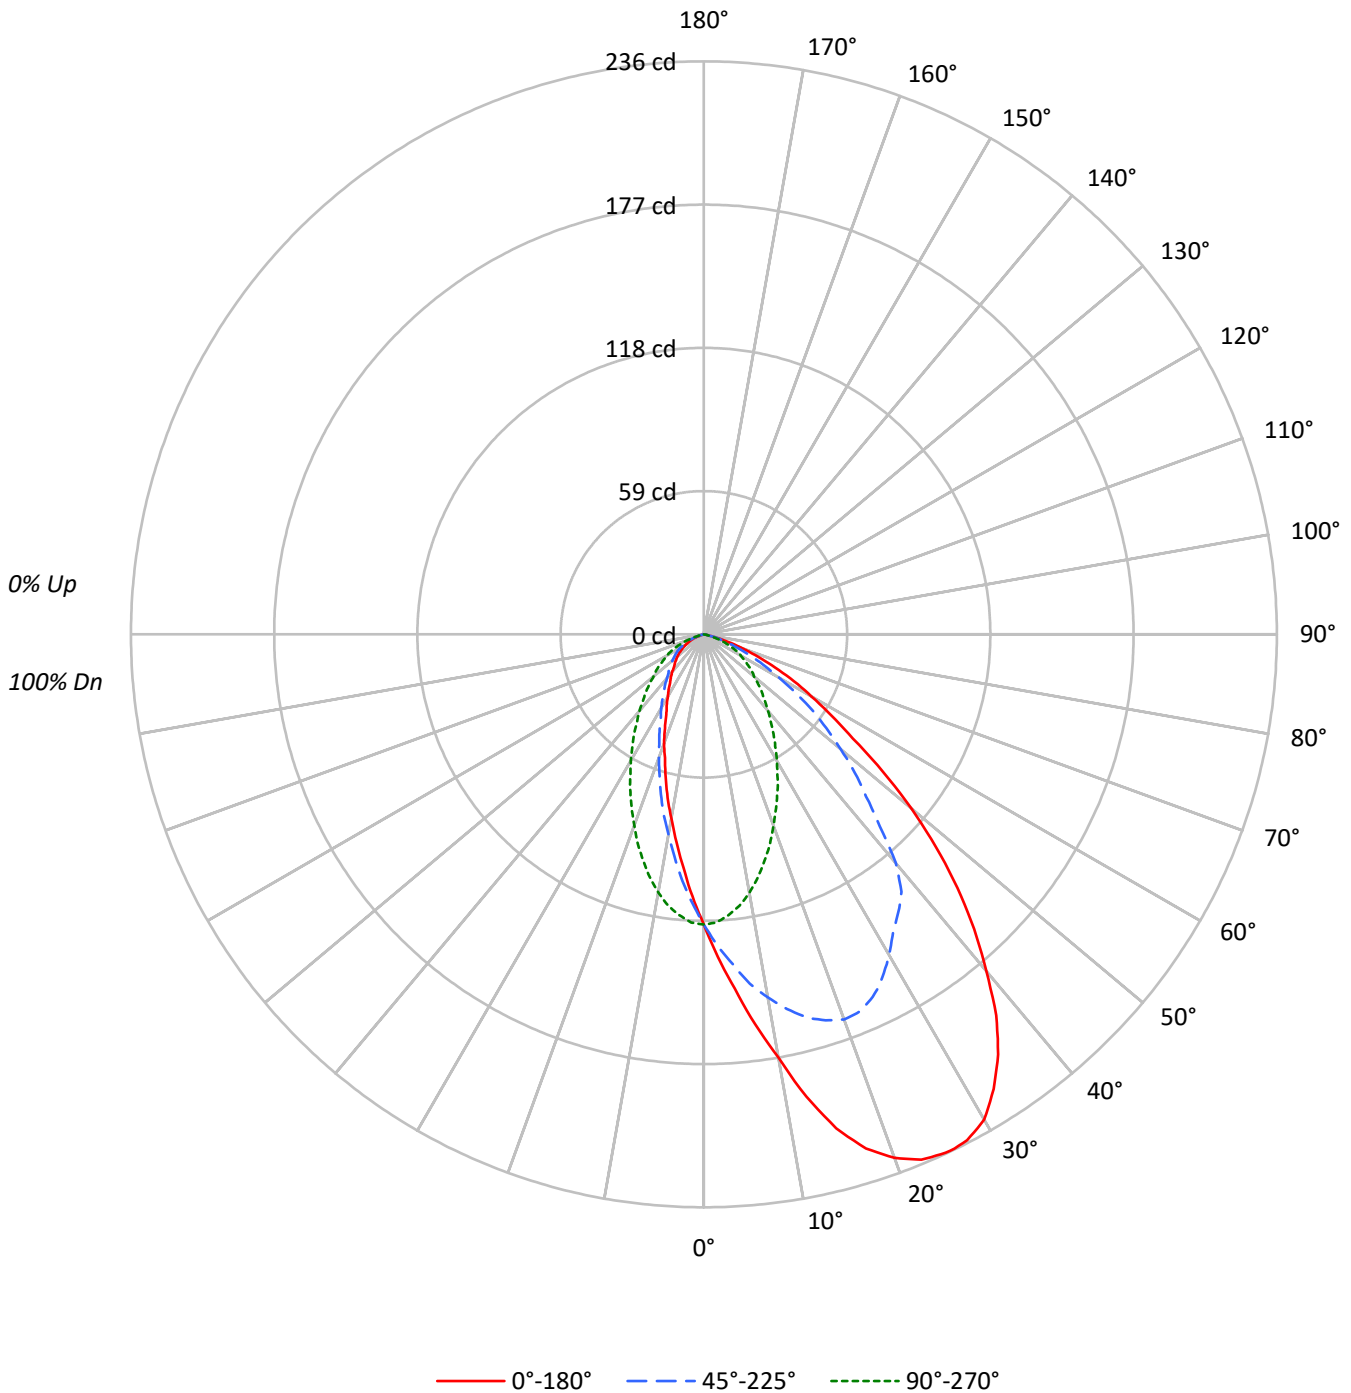



TEST NUMBER: P1445745

CATALOG NUMBER: P3ART05R709027DE010 E3CLSWW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	111	108	104	101	109	105	102	100	101	99	96	97	95	94	94	92	91	91	91	91	89
2	103	96	91	86	101	95	89	85	91	87	83	88	85	81	85	82	80	80	80	80	78
3	95	87	80	74	93	85	79	74	82	77	72	80	75	71	77	73	70	70	70	70	68
4	88	78	70	65	86	77	70	64	74	68	63	72	67	63	70	66	62	62	62	62	60
5	82	71	63	57	80	70	62	57	68	61	56	66	60	56	64	59	55	55	55	55	53
6	76	64	56	51	74	63	56	51	62	55	50	60	54	50	59	53	49	49	49	49	47
7	71	59	51	45	69	58	51	45	57	50	45	55	49	45	54	49	44	44	44	44	43
8	66	54	46	41	65	53	46	41	52	46	41	51	45	41	50	44	40	40	40	40	39
9	62	50	42	37	61	49	42	37	48	42	37	47	41	37	46	41	37	37	37	37	35
10	59	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	34	34	34	32

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	26204	26204	26204	26204	26204
5°	32247	30024	25556	22430	21241
10°	39389	33823	24048	18637	17145
15°	47810	37094	21907	15482	13803
20°	53555	39390	19532	12601	11178
25°	57003	39849	17324	10452	8831
30°	58465	38639	15218	8887	7520
35°	56563	37397	13385	7602	6505
40°	51783	35180	11794	6756	5811
45°	45834	29305	10482	6295	5241
50°	38003	25108	9211	5765	4844
55°	28635	20912	8525	5429	4396
60°	22498	15700	7719	5043	3859
65°	16811	11571	6641	4203	3165
70°	10835	7373	4744	3013	1731
75°	4575	3982	2288	1186	593
80°	884	884	0	0	0
85°	0	0	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 45834 cd/sqm



TEST NUMBER: P1445745

CATALOG NUMBER: P3ART05R709027DE010 E3CLSWW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	11.3	4.8
10°-20°	32.6	13.7
20°-30°	47.7	20.0
30°-40°	52.0	21.8
40°-50°	45.0	18.9
50°-60°	30.1	12.7
60°-70°	15.6	6.5
70°-80°	3.7	1.6
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	91.7	38.5
0°-40°	143.6	60.3
0°-60°	218.8	91.9
0°-90°	238.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	238.1	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	120	120	120	120	120	
5°	146	136	116	102	96	15
15°	211	163	96	68	61	60
25°	236	165	72	43	36	108
35°	211	140	50	28	24	131
45°	148	94	34	20	17	113
55°	75	55	22	14	12	69
65°	32	22	13	8	6	33
75°	5	5	3	1	1	7
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P1445745

CATALOG NUMBER: P3ART05R709027DE010 E3CLSWW1MW

CANDELA DISTRIBUTION (FULL):

	0°	5°	15°	25°	35°	45°	55°	65°	75°	85°	90°
0°	119.5	119.5	119.5	119.5	119.5	119.5	119.5	119.5	119.5	119.5	119.5
2.5°	133.0	132.3	132.3	131.0	129.6	128.3	126.2	124.2	122.2	120.2	118.8
5°	146.5	147.2	146.5	143.8	140.4	136.4	132.3	127.6	122.9	118.8	116.1
7.5°	162.0	162.0	160.0	156.6	151.9	145.1	138.4	130.3	122.9	116.1	112.7
10°	176.9	176.9	173.5	168.1	160.7	151.9	142.4	131.6	121.5	112.1	108.0
12.5°	195.1	194.4	190.4	181.6	170.8	158.0	145.1	131.6	119.5	108.0	102.6
15°	210.6	209.9	204.5	193.7	179.6	163.4	145.8	130.3	115.4	102.6	96.5
17.5°	222.1	220.7	214.7	203.2	187.0	166.7	146.5	127.6	110.7	96.5	90.5
20°	229.5	228.8	222.1	208.6	191.0	168.8	145.8	124.2	106.0	90.5	83.7
22.5°	234.2	232.9	226.1	211.3	191.0	168.1	143.1	119.5	99.9	84.4	77.6
25°	235.6	234.9	226.8	210.6	189.0	164.7	139.1	114.8	93.8	78.3	71.6
26°	235.6	234.9	226.8	209.9	187.7	162.7	137.0	112.7	91.8	75.6	69.5
27.5°	234.9	234.2	225.5	207.9	185.0	159.3	133.0	108.7	87.8	72.2	65.5
30°	230.9	229.5	220.7	203.2	178.9	152.6	126.2	102.6	81.7	66.2	60.1
32.5°	222.1	220.7	211.3	195.1	172.1	145.1	118.8	95.9	75.6	60.1	54.7
35°	211.3	209.9	200.5	185.0	162.7	139.7	110.7	88.4	68.9	55.4	50.0
37.5°	197.8	195.8	187.7	171.5	151.2	133.7	104.0	81.0	62.8	50.0	45.2
40°	180.9	180.2	172.8	158.0	137.7	122.9	99.9	81.0	57.4	45.2	41.2
42.5°	164.7	163.4	156.6	143.8	125.6	107.3	87.8	77.6	53.3	40.5	37.1
45°	147.8	146.5	140.4	129.6	112.7	94.5	81.0	66.8	45.9	37.1	33.8
47.5°	129.6	128.3	123.5	115.4	100.6	84.4	68.9	54.7	41.9	33.1	30.4
50°	111.4	112.1	108.0	99.9	88.4	73.6	59.4	45.9	35.8	29.7	27.0
52.5°	93.2	92.5	89.8	84.4	76.3	63.5	50.6	39.2	31.1	26.3	25.0
55°	74.9	75.6	74.3	70.9	64.1	54.7	42.5	33.8	27.7	23.6	22.3
57.5°	62.1	62.8	60.1	58.1	52.7	44.6	35.1	28.4	23.6	20.9	19.6
60°	51.3	52.0	50.0	47.3	43.2	35.8	28.4	23.6	20.9	18.9	17.6
62.5°	41.9	41.2	39.8	37.1	33.8	28.4	23.0	19.6	17.6	16.2	15.5
65°	32.4	32.4	31.1	29.0	26.3	22.3	18.2	16.2	14.9	13.5	12.8
67.5°	24.3	24.3	23.0	21.6	18.9	16.2	14.2	12.8	12.2	10.8	10.1
70°	16.9	16.9	16.2	15.5	13.5	11.5	10.8	9.5	8.8	8.1	7.4
72.5°	10.8	10.8	10.8	9.5	8.8	7.4	7.4	6.8	6.1	5.4	5.4
75°	5.4	6.1	5.4	5.4	4.7	4.7	4.1	4.1	3.4	3.4	2.7
77.5°	2.0	2.0	2.0	2.0	2.0	2.0	1.4	1.4	1.4	1.4	1.4
80°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1445745

CATALOG NUMBER: P3ART05R709027DE010 E3CLSWW1MW

CANDELA DISTRIBUTION (continued):

	95°	105°	115°	125°	135°	145°	155°	165°	175°	180°
0°	119.5	119.5	119.5	119.5	119.5	119.5	119.5	119.5	119.5	119.5
2.5°	117.5	115.4	114.1	112.1	110.7	109.4	108.7	108.0	108.0	108.0
5°	114.1	110.7	107.3	104.0	101.9	99.9	97.9	97.2	96.5	96.5
7.5°	110.0	104.6	99.9	95.9	92.5	90.5	88.4	87.1	86.4	86.4
10°	104.6	97.9	92.5	87.1	83.7	81.0	79.7	77.6	77.6	77.0
12.5°	98.6	90.5	84.4	79.7	76.3	72.9	70.9	69.5	68.9	68.9
15°	91.8	83.7	77.0	71.6	68.2	64.8	62.8	61.4	60.8	60.8
17.5°	85.1	76.3	69.5	64.1	60.8	57.4	55.4	54.0	54.0	53.3
20°	78.3	69.5	62.8	57.4	54.0	51.3	49.3	47.9	47.3	47.9
22.5°	72.2	63.5	56.7	52.0	47.9	45.2	43.2	42.5	41.9	41.9
25°	65.5	57.4	51.3	46.6	43.2	40.5	38.5	37.8	37.1	36.5
26°	63.5	55.4	49.3	44.6	41.2	38.5	37.1	35.8	35.1	35.1
27.5°	60.8	52.0	46.6	41.9	38.5	36.5	34.4	33.8	33.1	33.1
30°	54.7	47.3	41.9	37.8	35.1	32.4	31.1	30.4	29.7	29.7
32.5°	50.0	42.5	37.8	34.4	31.7	29.7	28.4	27.0	27.0	27.0
35°	45.2	38.5	34.4	31.1	28.4	26.3	25.7	25.0	24.3	24.3
37.5°	41.2	35.1	31.1	28.4	26.3	24.3	23.0	22.3	22.3	22.3
40°	37.1	32.4	28.4	25.7	23.6	22.3	20.9	20.3	20.3	20.3
42.5°	33.8	29.0	26.3	23.6	21.6	20.3	19.6	18.9	18.2	18.2
45°	31.1	27.0	23.6	21.6	20.3	18.9	17.6	16.9	16.9	16.9
47.5°	27.7	25.0	21.6	19.6	18.2	16.9	16.2	15.5	15.5	15.5
50°	25.7	23.0	20.3	18.2	16.9	15.5	14.9	14.2	14.2	14.2
52.5°	23.0	20.9	18.9	16.9	15.5	14.2	13.5	12.8	12.8	12.8
55°	20.9	18.9	16.9	15.5	14.2	12.8	12.2	11.5	11.5	11.5
57.5°	18.9	16.9	15.5	14.2	12.8	12.2	10.8	10.8	10.1	10.1
60°	16.9	14.9	13.5	12.8	11.5	10.8	9.5	8.8	8.8	8.8
62.5°	14.2	13.5	12.2	10.8	9.5	8.8	8.1	7.4	7.4	7.4
65°	12.2	11.5	10.1	8.8	8.1	7.4	6.8	6.1	6.1	6.1
67.5°	10.1	8.8	8.1	7.4	6.8	6.1	5.4	4.7	4.1	4.7
70°	7.4	6.8	6.1	5.4	4.7	4.1	3.4	3.4	2.7	2.7
72.5°	4.7	4.1	4.1	3.4	2.7	2.7	2.0	2.0	1.4	1.4
75°	2.7	2.7	2.0	2.0	1.4	1.4	0.7	0.7	0.7	0.7
77.5°	1.4	0.7	0.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)