

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1303853

Luminaire Tested: P3RT13R209050DE010 E3CBUS1MW

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1303853  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-86)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3RT13R209050DE010 E3CBUS1MW  
Description: 3in Adjustable LED luminaire with, R20 optic, 5000K CCT AND, 90CRI , E3CBUS1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1434.0 lumens  
Efficiency: N/A  
Efficacy: 98.2 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.33  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 14.6  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1303853  
CATALOG NUMBER: P3RT13R209050DE010 E3CBUS1MW

### Luminous Intensity Polar Plot

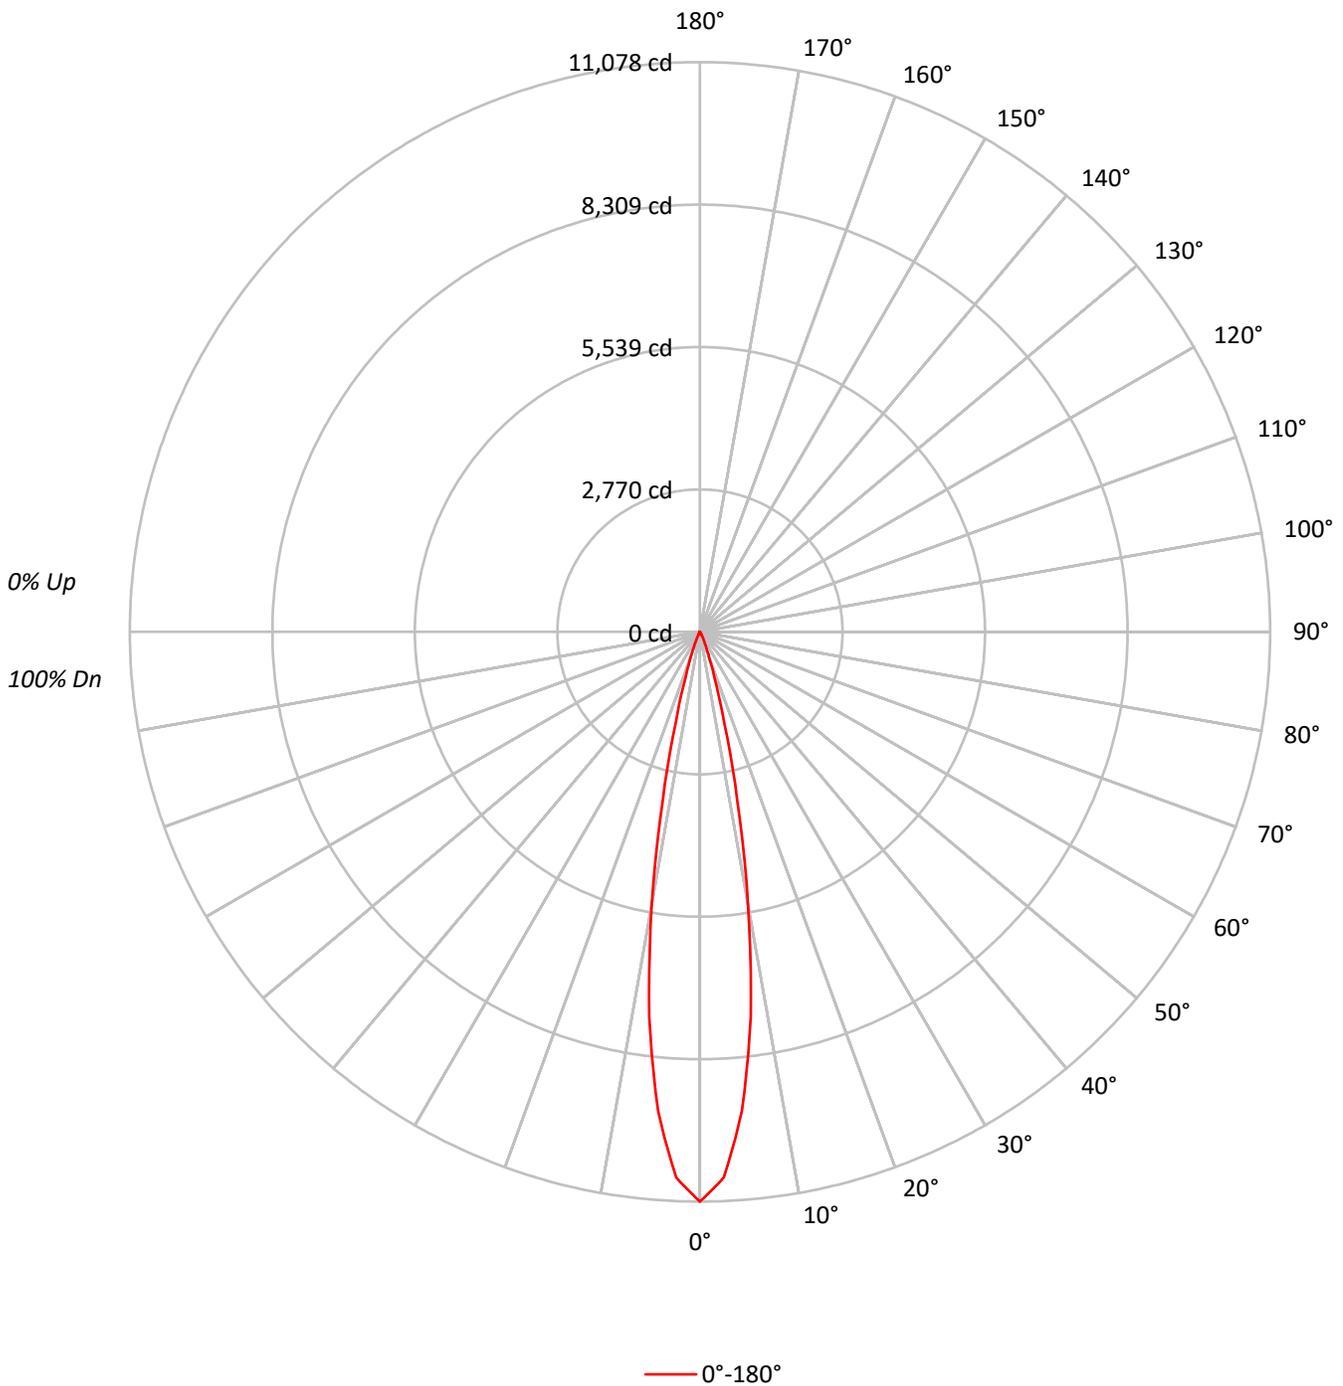



TEST NUMBER: P1303853  
 CATALOG NUMBER: P3RT13R209050DE010 E3CBUS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	102	101	100	100	98	98	98	98
2	113	109	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96	96	96	96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	96	95	94	94	94	94
4	107	103	99	97	106	102	99	96	100	97	95	98	96	94	96	95	93	92	92	92	92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	91	91	91	91	91
6	103	98	94	92	102	97	94	91	96	93	91	95	92	90	93	91	90	89	89	89	89
7	101	95	92	90	100	95	92	89	94	91	89	93	90	89	92	90	88	87	87	87	87
8	99	93	90	88	98	93	90	88	92	89	87	91	89	87	91	88	87	86	86	86	86
9	97	92	88	86	96	91	88	86	90	88	86	90	87	85	89	87	85	84	84	84	84
10	95	90	87	85	95	90	86	84	89	86	84	88	86	84	88	86	84	83	83	83	83

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2429213
5°	2058216
10°	1197128
15°	411035
20°	118404
25°	36268
30°	9926
35°	5568
40°	2634
45°	713
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 713 cd/sqm



TEST NUMBER: P1303853  
 CATALOG NUMBER: P3RT13R209050DE010 E3CBUS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	765.4	53.4
10°-20°	569.7	39.7
20°-30°	83.5	5.8
30°-40°	13.2	0.9
40°-50°	2.1	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1418.6	98.9
0°-40°	1431.9	99.9
0°-60°	1434.0	100.0
0°-90°	1434.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1434.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	11078	
5°	9350	765
15°	1811	570
25°	150	83
35°	21	13
45°	2	2
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1303853

CATALOG NUMBER: P3RT13R209050DE010 E3CBUS1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	11078.1
2.5°	10621.4
5°	9350.5
7.5°	7544.5
10°	5376.4
12.5°	3337.5
15°	1810.6
17.5°	936.4
20°	507.4
22.5°	279.1
25°	149.9
27.5°	71.5
30°	39.2
32.5°	27.7
35°	20.8
37.5°	13.8
40°	9.2
42.5°	4.6
45°	2.3
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)