

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1303983

Luminaire Tested: P3RT05R409727DE010 E3CBUS1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1303983
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-90)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3RT05R409727DE010 E3CBUS1MW
Description: 3in Adjustable LED luminaire with, R40 optic, 2700K CCT AND, 97CRI , E3CBUS1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 616.0 lumens
Efficiency: N/A
Efficacy: 85.6 lumens/watt
Spacing Criteria (0/90/45): 0.64 / 0.64 / 0.55
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1303983
CATALOG NUMBER: P3RT05R409727DE010 E3CBUS1MW

Luminous Intensity Polar Plot

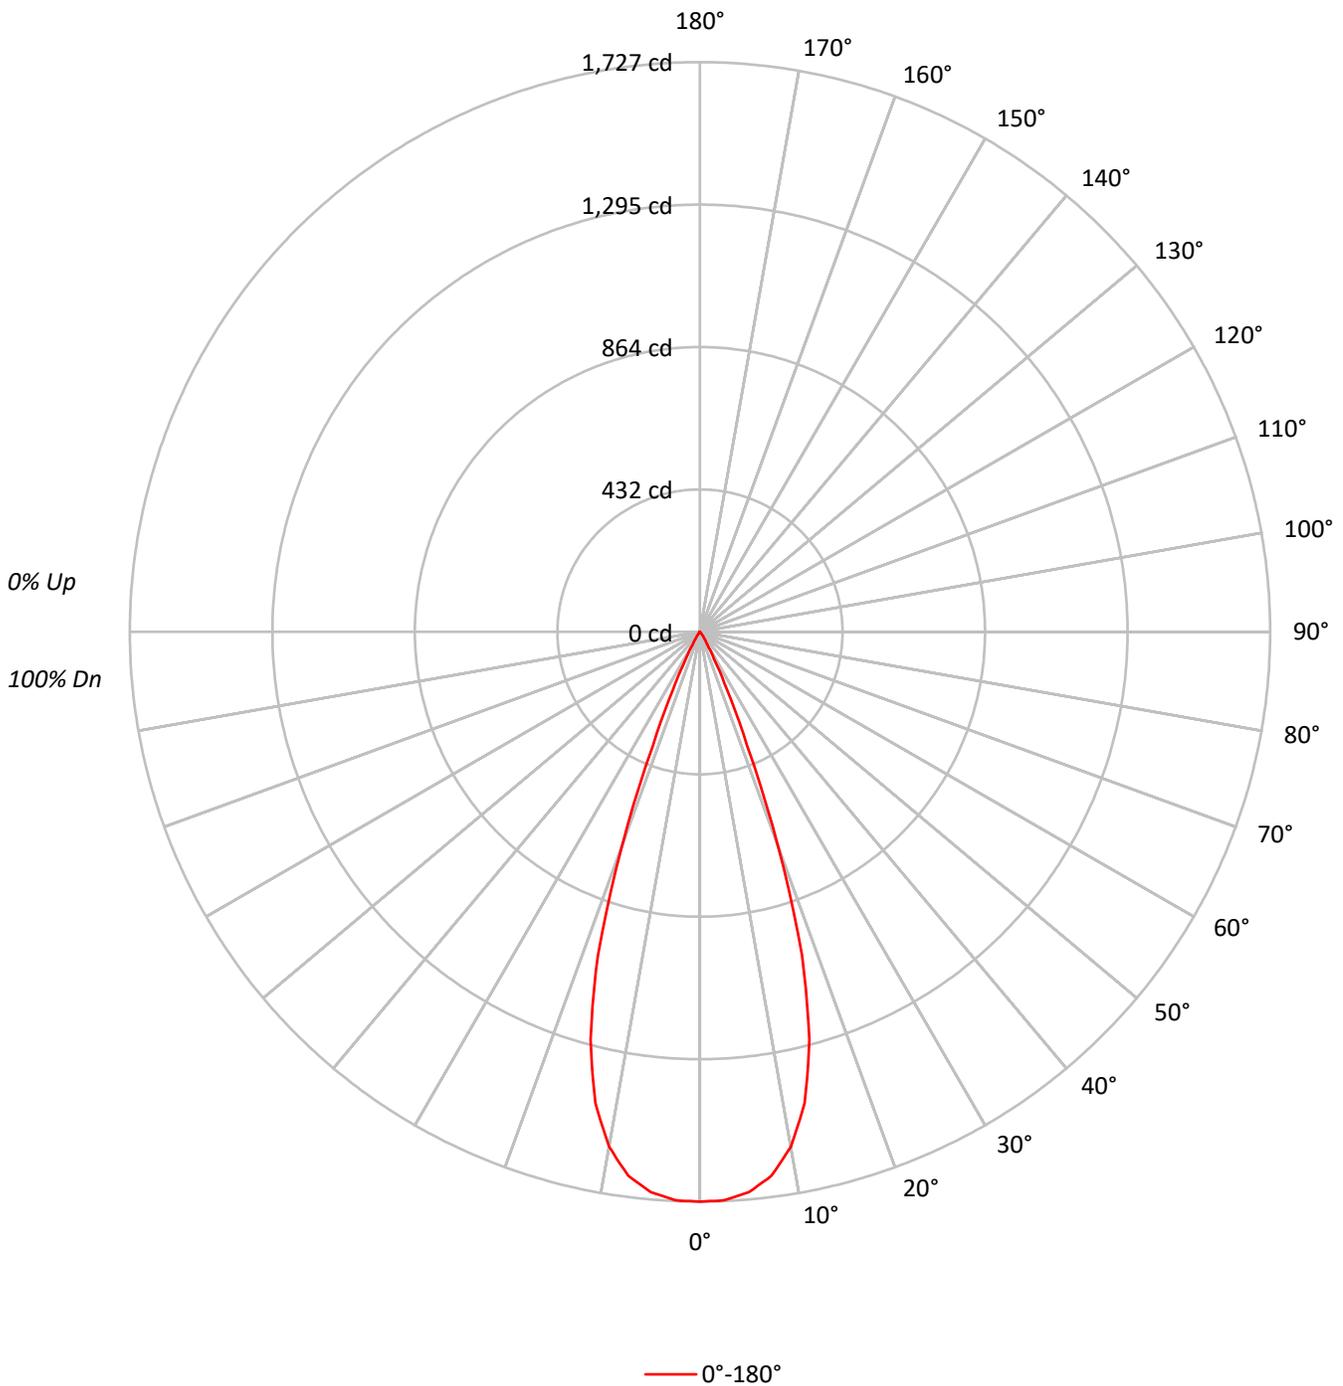



TEST NUMBER: P1303983
 CATALOG NUMBER: P3RT05R409727DE010 E3CBUS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98
1	115	113	111	109	113	111	109	107	107	105	104	103	102	101	100	99	98	96	96	96
2	111	107	104	102	109	106	103	101	103	100	98	100	98	96	97	96	94	93	93	93
3	107	103	99	96	106	101	98	95	99	96	94	97	94	92	94	93	91	90	90	90
4	104	98	94	91	102	97	94	91	95	92	90	94	91	89	92	90	88	87	87	87
5	101	95	90	87	99	94	90	87	92	89	86	91	88	86	89	87	85	84	84	84
6	98	91	87	84	96	90	86	84	89	86	83	88	85	83	87	84	82	81	81	81
7	95	88	84	81	94	87	83	80	86	83	80	85	82	80	84	81	79	78	78	78
8	92	85	81	78	91	85	80	78	84	80	77	83	79	77	82	79	77	76	76	76
9	89	82	78	75	88	82	78	75	81	77	75	80	77	75	80	77	74	73	73	73
10	87	80	76	73	86	79	75	73	79	75	73	78	75	72	77	74	72	71	71	71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	378742
5°	375170
10°	352766
15°	290671
20°	160967
25°	46672
30°	11521
35°	4149
40°	1031
45°	0
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 0 cd/sqm



TEST NUMBER: P1303983

CATALOG NUMBER: P3RT05R409727DE010 E3CBUS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	159.0	25.8
10°-20°	335.1	54.4
20°-30°	110.3	17.9
30°-40°	11.1	1.8
40°-50°	0.5	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	604.4	98.1
0°-40°	615.5	99.9
0°-60°	616.0	100.0
0°-90°	616.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	616.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1727	
5°	1704	159
15°	1280	335
25°	193	110
35°	16	11
45°	0	0
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1303983
CATALOG NUMBER: P3RT05R409727DE010 E3CBUS1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	1727.2
2.5°	1724.4
5°	1704.4
7.5°	1662.6
10°	1584.3
12.5°	1463.3
15°	1280.4
17.5°	1028.3
20°	689.8
22.5°	372.2
25°	192.9
27.5°	91.9
30°	45.5
32.5°	25.5
35°	15.5
37.5°	8.2
40°	3.6
42.5°	0.9
45°	0.0
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)