

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1304457

Luminaire Tested: P3RT02R129740DE010 E3BUS1WH

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1304457  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-24)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3RT02R129740DE010 E3BUS1WH  
Description: 3in Adjustable LED luminaire with, R12 optic, 4000K CCT AND, 97CRI , E3BUS1WH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 303.0 lumens  
Efficiency: N/A  
Efficacy: 81.9 lumens/watt  
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.22  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 3.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1304457  
CATALOG NUMBER: P3RT02R129740DE010 E3BUS1WH

### Luminous Intensity Polar Plot

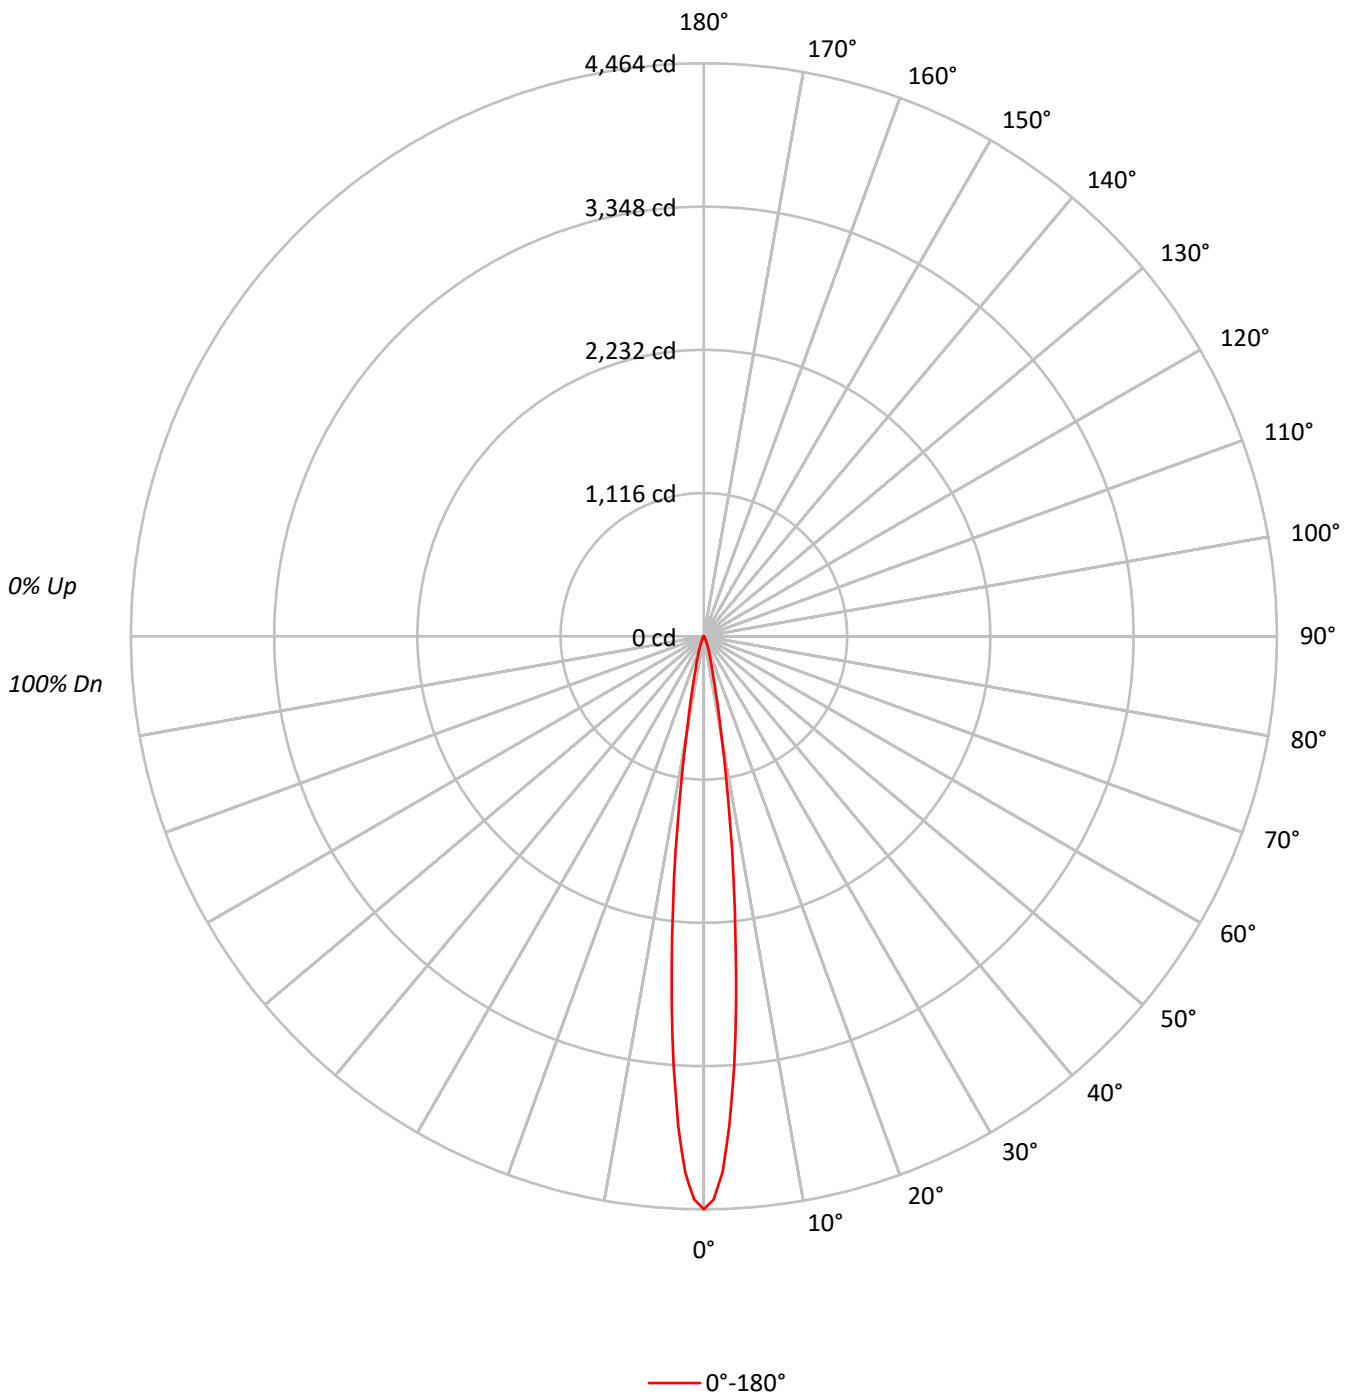



TEST NUMBER: P1304457  
 CATALOG NUMBER: P3RT02R129740DE010 E3BUS1WH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |     | 0   |     |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 | 100 |
| 1   | 116 | 114 | 113 | 111 | 114 | 112 | 111 | 109 | 108 | 107 | 106 | 104 | 104 | 103 | 101 | 101 | 100 | 98  | 98  | 98  | 98  |
| 2   | 113 | 110 | 108 | 106 | 111 | 108 | 106 | 104 | 105 | 104 | 102 | 103 | 101 | 100 | 100 | 99  | 98  | 97  | 97  | 97  | 97  |
| 3   | 110 | 107 | 104 | 102 | 109 | 105 | 103 | 101 | 103 | 101 | 99  | 101 | 99  | 98  | 99  | 98  | 96  | 95  | 95  | 95  | 95  |
| 4   | 108 | 104 | 101 | 98  | 107 | 103 | 100 | 98  | 101 | 99  | 97  | 99  | 97  | 96  | 98  | 96  | 95  | 94  | 94  | 94  | 94  |
| 5   | 106 | 102 | 98  | 96  | 105 | 101 | 98  | 96  | 99  | 97  | 95  | 98  | 96  | 94  | 97  | 95  | 93  | 92  | 92  | 92  | 92  |
| 6   | 104 | 99  | 96  | 94  | 103 | 99  | 96  | 94  | 98  | 95  | 93  | 96  | 94  | 93  | 95  | 93  | 92  | 91  | 91  | 91  | 91  |
| 7   | 102 | 98  | 94  | 92  | 101 | 97  | 94  | 92  | 96  | 93  | 92  | 95  | 93  | 91  | 94  | 92  | 91  | 90  | 90  | 90  | 90  |
| 8   | 101 | 96  | 93  | 91  | 100 | 95  | 93  | 90  | 95  | 92  | 90  | 94  | 92  | 90  | 93  | 91  | 90  | 89  | 89  | 89  | 89  |
| 9   | 99  | 94  | 91  | 89  | 98  | 94  | 91  | 89  | 93  | 91  | 89  | 93  | 90  | 89  | 92  | 90  | 88  | 88  | 88  | 88  | 88  |
| 10  | 98  | 93  | 90  | 88  | 97  | 93  | 90  | 88  | 92  | 90  | 88  | 91  | 89  | 88  | 91  | 89  | 87  | 87  | 87  | 87  | 87  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 978847 |
| 5°  | 632466 |
| 10° | 178442 |
| 15° | 50466  |
| 20° | 21095  |
| 25° | 9339   |
| 30° | 4760   |
| 35° | 2516   |
| 40° | 1088   |
| 45° | 279    |
| 50° | 307    |
| 55° | 0      |
| 60° | 0      |
| 65° | 0      |
| 70° | 0      |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 50°  
 Luminance: 307 cd/sqm



TEST NUMBER: P1304457  
 CATALOG NUMBER: P3RT02R129740DE010 E3BUS1WH

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 202.4  | 66.8      |
| 10°-20°   | 73.5   | 24.2      |
| 20°-30°   | 19.7   | 6.5       |
| 30°-40°   | 6.2    | 2.0       |
| 40°-50°   | 1.1    | 0.4       |
| 50°-60°   | 0.1    | 0.0       |
| 60°-70°   | 0.0    | 0.0       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 295.6  | 97.5      |
| 0°-40°    | 301.7  | 99.6      |
| 0°-60°    | 303.0  | 100.0     |
| 0°-90°    | 303.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 303.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 4464 |      |
| 5°  | 2873 | 202  |
| 15° | 222  | 73   |
| 25° | 39   | 20   |
| 35° | 9    | 6    |
| 45° | 1    | 1    |
| 55° | 0    | 0    |
| 65° | 0    | 0    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P1304457  
CATALOG NUMBER: P3RT02R129740DE010 E3BUS1WH

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 4463.9 |
| 1°    | 4388.6 |
| 2°    | 4176.7 |
| 3°    | 3814.1 |
| 4°    | 3363.9 |
| 5°    | 2873.3 |
| 6°    | 2361.9 |
| 7°    | 1904.2 |
| 8°    | 1465.4 |
| 9°    | 1090.6 |
| 10°   | 801.4  |
| 11°   | 590.5  |
| 12°   | 444.5  |
| 13°   | 344.7  |
| 14°   | 273.1  |
| 15°   | 222.3  |
| 17.5° | 141.3  |
| 20°   | 90.4   |
| 22.5° | 58.4   |
| 25°   | 38.6   |
| 27.5° | 26.4   |
| 30°   | 18.8   |
| 32.5° | 13.2   |
| 35°   | 9.4    |
| 37.5° | 6.6    |
| 40°   | 3.8    |
| 42.5° | 1.9    |
| 45°   | 0.9    |
| 47.5° | 0.9    |
| 50°   | 0.9    |
| 52.5° | 0.0    |
| 55°   | 0.0    |
| 57.5° | 0.0    |
| 60°   | 0.0    |
| 62.5° | 0.0    |
| 65°   | 0.0    |
| 67.5° | 0.0    |
| 70°   | 0.0    |
| 72.5° | 0.0    |
| 75°   | 0.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |



TEST NUMBER: P1304457  
CATALOG NUMBER: P3RT02R129740DE010 E3BUS1WH

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)