

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1304924

Luminaire Tested: P3RT05R35B2750DE010 E3CBUS1MW_3000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1304924
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-89)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3RT05R35B2750DE010 E3CBUS1MW_3000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R35 optic, 3000K CCT AND, 90CRI , E3CBUS1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 546.0 lumens
Efficiency: N/A
Efficacy: 92.5 lumens/watt
Spacing Criteria (0/90/45): 0.55 / 0.55 / 0.5
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1304924
CATALOG NUMBER: P3RT05R35B2750DE010 E3CBUS1MW_3000K

Luminous Intensity Polar Plot

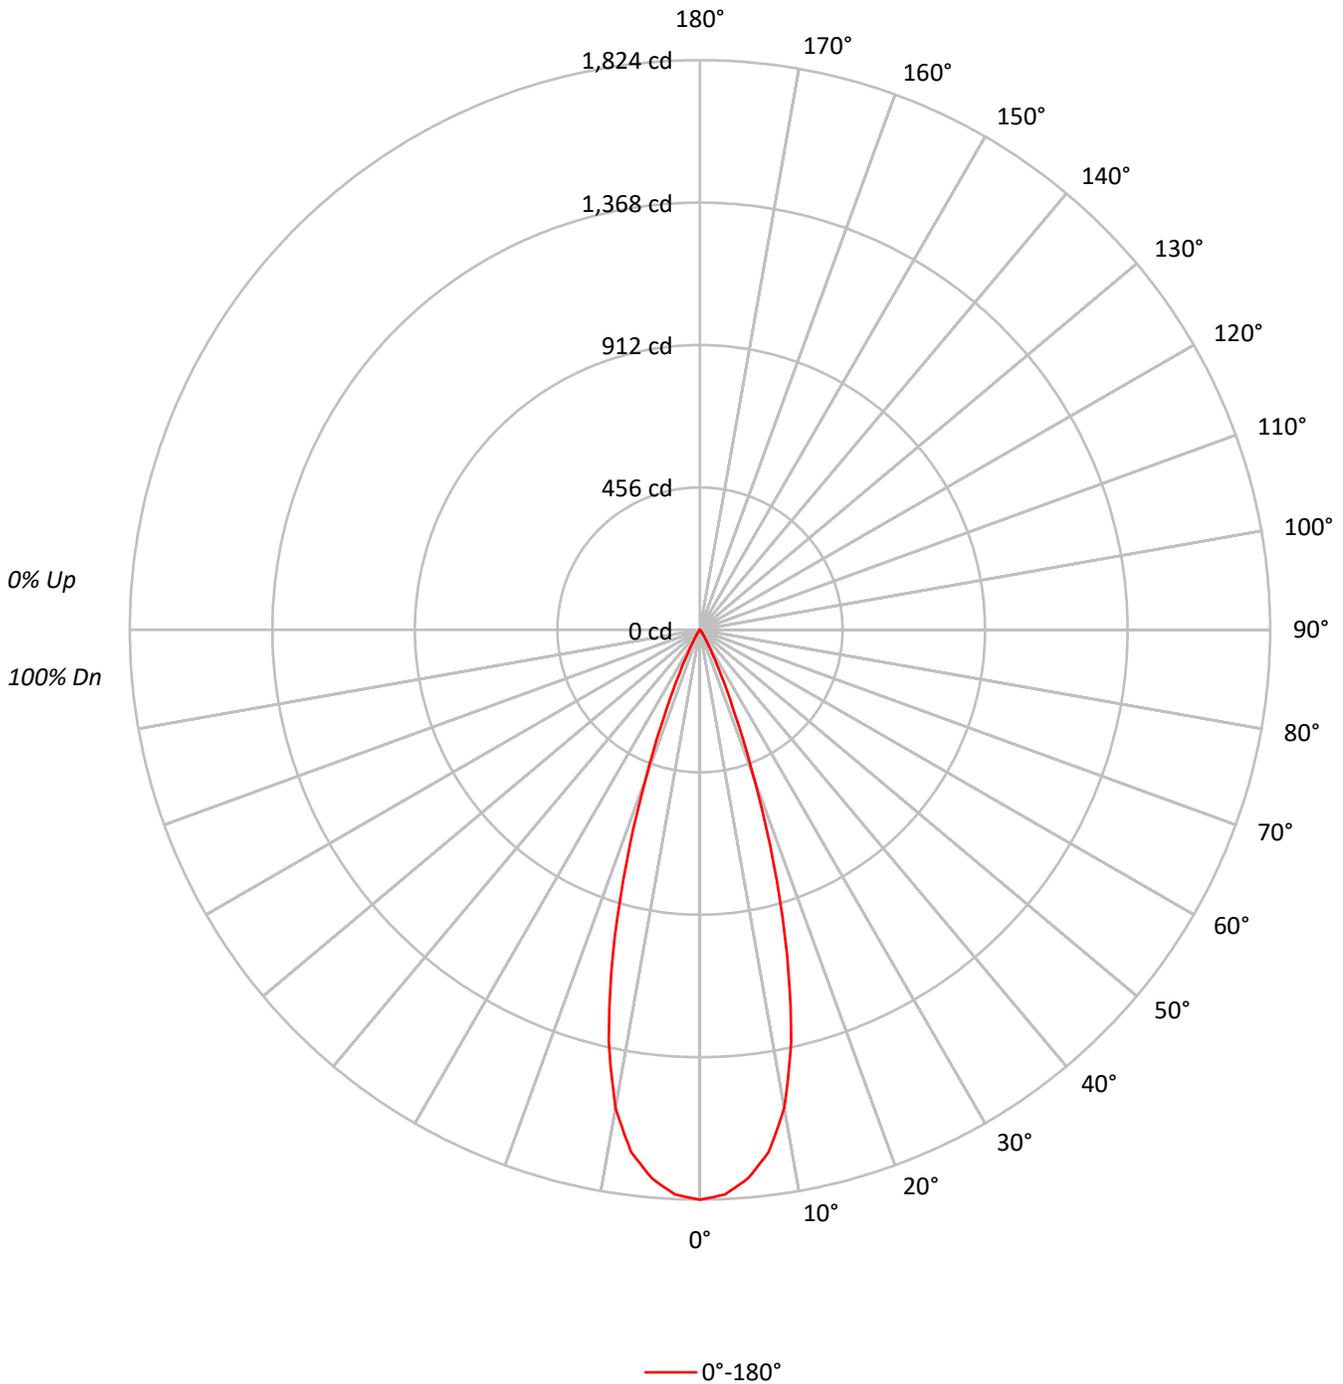



TEST NUMBER: P1304924

CATALOG NUMBER: P3RT05R35B2750DE010 E3CBUS1MW_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	113	111	109	108	107	105	104	103	102	101	100	99	98	97
2	111	108	105	102	109	106	103	101	103	101	99	100	98	97	97	96	95	93
3	108	103	99	97	106	102	98	96	99	97	94	97	95	93	95	93	92	90
4	104	99	95	92	103	98	94	92	96	93	90	94	92	89	92	90	89	87
5	101	95	91	88	100	94	91	88	93	90	87	91	89	86	90	88	86	85
6	98	92	88	85	97	91	87	85	90	87	84	89	86	83	88	85	83	82
7	95	89	85	82	94	88	84	82	87	84	81	86	83	81	85	83	80	79
8	93	86	82	79	92	86	82	79	85	81	79	84	81	78	83	80	78	77
9	90	83	79	77	89	83	79	76	82	79	76	82	78	76	81	78	76	75
10	88	81	77	74	87	81	77	74	80	76	74	79	76	74	79	76	74	73

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	399990
5°	388047
10°	346019
15°	244451
20°	117914
25°	38204
30°	10761
35°	4310
40°	1202
45°	0
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 0 cd/sqm



TEST NUMBER: P1304924

CATALOG NUMBER: P3RT05R35B2750DE010 E3CBUS1MW_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	161.9	29.7
10°-20°	284.6	52.1
20°-30°	87.5	16.0
30°-40°	11.4	2.1
40°-50°	0.7	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	533.9	97.8
0°-40°	545.3	99.9
0°-60°	546.0	100.0
0°-90°	546.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	546.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1824	
5°	1763	162
15°	1077	285
25°	158	87
35°	16	11
45°	0	1
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1304924
CATALOG NUMBER: P3RT05R35B2750DE010 E3CBUS1MW_3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1824.1
2.5°	1809.6
5°	1762.9
7.5°	1685.6
10°	1554.0
12.5°	1348.5
15°	1076.8
17.5°	781.3
20°	505.3
22.5°	293.0
25°	157.9
27.5°	83.2
30°	42.5
32.5°	25.5
35°	16.1
37.5°	10.2
40°	4.2
42.5°	1.7
45°	0.0
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)