

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1245592

Luminaire Tested: P3AS02R159024DE010 E3CD1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1245592
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-4)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R159024DE010 E3CD1MMS
Description: 3in Adjustable LED luminaire with, R15 optic, 2400K CCT AND, 90CRI , E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 272.0 lumens
Efficiency: N/A
Efficacy: 75.5 lumens/watt
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.29
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1245592

CATALOG NUMBER: P3AS02R159024DE010 E3CD1MMS

Luminous Intensity Polar Plot

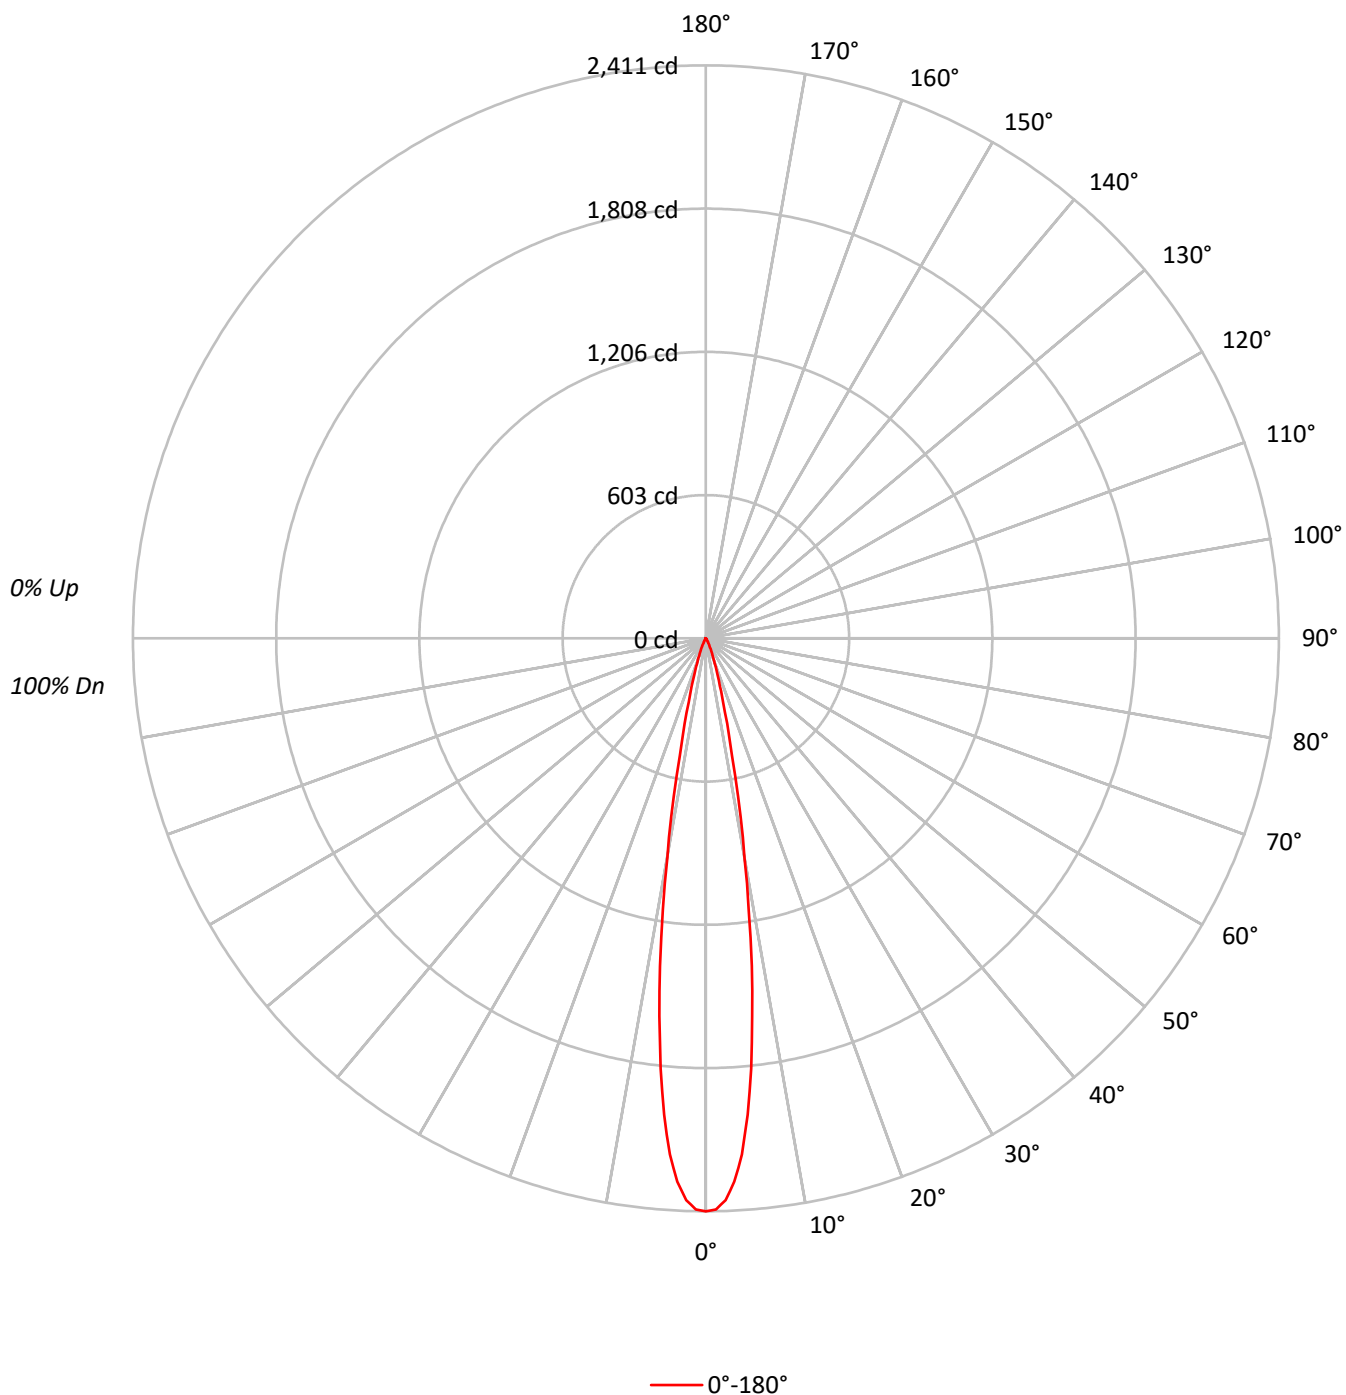

TEST NUMBER: P1245592

CATALOG NUMBER: P3AS02R159024DE010 E3CD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98		
2	113	110	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96		
3	110	106	103	101	108	105	102	100	102	100	98	100	98	97	98	97	95	94		
4	107	103	100	97	106	102	99	97	100	97	96	98	96	94	97	95	93	92		
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	92	91		
6	103	98	94	92	102	97	94	92	96	93	91	95	92	91	94	92	90	89		
7	101	96	92	90	100	95	92	90	94	91	89	93	91	89	92	90	89	88		
8	99	94	91	88	98	93	90	88	93	90	88	92	89	87	91	89	87	86		
9	97	92	89	87	97	92	89	87	91	88	86	90	88	86	90	87	86	85		
10	96	90	87	85	95	90	87	85	89	87	85	89	86	85	88	86	85	84		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	528708
5°	443098
10°	208725
15°	62929
20°	23289
25°	9049
30°	3368
35°	1044
40°	372
45°	186
50°	136
55°	153
60°	175
65°	104
70°	128
75°	169
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 186 cd/sqm

TEST NUMBER: P1245592

CATALOG NUMBER: P3AS02R159024DE010 E3CD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	155.6	57.2
10°-20°	92.5	34.0
20°-30°	19.4	7.1
30°-40°	3.1	1.2
40°-50°	0.5	0.2
50°-60°	0.4	0.1
60°-70°	0.2	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	267.6	98.4
0°-40°	270.7	99.5
0°-60°	271.6	99.9
0°-90°	272.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	272.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2411	
5°	2013	156
15°	277	93
25°	37	19
35°	4	3
45°	1	1
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1245592

CATALOG NUMBER: P3AS02R159024DE010 E3CD1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	2411.1
1°	2403.6
2°	2365.3
3°	2288.7
4°	2176.5
5°	2013.0
6°	1821.0
7°	1601.4
8°	1391.8
9°	1154.4
10°	937.4
12.5°	505.8
15°	277.2
17.5°	162.4
20°	99.8
22.5°	61.1
25°	37.4
27.5°	22.6
30°	13.3
32.5°	7.5
35°	3.9
37.5°	2.2
40°	1.3
42.5°	0.9
45°	0.6
47.5°	0.4
50°	0.4
52.5°	0.4
55°	0.4
57.5°	0.4
60°	0.4
62.5°	0.2
65°	0.2
67.5°	0.2
70°	0.2
72.5°	0.2
75°	0.2
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)