

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1245632

Luminaire Tested: P3AS02R209024DE010 E3DL1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1245632
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R209024DE010 E3DL1H
Description: 3in Adjustable LED luminaire with, R20 optic, 2400K CCT AND, 90CRI , E3DL1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 222.0 lumens
Efficiency: N/A
Efficacy: 61.7 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1245632

CATALOG NUMBER: P3AS02R209024DE010 E3DL1H

Luminous Intensity Polar Plot

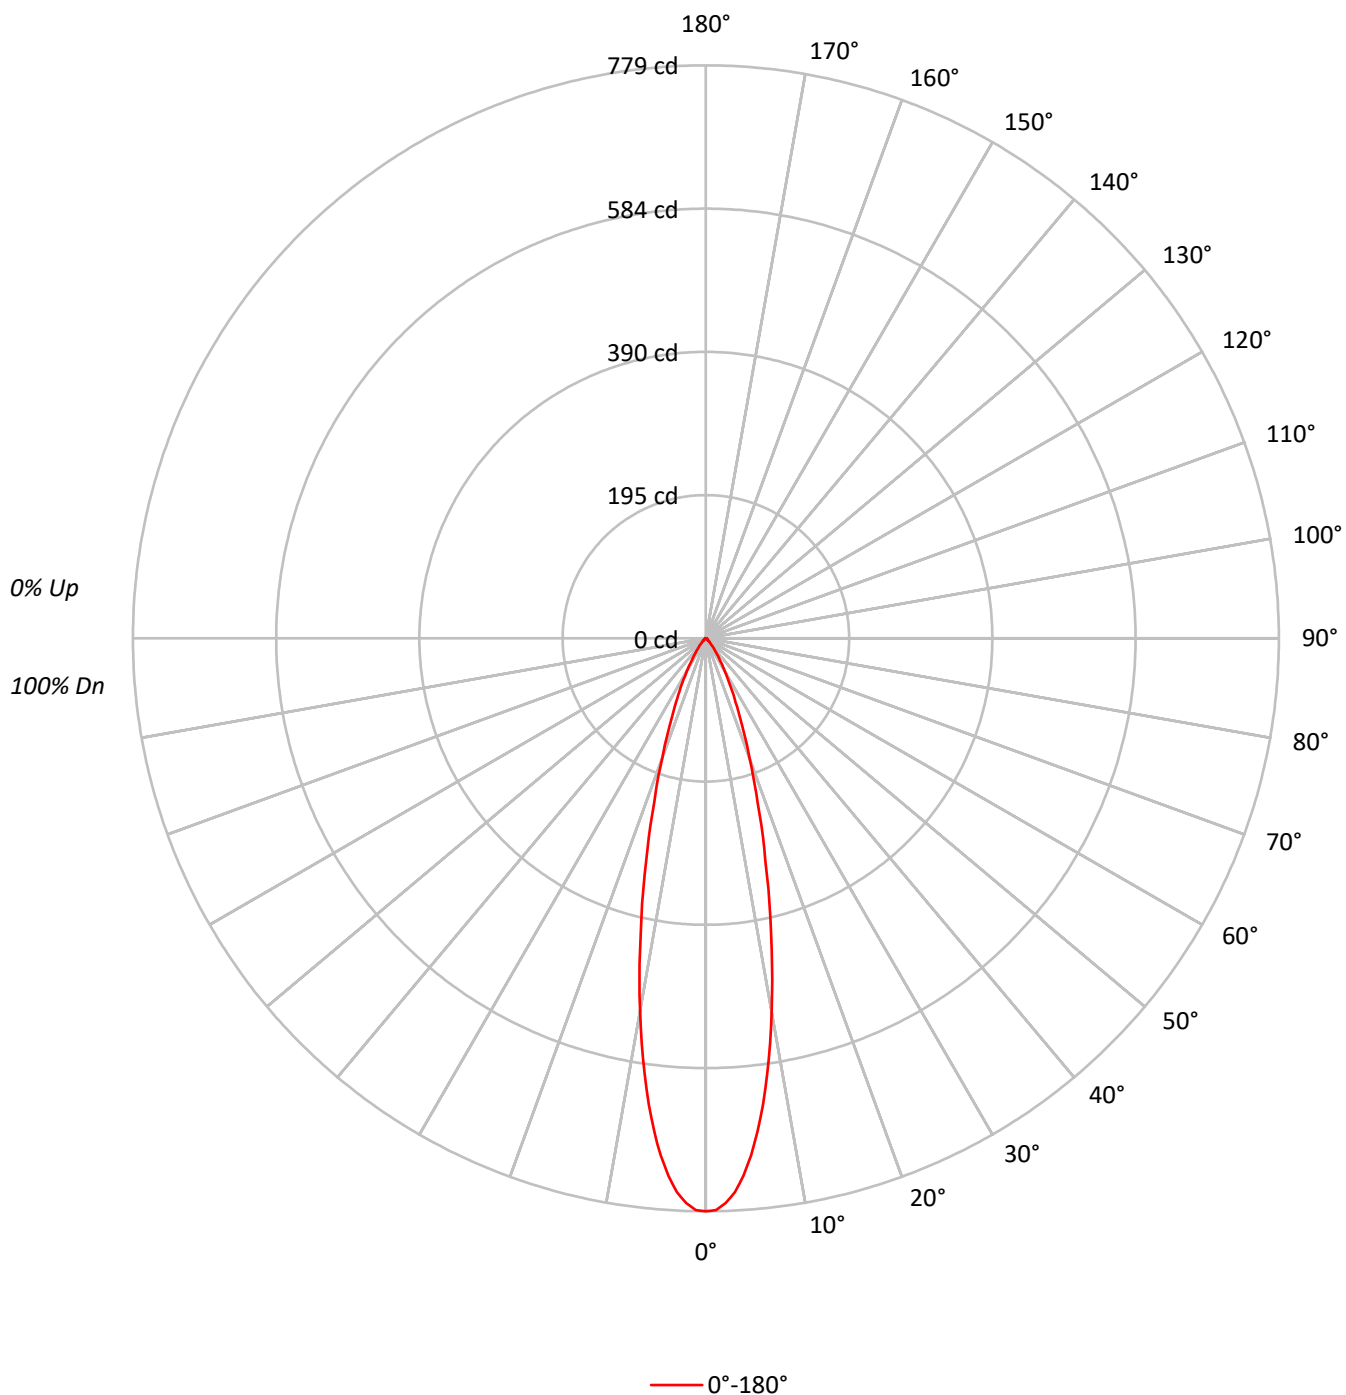

TEST NUMBER: P1245632

CATALOG NUMBER: P3AS02R209024DE010 E3DL1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	110	108		112	110	108	106		106	104	103		102	101	100		99	98	97
2	110	106	102	100		108	104	101	98		101	98	96		98	96	94		95	94	92
3	106	100	96	93		104	99	95	92		97	93	91		94	92	89		92	90	88
4	102	96	91	88		100	95	90	87		92	89	86		91	88	85		89	86	84
5	98	91	87	83		97	90	86	83		89	85	82		87	84	81		86	83	81
6	95	87	83	79		93	87	82	79		85	81	78		84	81	78		83	80	77
7	91	84	79	76		90	83	79	76		82	78	75		81	78	75		80	77	75
8	88	81	76	73		87	80	76	73		79	75	72		78	75	72		78	74	72
9	85	78	73	70		85	77	73	70		77	73	70		76	72	69		75	72	69
10	83	75	71	68		82	75	70	67		74	70	67		73	70	67		73	69	67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	170798
5°	155271
10°	114761
15°	70988
20°	40534
25°	23155
30°	12989
35°	7067
40°	3864
45°	2140
50°	1228
55°	918
60°	833
65°	778
70°	705
75°	763
80°	505
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2140 cd/sqm

TEST NUMBER: P1245632

CATALOG NUMBER: P3AS02R209024DE010 E3DL1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.1	27.5
10°-20°	87.2	39.3
20°-30°	45.5	20.5
30°-40°	17.6	7.9
40°-50°	5.7	2.6
50°-60°	2.2	1.0
60°-70°	1.5	0.7
70°-80°	0.9	0.4
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	193.8	87.3
0°-40°	211.4	95.2
0°-60°	219.4	98.8
0°-90°	222.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	222.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	779	
5°	705	61
15°	313	87
25°	96	46
35°	26	18
45°	7	6
55°	2	2
65°	2	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1245632

CATALOG NUMBER: P3AS02R209024DE010 E3DL1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	778.9
1°	777.4
2°	768.2
3°	754.0
4°	732.2
5°	705.4
6°	673.6
7°	638.5
8°	597.7
9°	558.0
10°	515.4
12.5°	409.6
15°	312.7
17.5°	234.0
20°	173.7
22.5°	128.7
25°	95.7
27.5°	70.6
30°	51.3
32.5°	37.1
35°	26.4
37.5°	19.1
40°	13.5
42.5°	9.7
45°	6.9
47.5°	4.9
50°	3.6
52.5°	2.8
55°	2.4
57.5°	2.1
60°	1.9
62.5°	1.7
65°	1.5
67.5°	1.3
70°	1.1
72.5°	1.1
75°	0.9
77.5°	0.6
80°	0.4
82.5°	0.4
85°	0.2
87.5°	0.2
90°	0.0

(END OF REPORT)