

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1245660

Luminaire Tested: P3AS02R259024DE010 E3DL1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1245660
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-11)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R259024DE010 E3DL1MW
Description: 3in Adjustable LED luminaire with, R25 optic, 2400K CCT AND, 90CRI , E3DL1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 225.0 lumens
Efficiency: N/A
Efficacy: 62.5 lumens/watt
Spacing Criteria (0/90/45): 0.49 / 0.49 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1245660

CATALOG NUMBER: P3AS02R259024DE010 E3DL1MW

Luminous Intensity Polar Plot

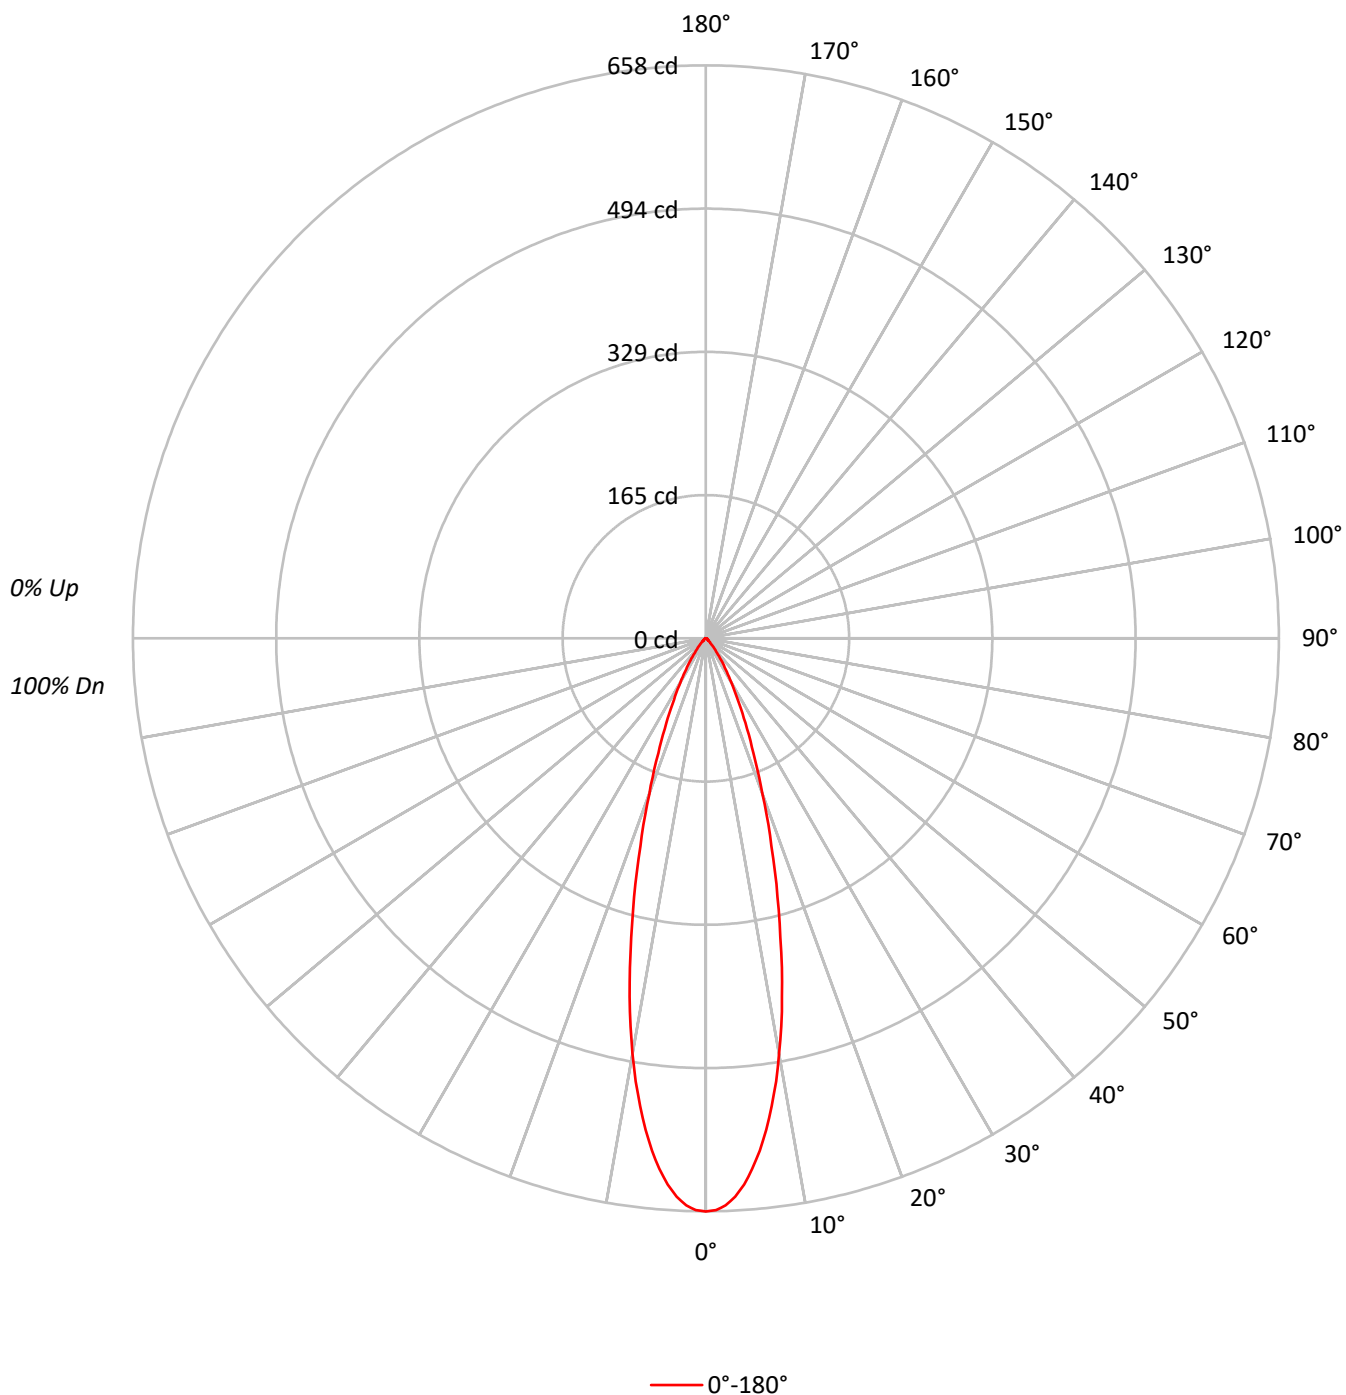

TEST NUMBER: P1245660

CATALOG NUMBER: P3AS02R259024DE010 E3DL1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	110	108		112	110	108	106		106	104	103		102	101	100		99	98	97
2	110	105	102	99		107	104	101	98		101	98	96		98	96	94		95	93	92
3	105	100	96	92		103	98	95	91		96	93	90		94	91	89		91	89	87
4	101	95	90	87		99	94	89	86		92	88	85		90	87	84		88	85	83
5	97	90	85	82		96	89	85	81		88	84	81		86	83	80		85	82	79
6	94	86	81	78		92	86	81	78		84	80	77		83	79	77		82	78	76
7	90	83	78	74		89	82	77	74		81	77	74		80	76	73		79	75	73
8	87	79	74	71		86	79	74	71		78	74	71		77	73	70		76	73	70
9	84	76	71	68		83	76	71	68		75	71	68		74	70	68		73	70	67
10	81	73	69	65		80	73	68	65		72	68	65		72	68	65		71	67	65

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	144331
5°	134646
10°	107880
15°	73213
20°	44314
25°	25913
30°	14762
35°	8111
40°	4322
45°	2264
50°	1330
55°	994
60°	833
65°	882
70°	833
75°	763
80°	505
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2264 cd/sqm

TEST NUMBER: P1245660

CATALOG NUMBER: P3AS02R259024DE010 E3DL1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.3	24.1
10°-20°	88.7	39.4
20°-30°	50.7	22.5
30°-40°	20.0	8.9
40°-50°	6.1	2.7
50°-60°	2.4	1.1
60°-70°	1.6	0.7
70°-80°	0.9	0.4
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	193.6	86.1
0°-40°	213.6	95.0
0°-60°	222.2	98.8
0°-90°	225.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	225.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	658	
5°	612	54
15°	322	89
25°	107	51
35°	30	20
45°	7	6
55°	3	2
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1245660

CATALOG NUMBER: P3AS02R259024DE010 E3DL1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	658.2
1°	656.9
2°	651.5
3°	642.1
4°	628.9
5°	611.7
6°	591.5
7°	568.7
8°	542.3
9°	515.2
10°	484.5
11°	454.1
12°	420.8
13°	387.9
14°	354.1
15°	322.5
17.5°	250.1
20°	189.9
22.5°	142.6
25°	107.1
27.5°	79.3
30°	58.3
32.5°	42.1
35°	30.3
37.5°	21.5
40°	15.1
42.5°	10.3
45°	7.3
47.5°	5.2
50°	3.9
52.5°	3.0
55°	2.6
57.5°	2.4
60°	1.9
62.5°	1.7
65°	1.7
67.5°	1.5
70°	1.3
72.5°	1.1
75°	0.9
77.5°	0.6
80°	0.4
82.5°	0.4
85°	0.2
87.5°	0.2



TEST NUMBER: P1245660

CATALOG NUMBER: P3AS02R259024DE010 E3DL1MW

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)